
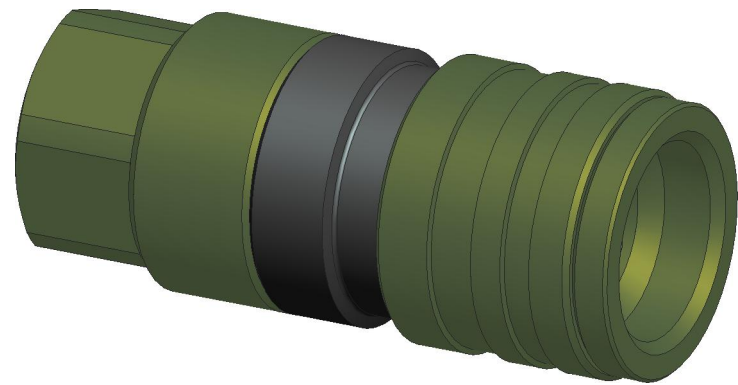
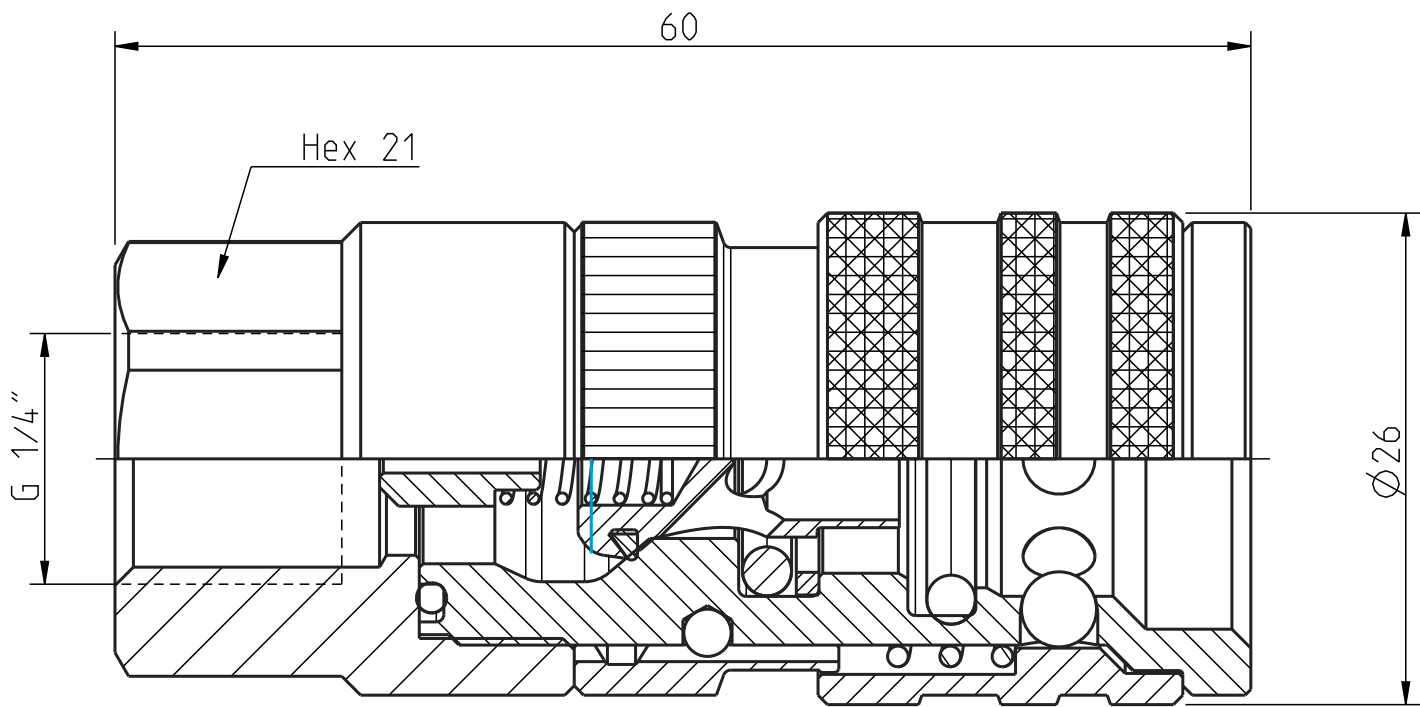


Dessa r  tigheter f  rbeh  lls. Alla r  tigheter f  rbeh  lls.
Genh  mning k  piert eller p  r annan s  tt f  rbeh  lls. All rights reserved.
Genh  mning k  piert eller p  r annan s  tt f  rbeh  lls. All rights reserved.

Denna handling f  r ej utan v  r medgivande delges annan. Kopieras eller eljest obeh  rigen anv  ndas.
  vertr  delse h  rvid beivras med st  d av g  llande lag. This document must not be copied, either completely or in part, without permission.
Any infringement will have legal consequences.



3:2

15	1	Valve stop	Brass
14	1	Valve	Brass
13	1	Spring	Stainless steel
12	1	Spring	Stainless steel
11	1	O-ring	NBR
10	1	O-ring	NBR
9	1	O-ring	NBR
8	1	O-ring	NBR
7	1	Locking sleeve	Steel, Hardened, Zn-Ni
6	1	Locking ring	Steel, Zn-Ni
5	1	Front part	Steel, Zn-Ni
4	1	Ball	Stainless steel
3	8	Ball	Stainless steel
2	1	Back-up ring	PTFE
1	1	Back part	Steel, Zn-Ni

Detalj Item	Antal Quant.	Ben��mning Description	Material Material					
----------------	-----------------	---------------------------	----------------------	--	--	--	--	--

	Skala Scale	5:2	Ritad Drawn	JoEr	Kontr. Checked	-	Godk. Appr.	-	��m nr. Alt. no.	-	Dat. Date	140103
	Assembly drawing						Ritning nr/Drawing No.			50_525_1202		AB

Product no: 10_525_1202		
Max working pressure:	450 bar connected	
	300 bar disconnected	
Min burst pressure:	1800 bar connected	
	1200 bar disconnected	
Sealing material:	NBR	
Temperatur range:	-30�C - 100 �C	
Nominal flow diameter,DN:	6.3 mm	
Connection	G 1/4'' Fem	
Connection stroke:	- mm	