




Dessa r  tigheter f  rbeh  lls.
All rights reserved.
Alle rechte vorbehalten.

Diese Zeichnung darf weder ganz noch teilweise ohne unsere ausdr  ckliche Genehmigung kopiert oder auf andere Weise verv  ltlicht werden.
werden. Zuwiderhandlungen werden gerichtlich verfolgt.

Denna handling f  r ej utan v  t medgivande delges annan. kopieras eller eljest obeh  rigen anv  ndas.
  verr  ttelse h  rvid beivras med st  d av g  llande lag.
This document must not be copied, either completely or in part, without permission.
Any infringement will have legal consequences.



A3

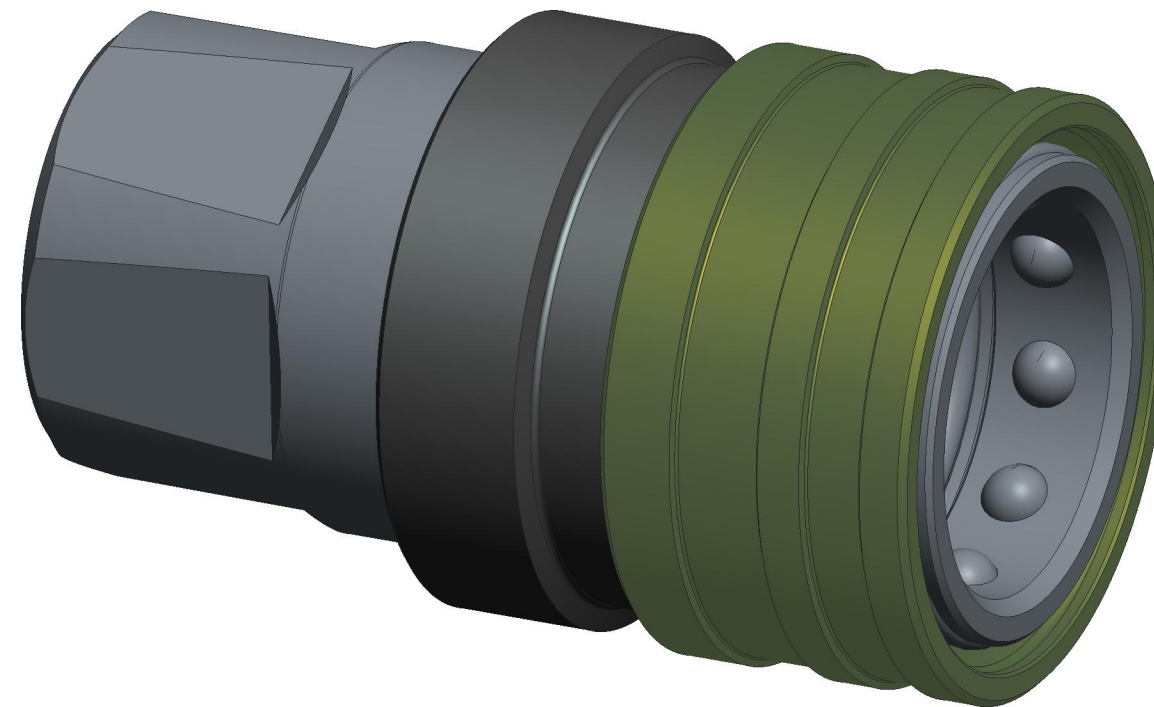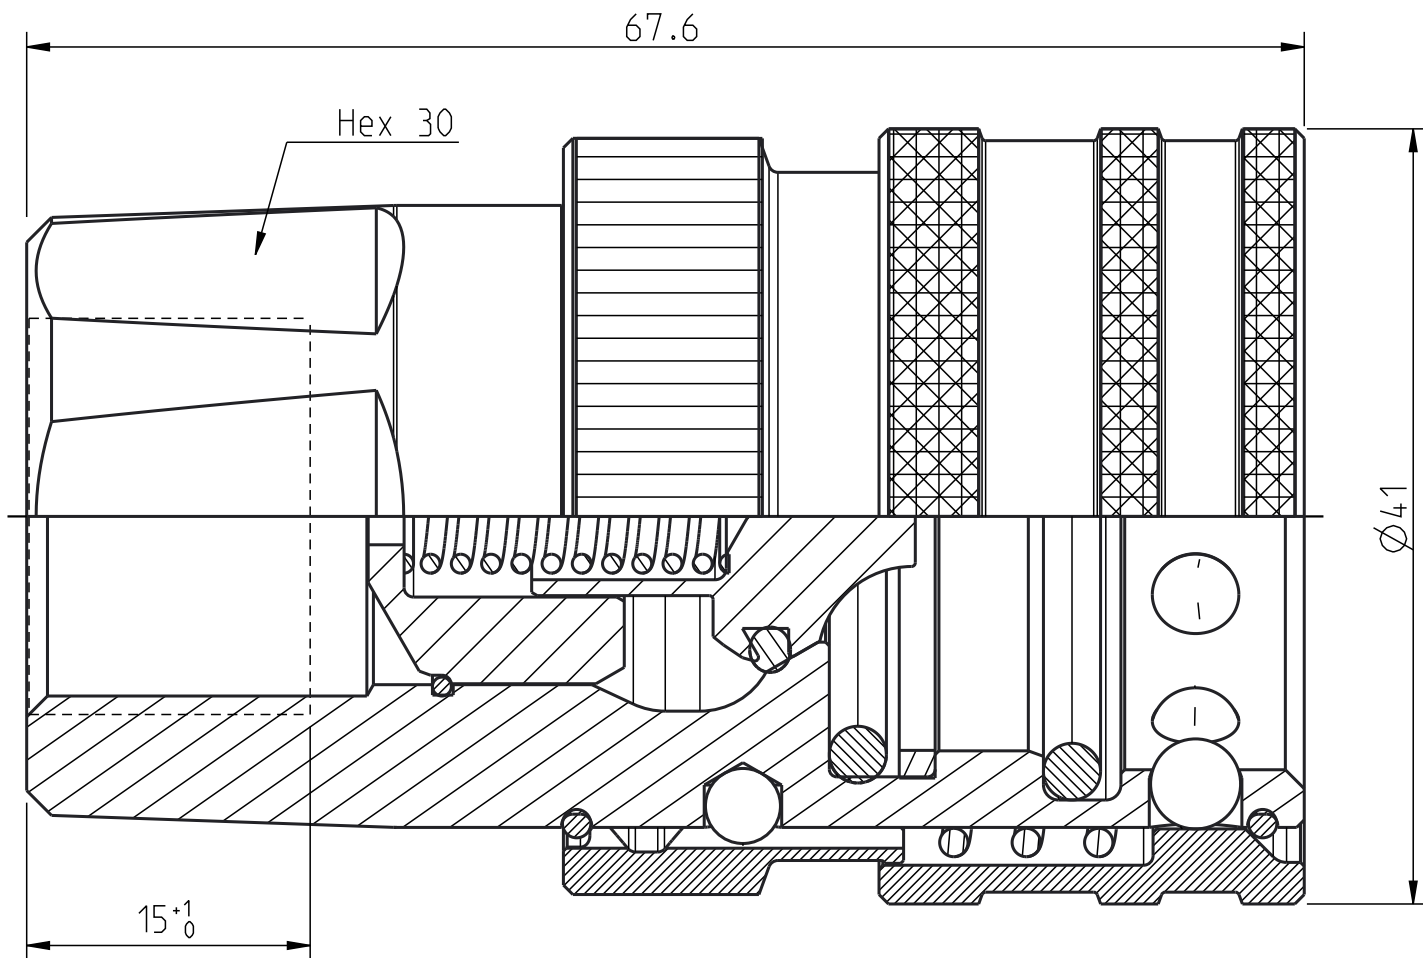

2:1

Product no: 10_525_1205		
Max working pressure:	300 bar connected	
	250 bar disconnected	
Min burst pressure:	1100 bar connected	
	1000 bar disconnected	
Sealing material:	NBR	
Temperatur range:	-30�C - 100 �C	
Nominal flow diameter,DN:	12.5 mm	
Connection	G 1/2'' Fem	
Connection stroke:	- mm	

15	1	O-ring	NBR
14	2	Wire coil	Stainless steel
13	1	Back-up ring	PTFE
12	1	Body	Steel, Zn-Ni
11	1	Valve stop	Brass
10	1	Locking ring	Steel, Zn-Ni
9	1	Spring	Stainless steel
8	1	Spring	Stainless steel
7	1	O-ring	NBR
6	1	Wire coil	Stainless steel
5	1	Locking sleeve	Steel, hardened, Zn-Ni
4	10	Ball	Stainless steel
3	1	O-ring	NBR
2	1	Ball	Stainless steel
1	1	Valve	Steel, Zn-Ni
Detalj Item	Antal Quant.	Ben��mning Description	Material Material

	Skala Scale	5:2	Rit��d Drawn	-	Kontr. Checked	-	Godk. Appr.	-	��m nr. Alt. no.	-	Dat. Date	-
	Assembly drawing		Ritning nr/Drawing No.				50_525_1205		Utg./Issue			AC