
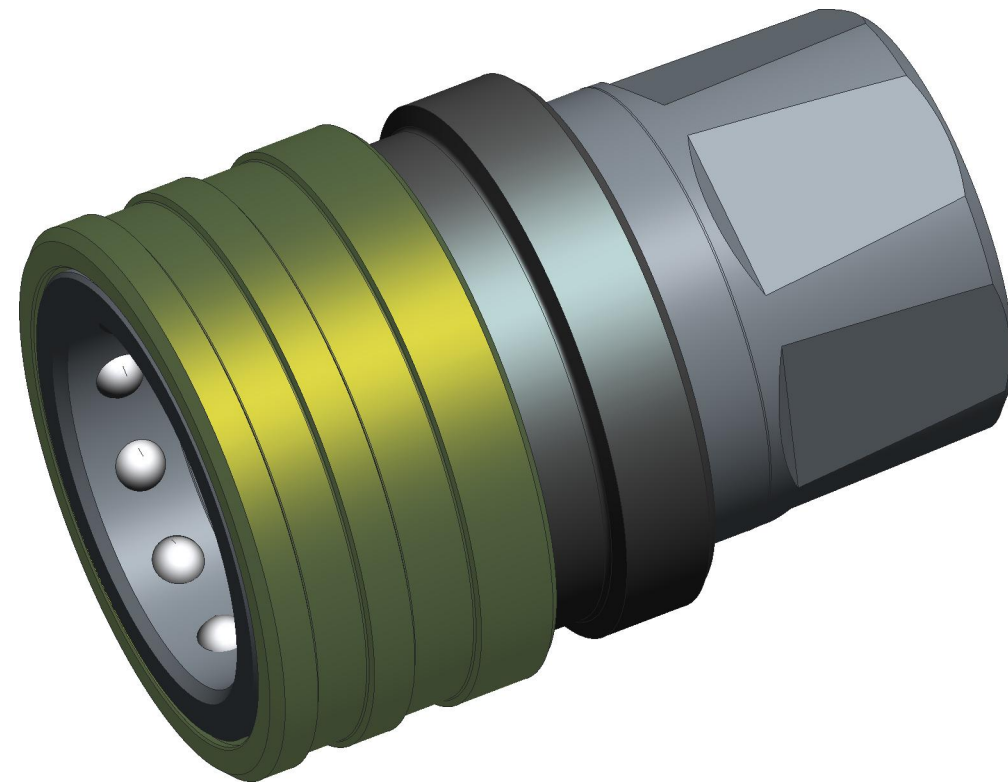


Product no: 10_525_1207		
Max working pressure:	280	bar connected
	200	bar disconnected
Min burst pressure:	1000	bar connected
	800	bar disconnected
Sealing material:	NBR	
Temperatur range:	-30°C - +100 °C	
Nominal flow diameter,DN:	20	mm
Connection	G 3/4" Fem	
Connection stroke:	-	mm

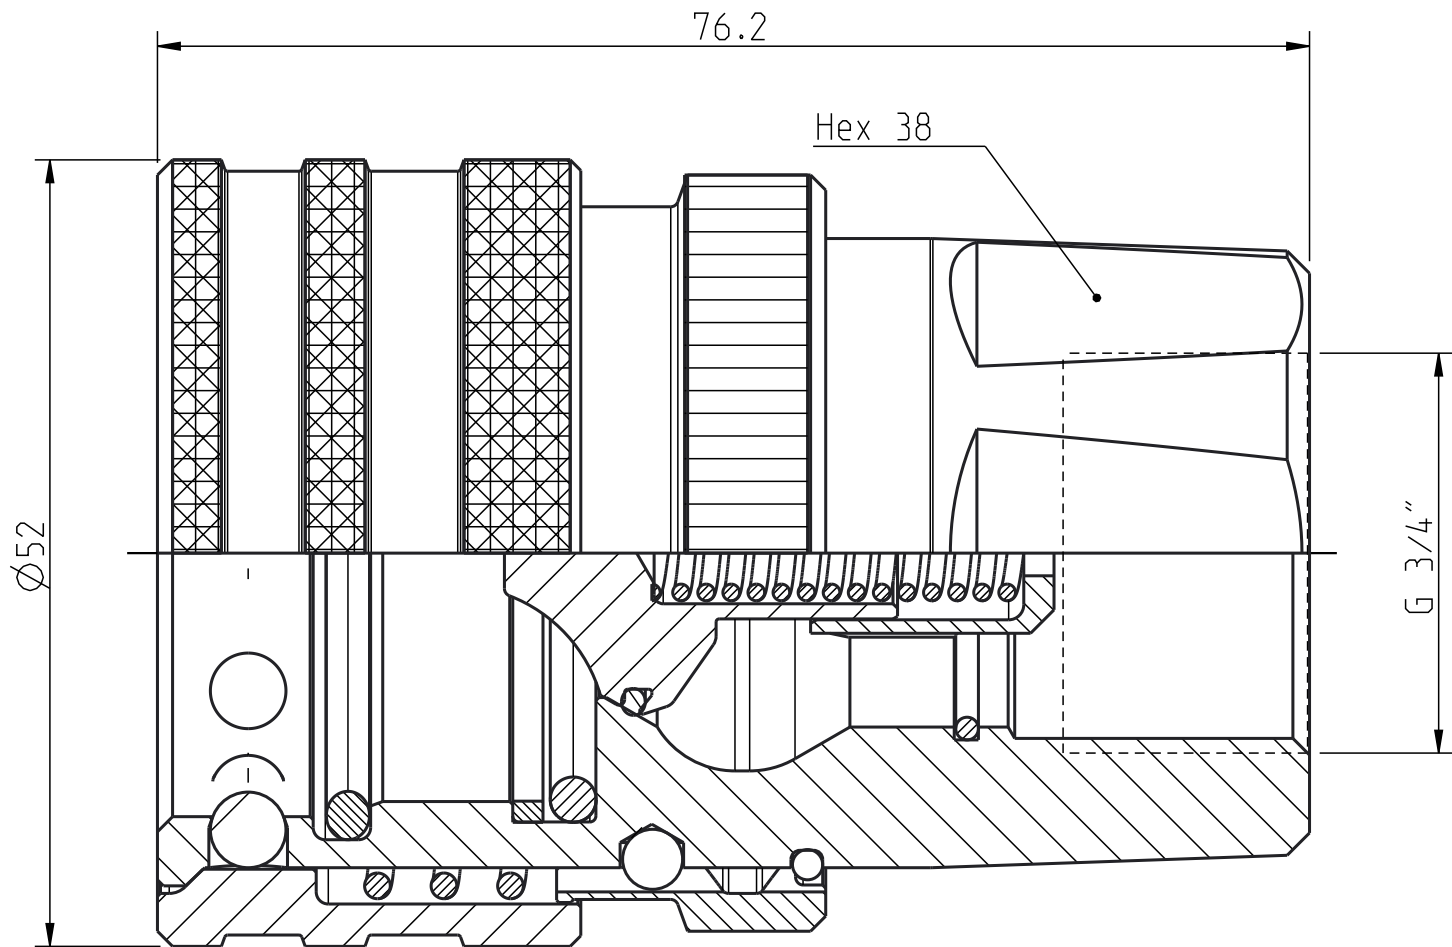

3:2

15	1	Wire coil	Steel
14	1	Wire coil	Steel
13	1	Valve stop	Brass
12	1	Valve	Steel, Zn-Ni
11	1	Spring	Stainless steel
10	1	Spring	Stainless steel
9	1	O-ring	NBR
8	1	O-ring	NBR
7	1	O-ring	NBR
6	1	Locking sleeve	Steel, hardened, Zn-Ni
5	1	Locking ring	Steel,Zn-Ni
4	1	Body	Steel, Zn-Ni
3	12	Ball	Stainless steel
2	1	Ball	Stainless steel
1	1	Back-up ring	PTFE
Detalj Item	Antal Quant.	Benämning Description	Material Material

	Skala Scale	2:1	Ritad Drawn	JoEr	Kontr. Checked	-	Godk. Appr.	-	Äm nr. Alt. no.	-	Dat. Date	140103
	Assembly drawing		Ritning nr./Drawing No.				50_525_1207		Utg./Issue			AC