
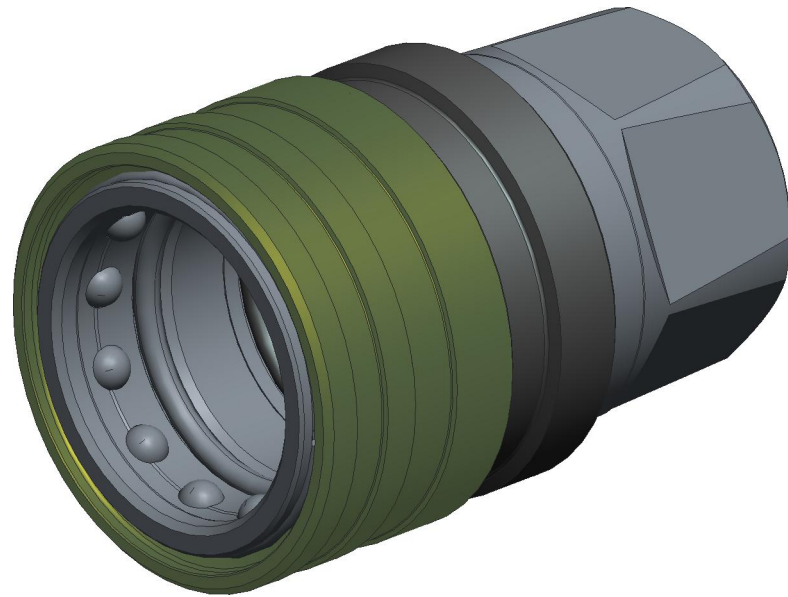


Denna handling förbehåller sig alla rättigheter förbehålls.
This document must not be copied, either completely or in part, without permission.
Any infringement will have legal consequences.

Dessa tecken förbehåller sig alla rättigheter förbehålls.
This document must not be copied, either completely or in part, without permission.
Any infringement will have legal consequences.

A3

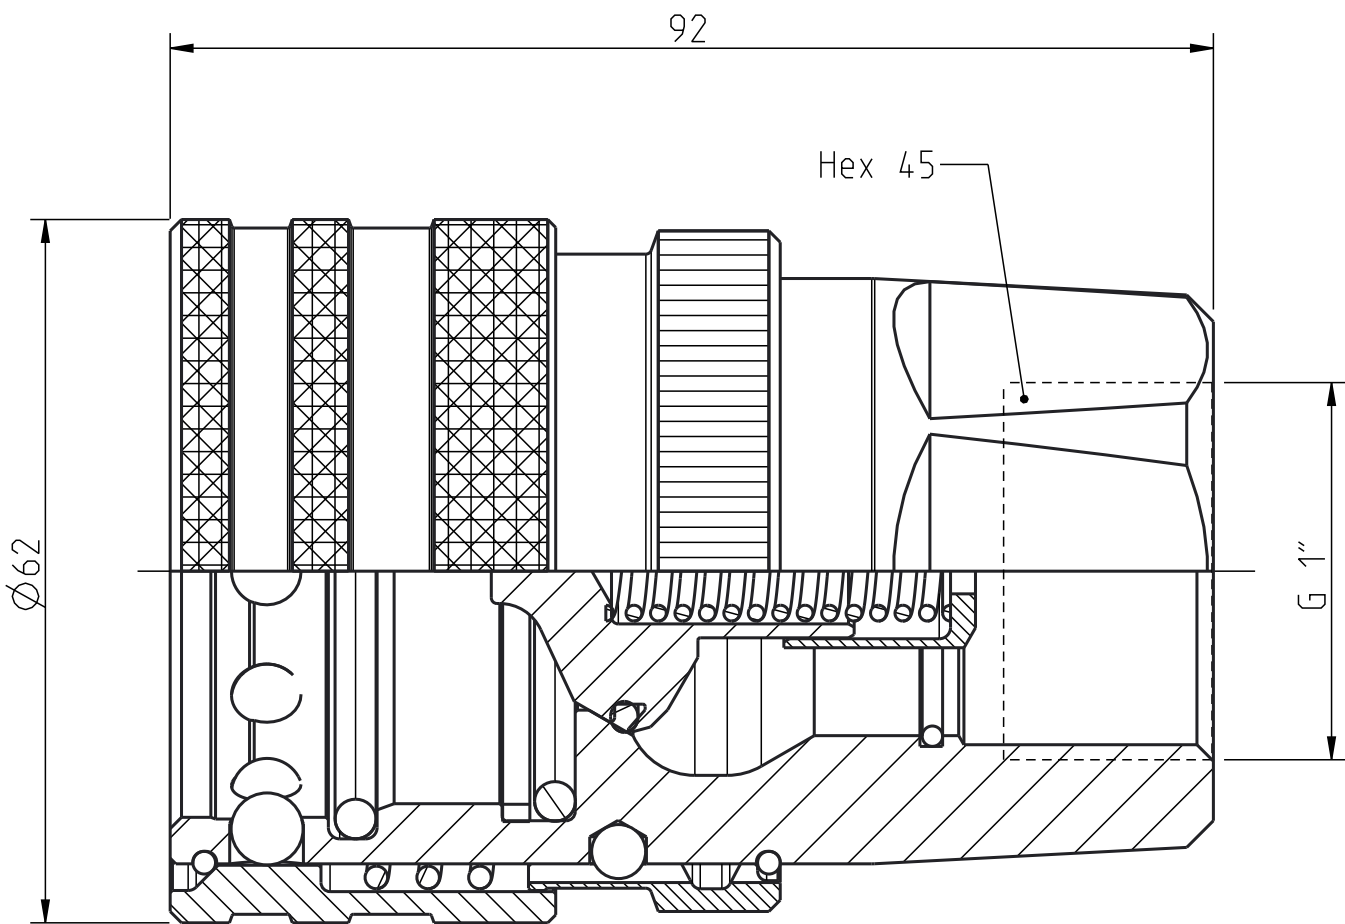

1:1

15	1	Wire coil	Stainless steel
14	2	Wire coil	Stainless steel
13	1	Valve stop	Brass
12	1	Valve	Steel, Zn-Ni / NBR
11	1	Spring	Stainless steel
10	1	Spring	Stainless steel
9	1	O-ring	NBR
8	1	O-ring	NBR
7	1	O-ring	NBR
6	1	Locking sleeve	Steel, hardened, Zn-Ni
5	1	Locking ring	Steel, Zn-Ni
4	1	Body	Steel, Zn-Ni
3	12	Ball	Stainless steel
2	1	Ball	Stainless steel
1	1	Back-up ring	PTFE
Detalj Item	Antal Quant.	Benämning Description	Material Material

Product no: 10_525_1209		
Max working pressure:	250 bar connected	250 bar disconnected
Min burst pressure:	930 bar connected	1000 bar disconnected
Sealing material:	NBR	
Temperatur range:	-30°C - 100 °C	
Nominal flow diameter,DN:	25 mm	
Connection	G 1" Fem	
Connection stroke:	- mm	

	Skala Scale	3:2	Ritad Drawn	JoEr	Kontr. Checked	-	Godk. Appr.	-	Äm nr. Alt. no.	-	Dat. Date	140103
	Assembly drawing						Ritning nr/Drawing No.			Utg./Issue		
						50_525_1209			AC			