

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



A3



D

C

B

A

G 3/8-19

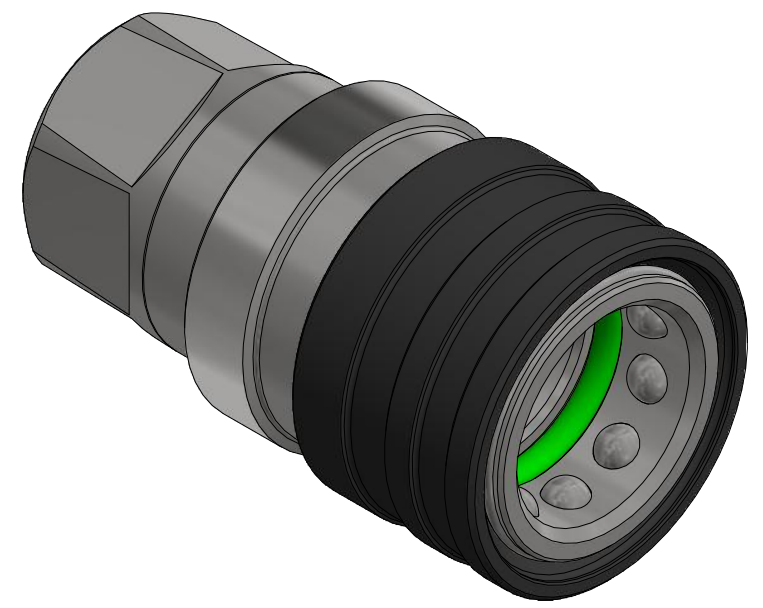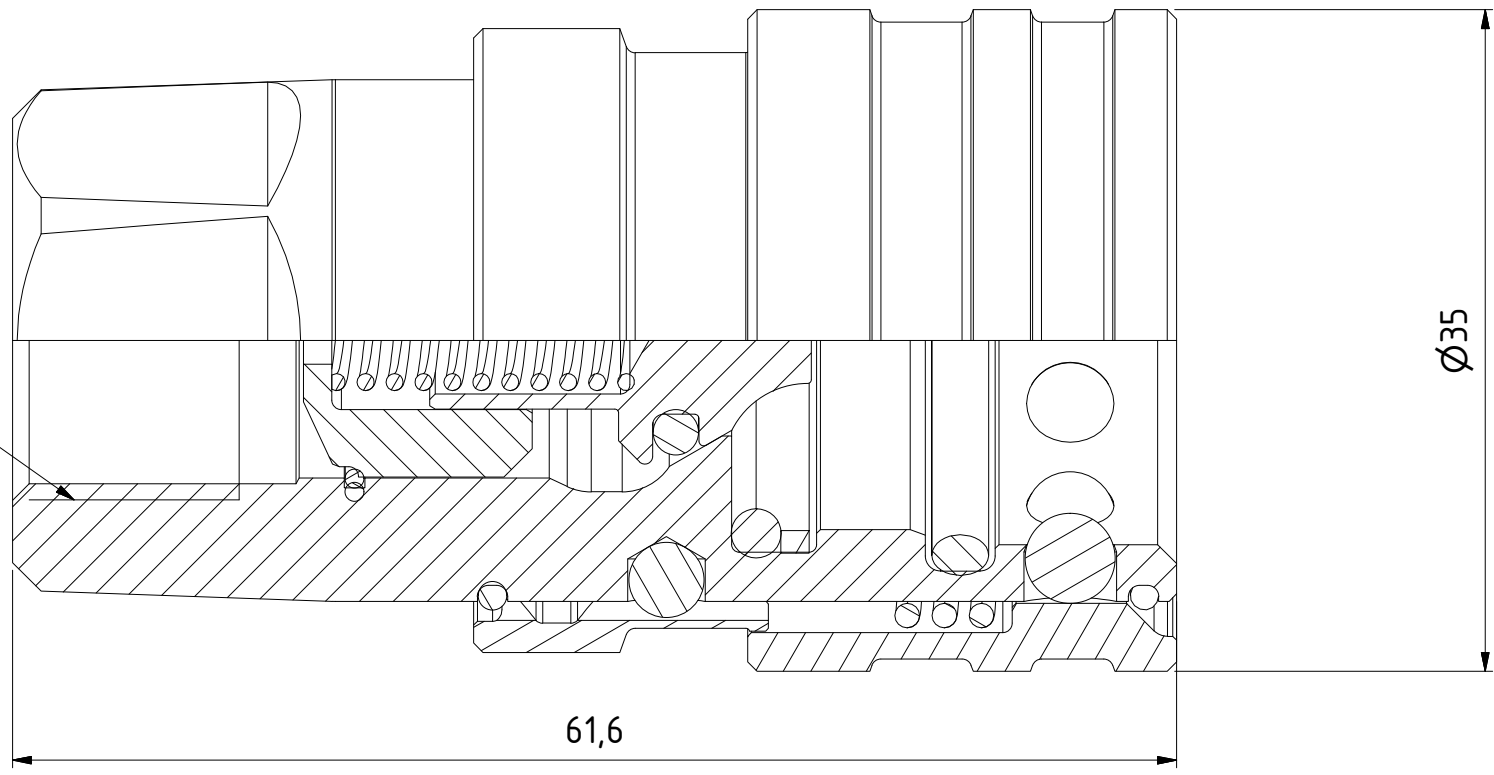

D

C

B

A

Product No. 105251214	
Nominal flow Ø DN:	10 mm
Connection Stroke:	- mm
Max WP Connected:	350 bar
Max WP Disconnected:	280 bar
Min BP Connected:	1300 bar
Min BP Disconnected:	1100 bar
Temperature range:	-15°C - 215°C
Connection:	G 3/8" Fem
Sealing material:	FPM
Hexagon:	24

15	1	O-ring	FPM	095252813
14	1	O-ring	FPM	095252814
13	1	Valve	Steel, Zn-Ni	085253010
12	1	O-ring	FPM	096672811
11	1	Ball	Stainless steel	091154800
10	1	Back-up ring	PTFE	095255601
9	1	Wire coil	Stainless steel	095252611
8	1	Spring	Stainless steel	095253110
7	1	Valve stop	Steel, Zn-Ni	095253910
6	10	Ball	Stainless steel	093554800
5	1	Spring	Stainless steel	095253210
4	1	Locking ring	Steel, Zn-Ni	095253310
3	1	Locking sleeve	Steel, Zn-Ni	095252510
2	2	Wire coil	Stainless steel	095252610
1	1	Body	Steel, Zn-Ni	095255324
Item	Qty	Description	Material	Part Number
		Scale 2,5 : 1	Drawn PeOd	Checked
		Appr.	ECO	Date 2019-01-24
Assembly Drawing 505251214				Drawing No.
				Issue AA
				Sheet 1 /(1)