
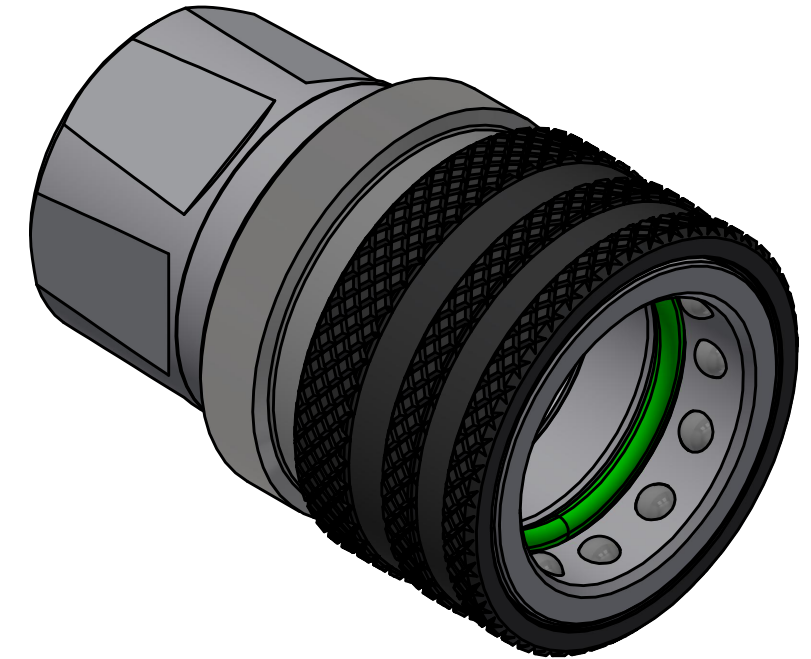


This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©

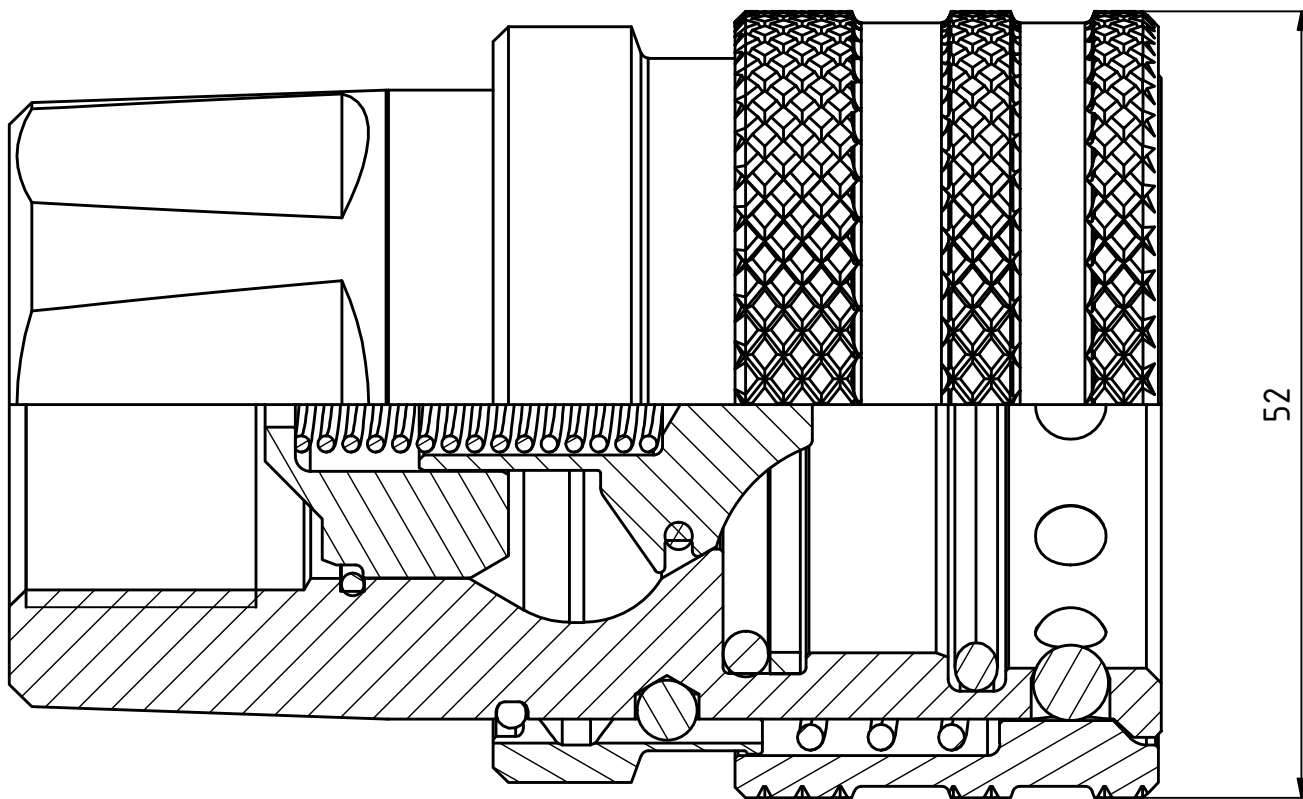

Product No. 105251217	
Nominal flow Ø DN:	20 mm
Connection Stroke:	- mm
Max WP Connected:	280 bar
Max WP Disconnected:	200 bar
Min BP Connected:	1000 bar
Min BP Disconnected:	800 bar
Temperature range:	-15°C - +215°C
Connection:	G 3/4" Fem
Sealing material:	FPM
Hexagon:	38

15	1	O-ring	FPM	095252819
14	1	O-ring	FPM	095252818
13	1	O-ring	FPM	095142814
12	1	Valve	Steel, Zn-Ni	085253030
11	1	Wire coil	Steel	095252630
10	1	Spring	Stainless steel	095253230
9	1	Locking ring	Steel,Zn-Ni	095253330
8	1	Locking sleeve	Steel, hard, Zn-Ni	095252530
7	1	Ball	Stainless steel	091154800
6	12	Ball	Stainless steel	092154800
5	1	Back-up ring	PTFE	095255603
4	1	Wire coil	Steel	095252631
3	1	Spring	Stainless steel	095253130
2	1	Valve stop	Brass	095253930
1	1	Body	Steel, Zn-Ni	095255327
Item	Qty	Description	Material	Part Number
		Scale	Drawn	Checked
		2 : 1	PeOd	ECO
Assembly Drawing		Drawing No.		Date
		105251217		2019-01-25
		Issue		Sheet
		B		1 /(1)