
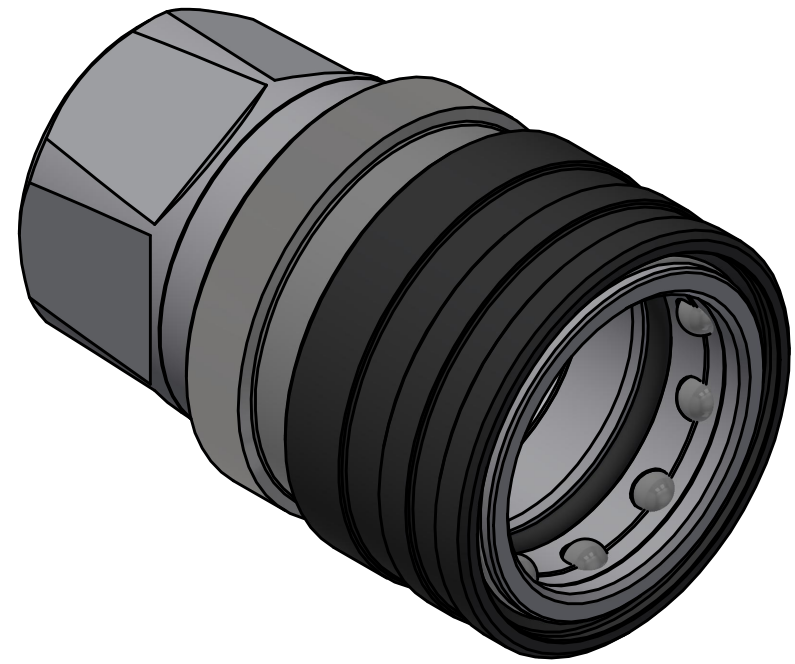


This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©

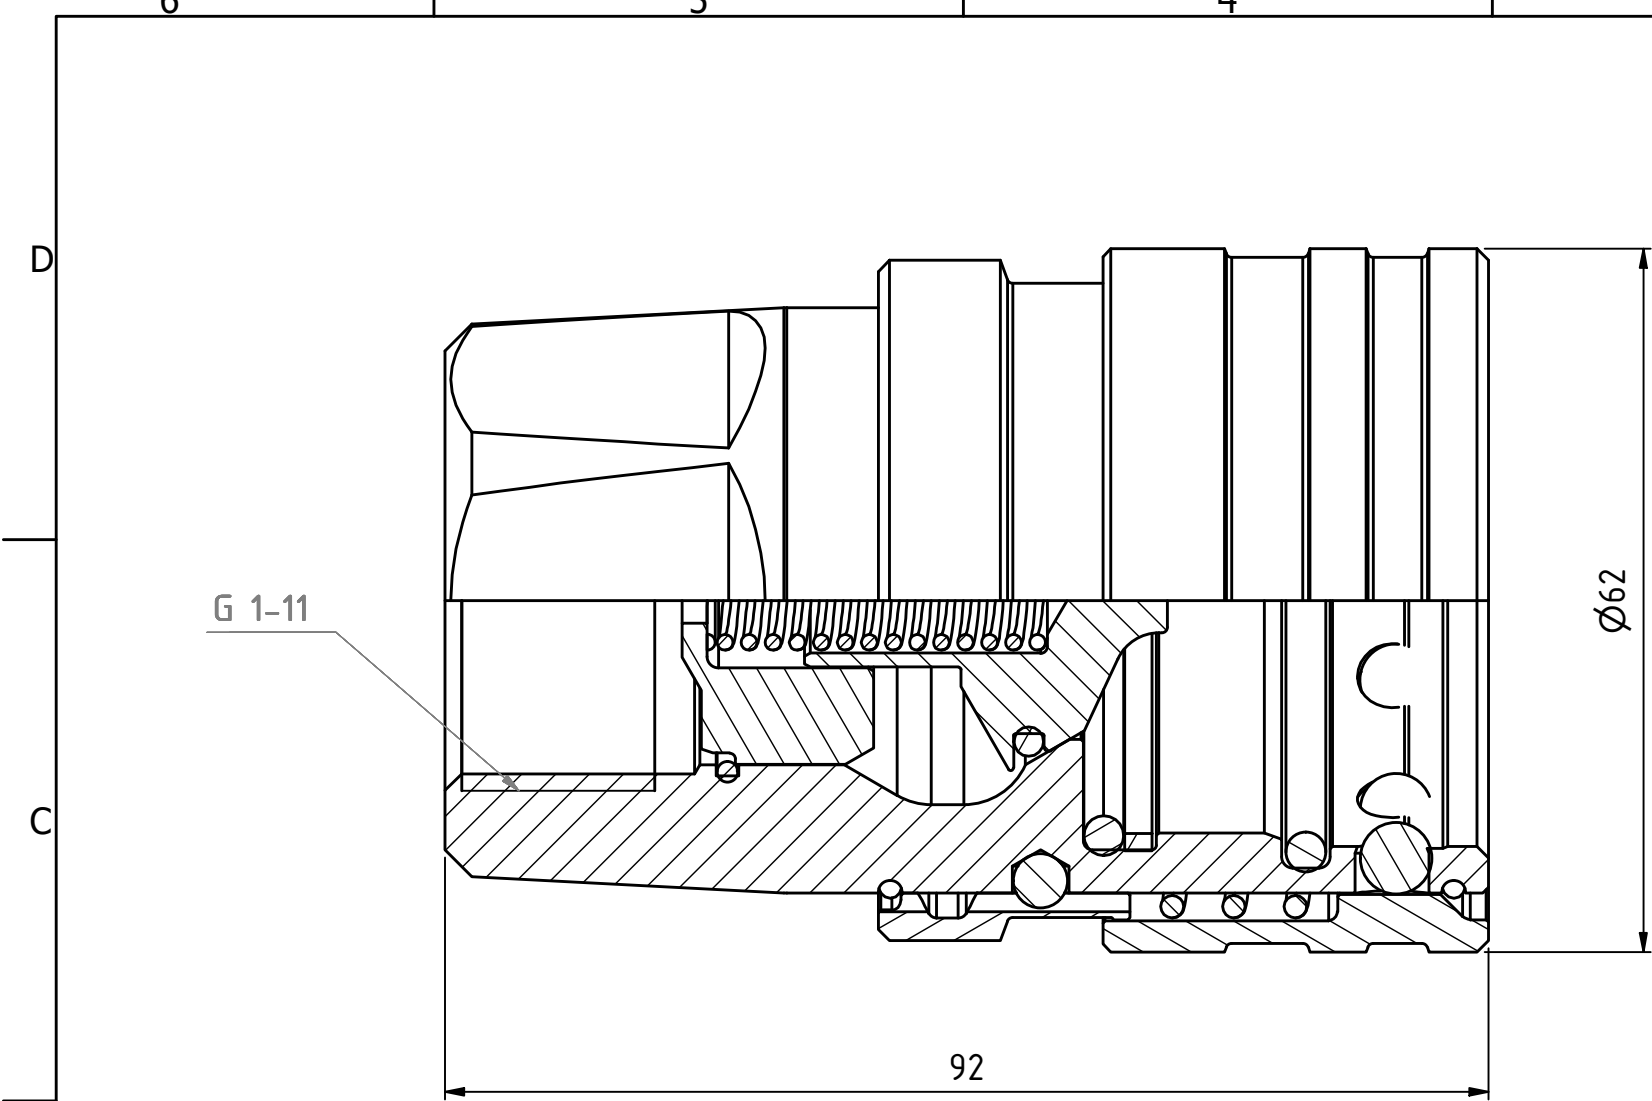

Product No. 105251219	
Nominal flow Ø DN:	25 mm
Connection Stroke:	- mm
Max WP Connected:	250 bar
Max WP Disconnected:	250 bar
Min BP Connected:	930 bar
Min BP Disconnected:	1000 bar
Temperature range:	-15°C - 215°C
Connection:	G 1" Fem
Sealing material:	FPM
Hexagon:	45

15	1	O-ring	FPM	095252817
14	1	O-ring	FPM	099842813
13	1	O-ring	FPM	099642813
12	1	Valve	Steel, Zn-Ni / NBR	085253040
11	1	Back-up ring	PTFE	095255604
10	1	Spring	Stainless steel	095253240
9	1	Wire coil	Stainless steel	095252641
8	1	Locking sleeve	Steel, hardened, Zn-Ni	095252540
7	10	Ball	Stainless steel	096044800
6	1	Locking ring	Steel, Zn-Ni	095253340
5	2	Wire coil	Stainless steel	095252640
4	1	Ball	Stainless steel	093554800
3	1	Spring	Stainless steel	095253140
2	1	Valve stop	Brass	095253940
1	1	Body	Steel, Zn-Ni	095255329
Item	Qty	Description	Material	Part Number
		Scale 1,5 : 1	Drawn PeOd	Checked
		Appr.		ECO
		Date 2019-01-25		Issue
		Drawing No. 105251219		Sheet
		Assembly Drawing		A 1 / (1)