

Alla rättigheter förbehålls.
 All rights reserved.
 Alle Rechte vorbehalten.



Diese Zeichnung darf weder ganz noch teilweise ohne unsere ausdrückliche Genehmigung kopiert oder auf andere Weise vervielfältigt werden.

Denna handling får ej utan vårt medgivande delges annan, kopieras eller eljest obehörigen användas.

Överträdelse härvid beivras med stöd av gällande lag.

This document must not be copied, either completely or in part, without permission.

Any infringement will have legal consequences.

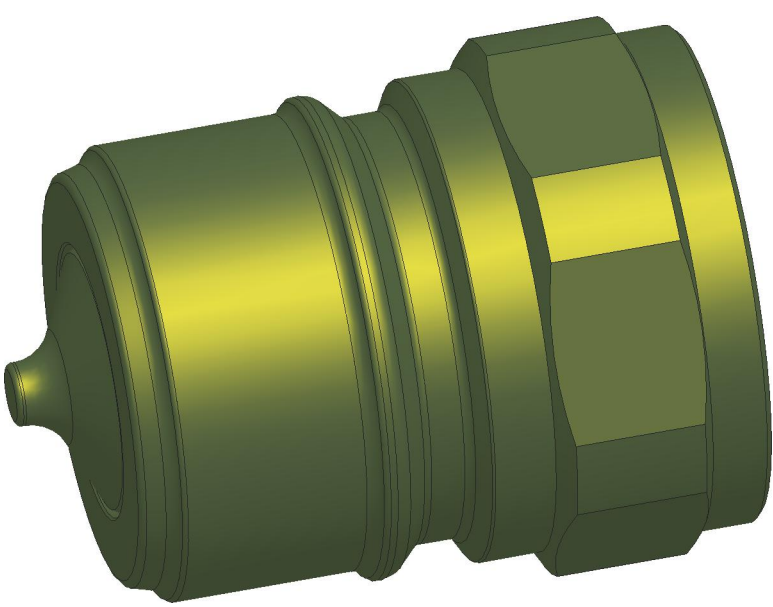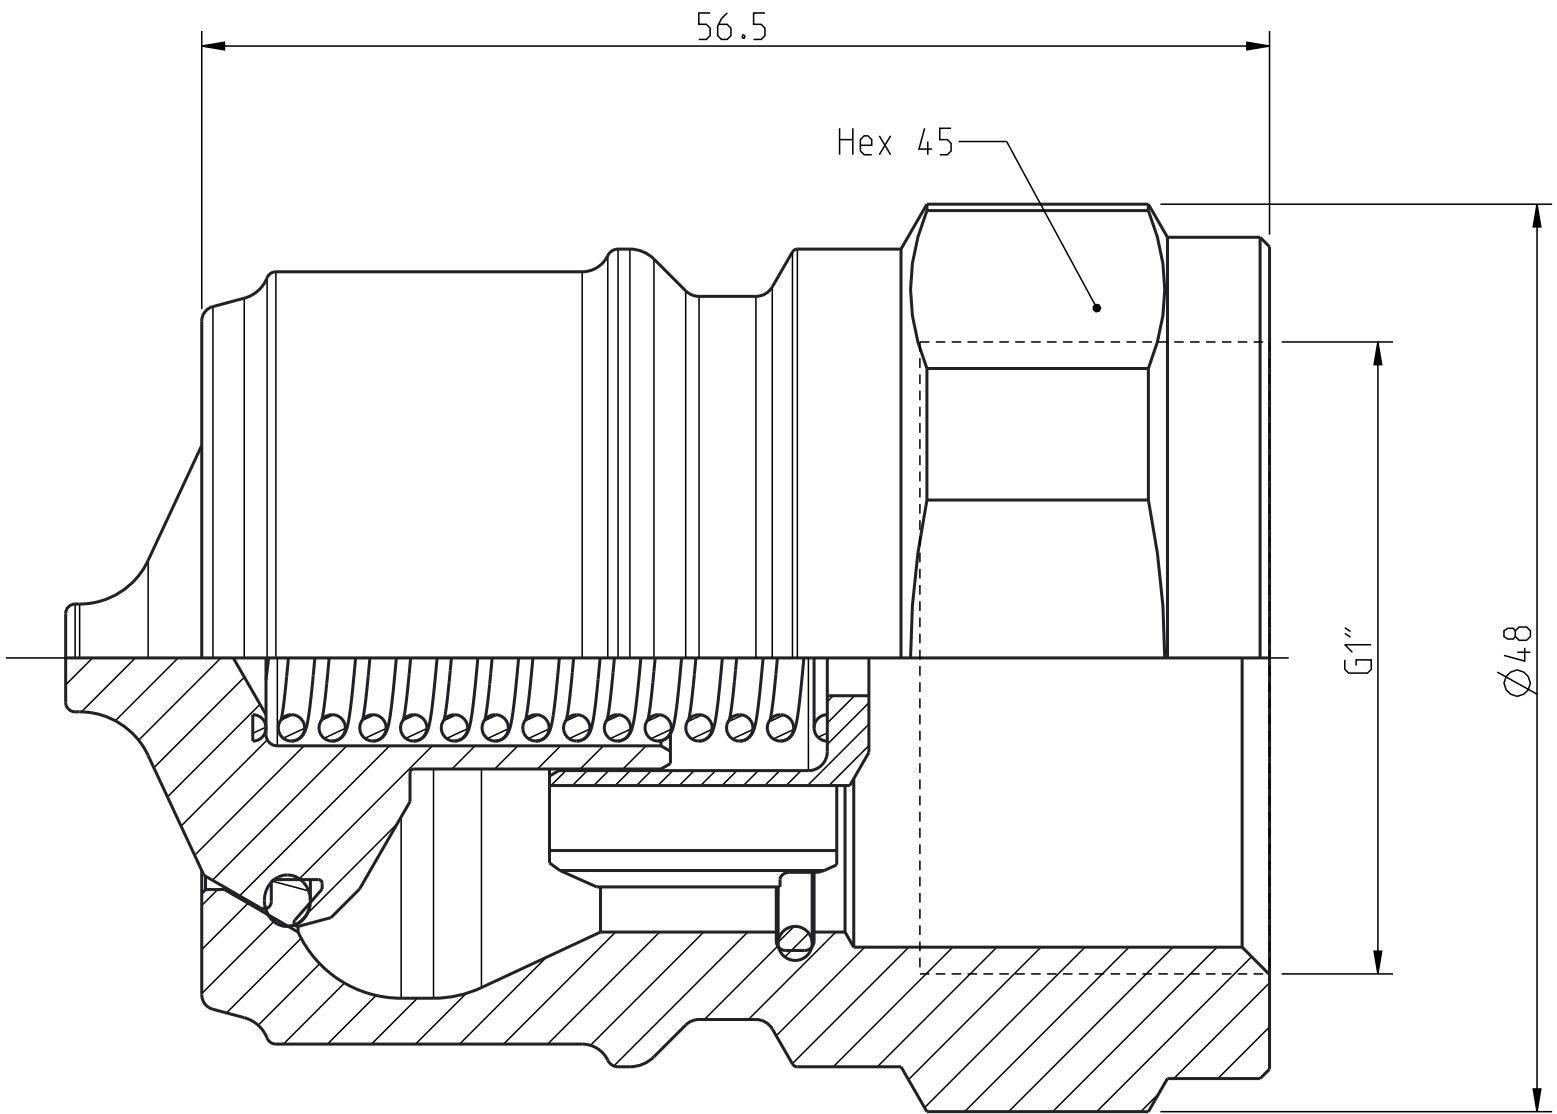

3:2

Product no: 10_525_6209		
Max working pressure:	250	bar connected
	250	bar disconnected
Min burst pressure:	930	bar connected
	1000	bar disconnected
Sealing material:	NBR	
Temperatur range:	-30°C - +100 °C	
Nominal flow diameter,DN:	25	mm
Connection	G 1" Fem	
Connection stroke:	-	mm

6	1	O-ring	NBR
5	1	Valve stop	Brass
4	1	Spring	Stainless steel
3	1	Wire coil	Stainless steel
2	1	Nipple body	Steel, hardened, Zn-Ni
1	1	Valve	Steel, Zn-Ni / NBR
Detalj Item	Antal Quant.	Benämning Description	Material Material

	Skala Scale	5:2	Ritad Drawn	JoEr	Kontr. Checked	-	Godk. Appr.	-	Äm nr. Alt. no.	-	Dat. Date	140107
	Assembly drawing		Ritning nr/Drawing No.				50_525_6209		Utg./Issue			AC