

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©





D

C

B

A

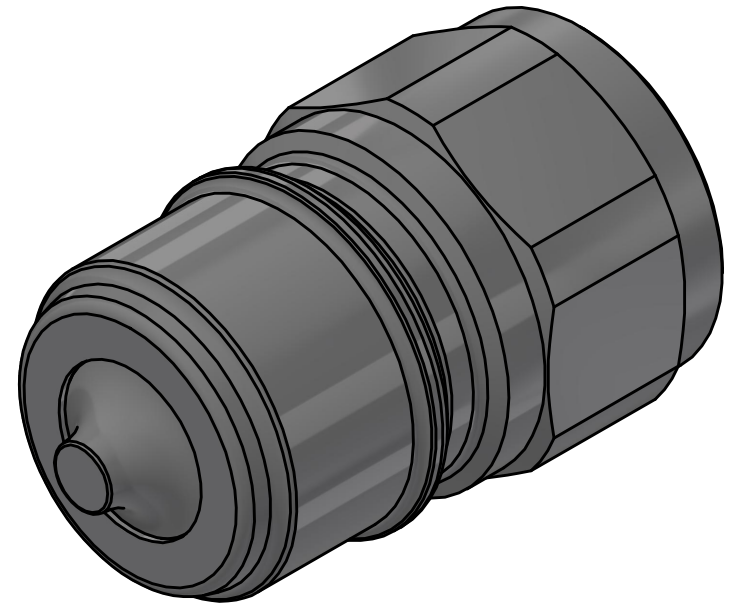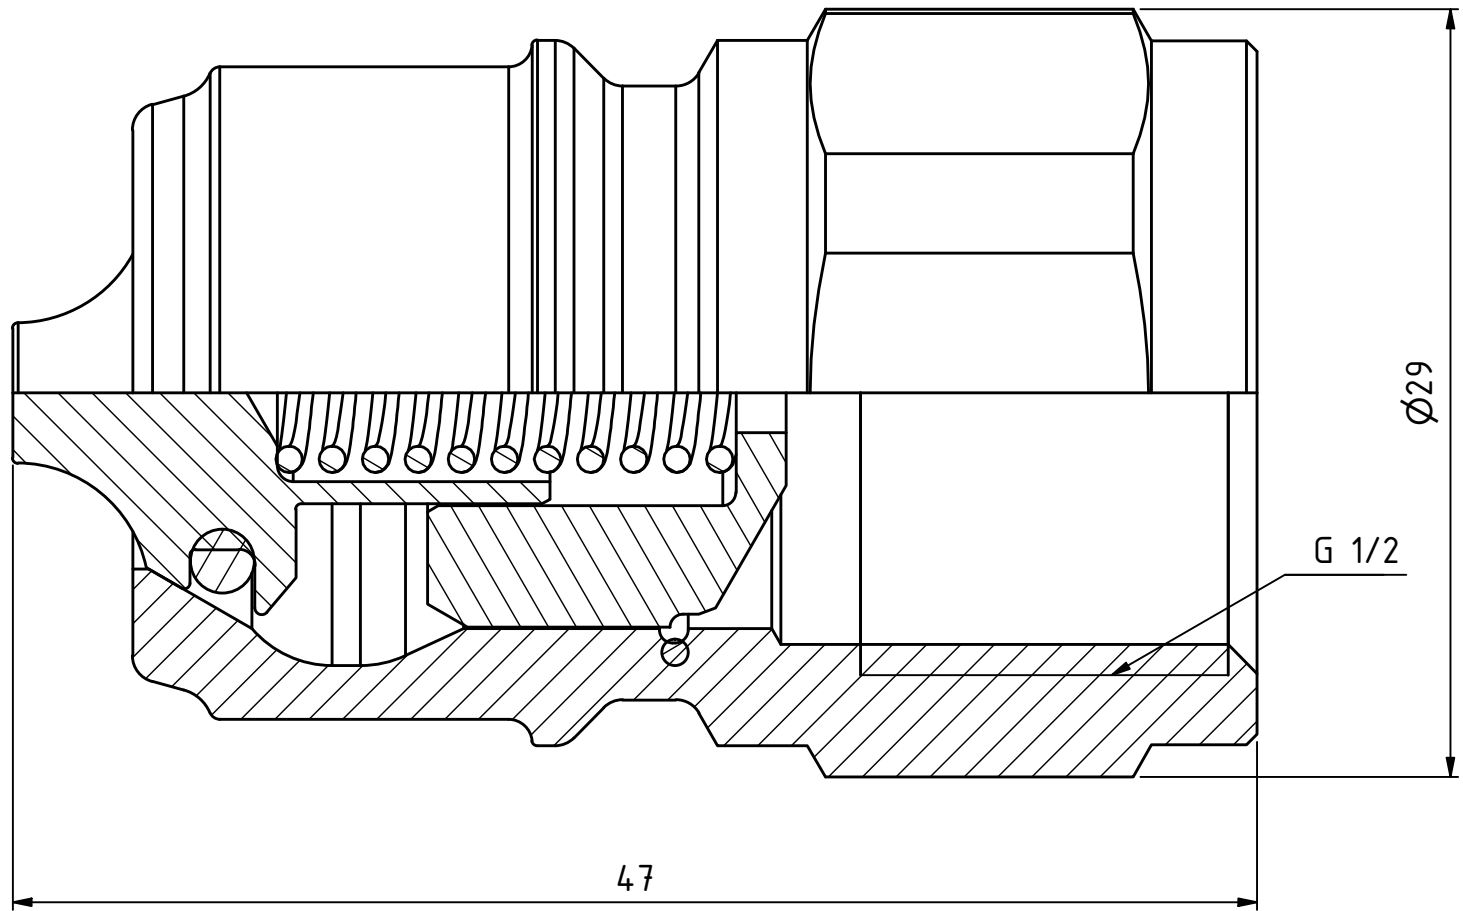

D

C

B

A

Product No. 105256215	
Nominal flow Ø DN:	12.5 mm
Connection Stroke:	- mm
Max WP Connected:	300 bar
Max WP Disconnected:	250 bar
Min BP Connected:	1100 bar
Min BP Disconnected:	1000 bar
Temperature range:	-15°C - +225°C
Connection:	G 1/2" Fem
Sealing material:	FPM
Hexagon:	27

6	1	O-ring	FPM	092152810
5	1	Valve	Steel, Zn-Ni	085253020
4	1	Spring	Stainless steel	095253120
3	1	Wire coil	Stainless steel	095252621
2	1	Valve stop	Brass	095253920
1	1	Nipple body	Steel, Zn-Ni	095252325
Item	Qty	Description	Material	Part Number
		Scale 3,5 : 1	Drawn PeOd	Checked
		Appr. -		ECO
		Date 070614		
		Drawing No. 105256215		Issue A
		Sheet 1 /(1)		



Assembly Drawing 105256215