
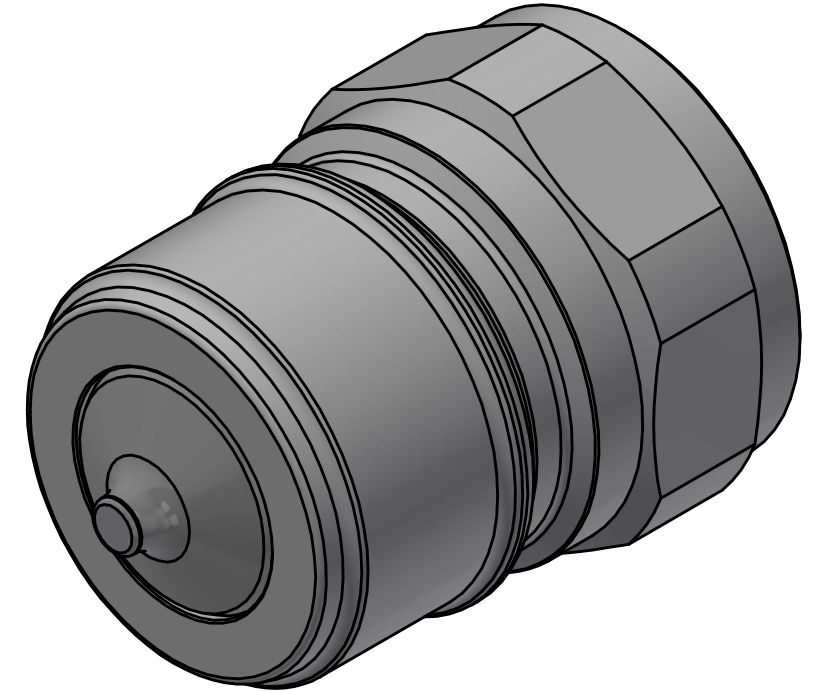


This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©

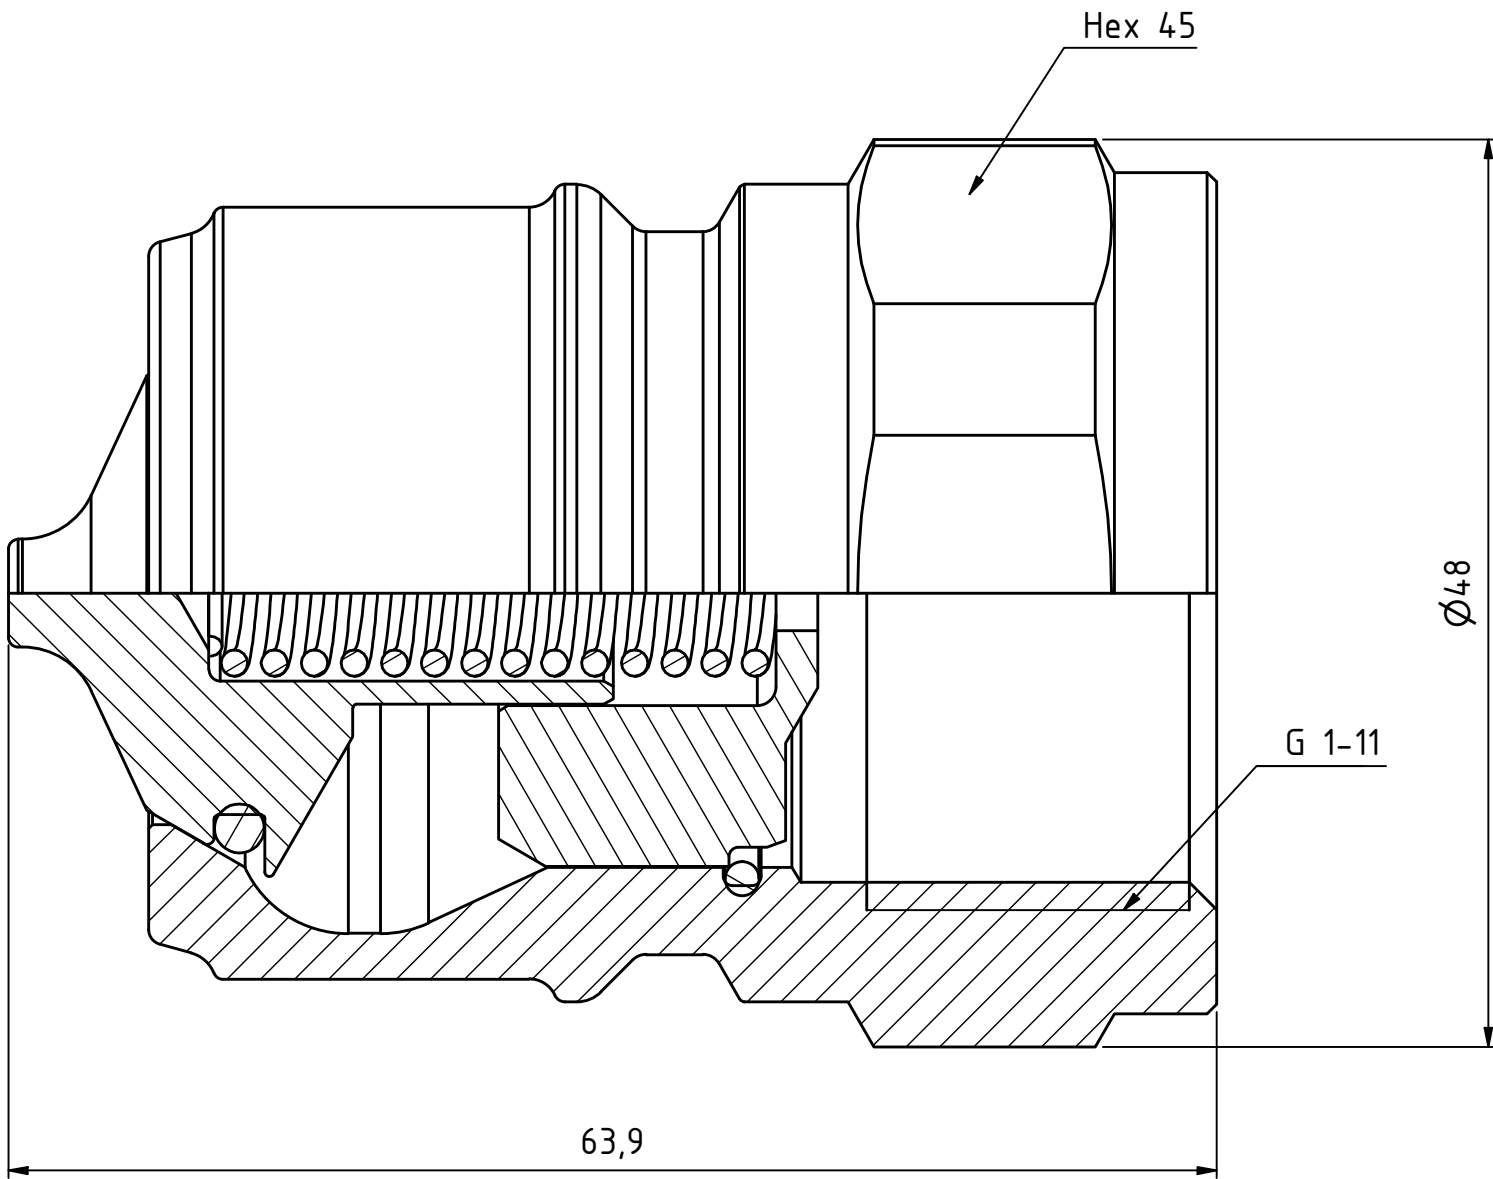

Product No. 105256219	
Nominal flow Ø DN:	25 mm
Connection Stroke:	- mm
Max WP Connected:	250 bar
Max WP Disconnected:	250 bar
Min BP Connected:	930 bar
Min BP Disconnected:	1000 bar
Temperature range:	-15°C - +225°C
Connection:	G 1" Fem
Sealing material:	FPM
Hexagon:	45

6	1	O-ring	FPM	099642813
5	1	Valve	Steel, Zn-Ni / NBR	085253040
4	1	Wire coil	Stainless steel	095252641
3	1	Spring	Stainless steel	095253140
2	1	Valve stop	Brass	095253940
1	1	Nipple body	Steel, hardened, Zn-Ni	095252329
Item	Qty	Description	Material	Part Number
		Scale 2,5 : 1	Drawn PeOd	Checked
		Appr. -		ECO
		Date 2019-01-28		Issue
		Drawing No. 105256219		Sheet
		Assembly Drawing		A 1 /(1)