


|                           |                |     |              |
|---------------------------|----------------|-----|--------------|
| Max working pressure:     | 280            | bar | connected    |
|                           | 200            | bar | disconnected |
| Min burst pressure:       | 1000           | bar | connected    |
|                           | 800            | bar | disconnected |
| Sealing material:         | NBR            |     |              |
| Temperatur range:         | -30°C - 100 °C |     |              |
| Nominal flow diameter,DN: | 20             | mm  |              |
| Connection                | G 3/4" Fem     |     |              |
| Connection stroke:        | -              | mm  |              |

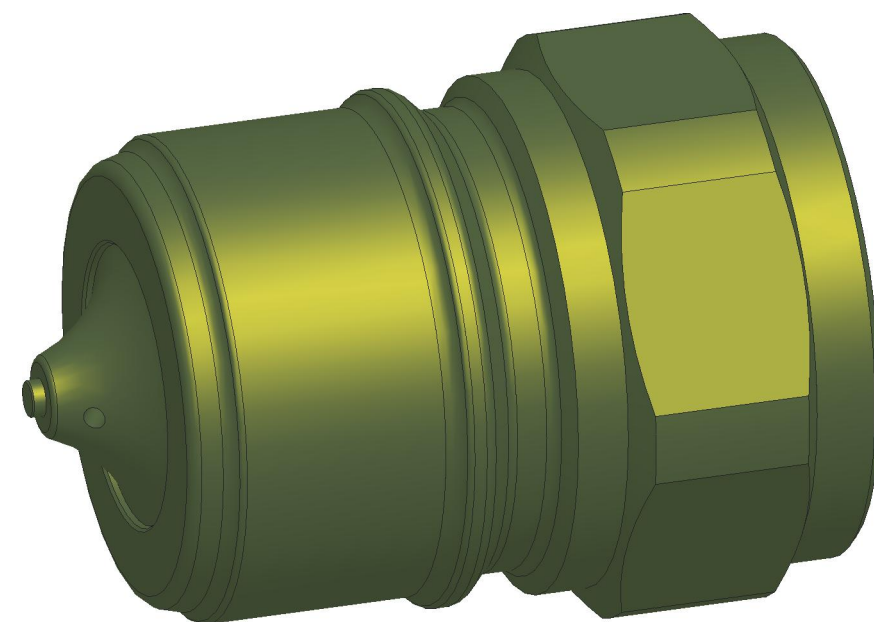

2:1

|                  |     |                |   |                   |   |                        |   |                    |            |              |          |
|------------------|-----|----------------|---|-------------------|---|------------------------|---|--------------------|------------|--------------|----------|
| Skala<br>Scale   | 5:2 | Ritad<br>Drawn | – | Kontr.<br>Checked | – | Godk.<br>Appr.         | – | AM nr.<br>Alt. no. | –          | Dat.<br>Date | 14 01 07 |
| Assembly drawing |     |                |   |                   |   | Ritning nr/Drawing No. |   |                    | Utg./Issue |              |          |
| 50_525_6237      |     |                |   |                   |   | AB                     |   |                    |            |              |          |