


Denna handling förbehåller sig alla rättigheter förbehålls.
All rights reserved.
Alle Rechte vorbehalten.

Denna handling förbehåller sig alla rättigheter förbehålls.
All rights reserved.
Alle Rechte vorbehalten.

A3

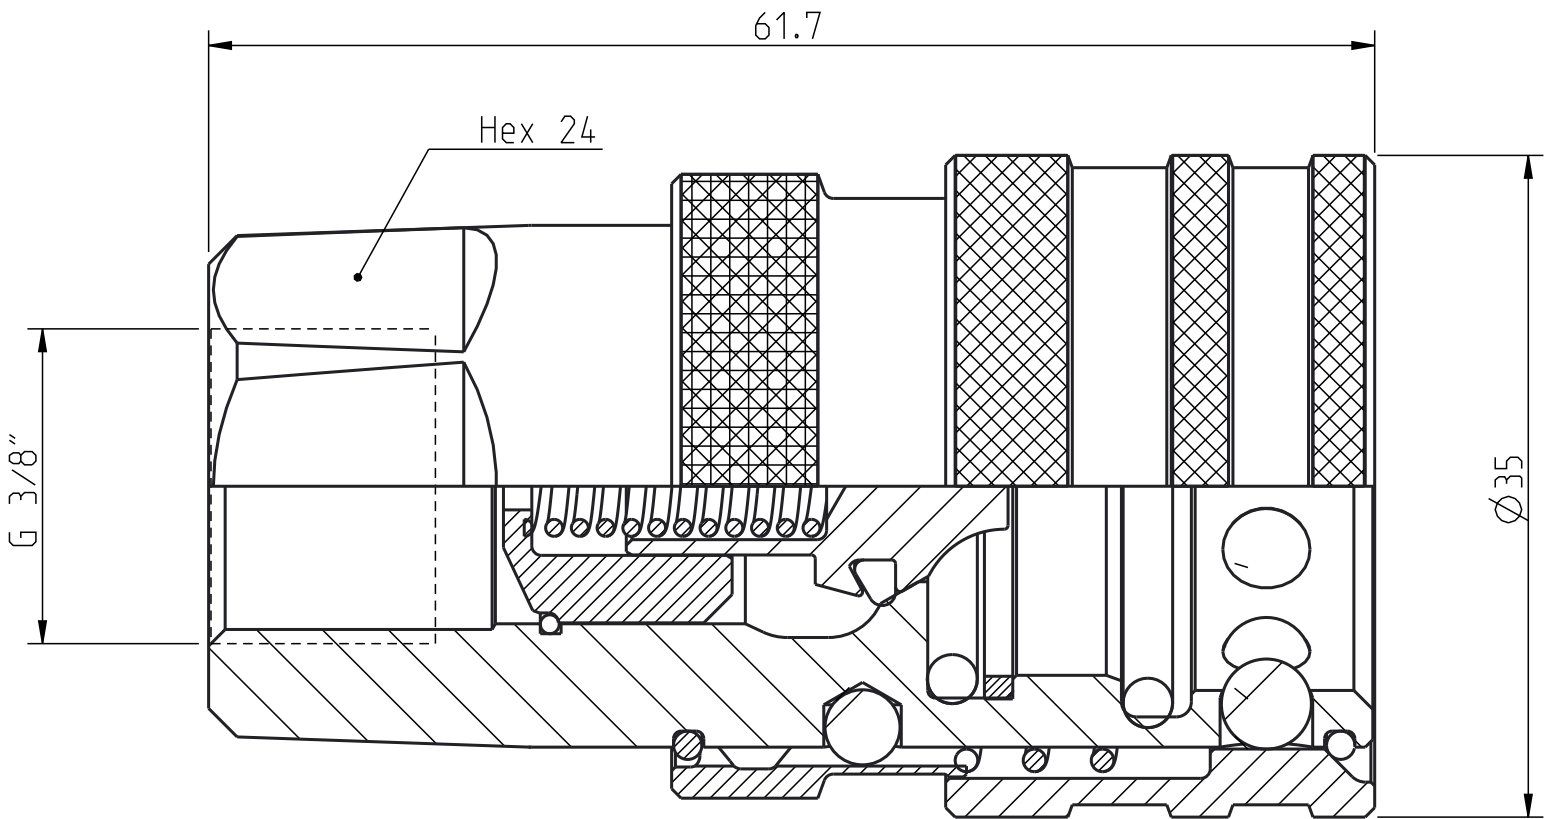

Product no: 10_526_1214		
Max working pressure:	300 bar connected	
	250 bar disconnected	
Min burst pressure:	1200 bar connected	
	1000 bar disconnected	
Sealing material:	FPM	
Temperatur range:	-20°C - +205 °C	
Nominal flow diameter,DN:	10 mm	
Connection	G 3/8" Fem	
Connection stroke:	- mm	

15	1	Wire coil	Stainless steel
14	2	Wire coil	Stainless steel
13	1	Valve stop	Stainless steel
12	1	Valve	Stainless steel
11	1	Spring	Stainless steel
10	1	Spring	Stainless steel
9	1	O-ring	FPM
8	1	O-ring	FPM
7	1	O-ring	FPM
6	1	Locking sleeve	Stainless steel
5	1	Locking ring	Stainless steel
4	1	Body	Stainless steel
3	10	Ball	Stainless steel
2	1	Ball	Acid proof steel
1	1	Back-up ring	PTFE
Detalj Item	Antal Quant.	Benämning Description	Material Material

	Skala Scale	5:2	Ritad Drawn	JoEr	Kontroll. Checked	-	Godk. Appr.	-	Äm nr. Alt. no.	-	Dat. Date	120402
	Assembly drawing		Ritning nr/Drawing No.				50_526_1214		Utg./Issue			AB