


Denna handling förbehålls.
Alla rättigheter förbehålls.
All rights reserved.
Alle Rechte vorbehalten.

Diese Zeichnung darf weder ganz noch teilweise ohne unsere ausdrückliche Genehmigung kopiert oder auf andere Weise vervielfältigt werden.
werden. Zuwiderhandlungen werden gerichtlich verfolgt.

Övertryck eller annan skada vid användning utan tillstånd från CEJN.
This document must not be copied, either completely or in part, without permission.
Any infringement will have legal consequences.

Product no: 10_526_1215		
Max working pressure:	300 bar connected	
	250 bar disconnected	
Min burst pressure:	1200 bar connected	
	1000 bar disconnected	
Sealing material:	FPM	
Temperatur range:	-20°C - +205 °C	
Nominal flow diameter,DN:	12.5 mm	
Connection	G 1/2" Fem	
Connection stroke:	- mm	

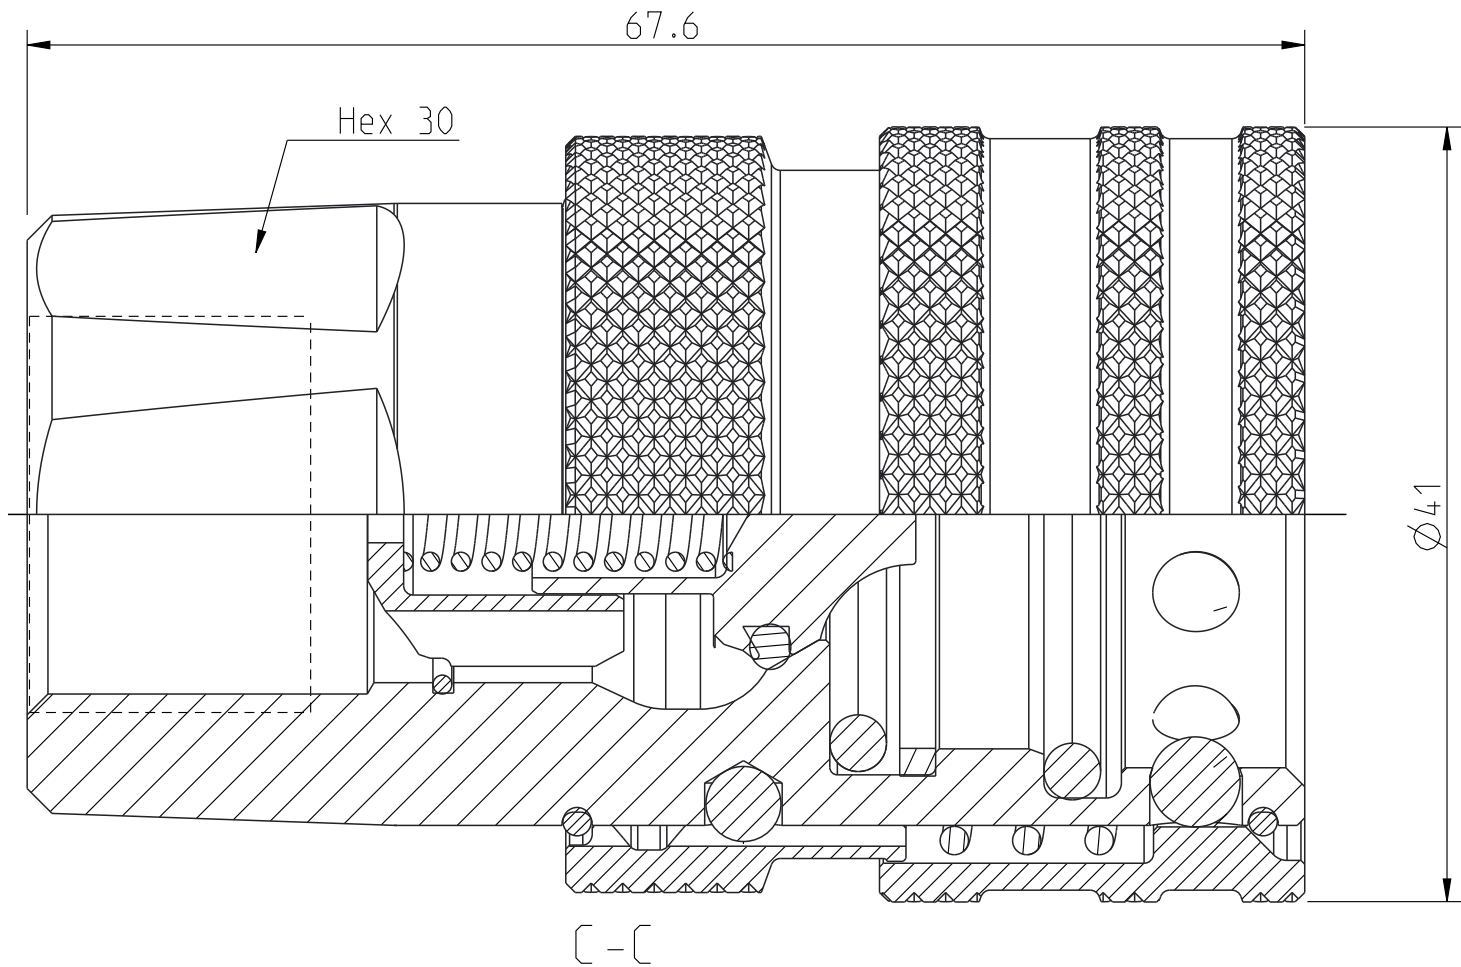

2:1

15	1	O-ring	FPM
14	2	Wire coil	Acid-proof steel
13	1	O-ring	FPM
12	1	Body	Stainless steel
11	1	Valve stop	Stainless steel
10	1	Locking ring	Stainless steel
9	1	Spring	Stainless steel
8	1	Spring	Stainless steel
7	1	Wire coil	Stainless steel
6	1	Locking sleeve	Stainless steel
5	1	Back-up ring	PTFE
4	10	Ball	Stainless steel
3	1	O-ring	FPM
2	1	Ball	Acid proof steel
1	1	Valve	Stainless steel
Detalj Item	Antal Quant.	Benämning Description	Material Material



Skala Scale	5:2	Ritad Drawn	ABJOER	Kontr. Checked	-	Godk. Appr.	-	Äm nr. Alt. no.	-	Dat. Date	13-01-18
Assembly drawing								Ritning nr./Drawing No.		Utg./Issue	
								50_526_1215		AB	