
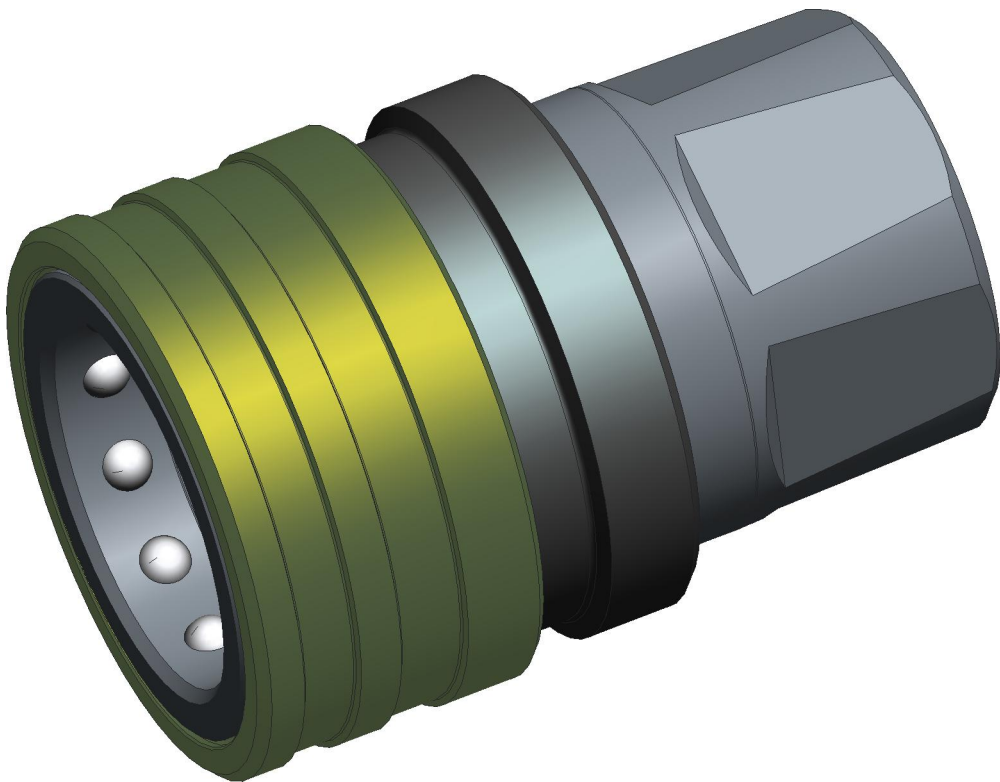


Product no: 10_526_1217		
Max working pressure:	250	bar connected
	200	bar disconnected
Min burst pressure:	1000	bar connected
	800	bar disconnected
Sealing material:	FPM	
Temperatur range:	-20��C - +205 ��C	
Nominal flow diameter,DN:	20	mm
Connection	G 3/4" Fem	
Connection stroke:	-	mm

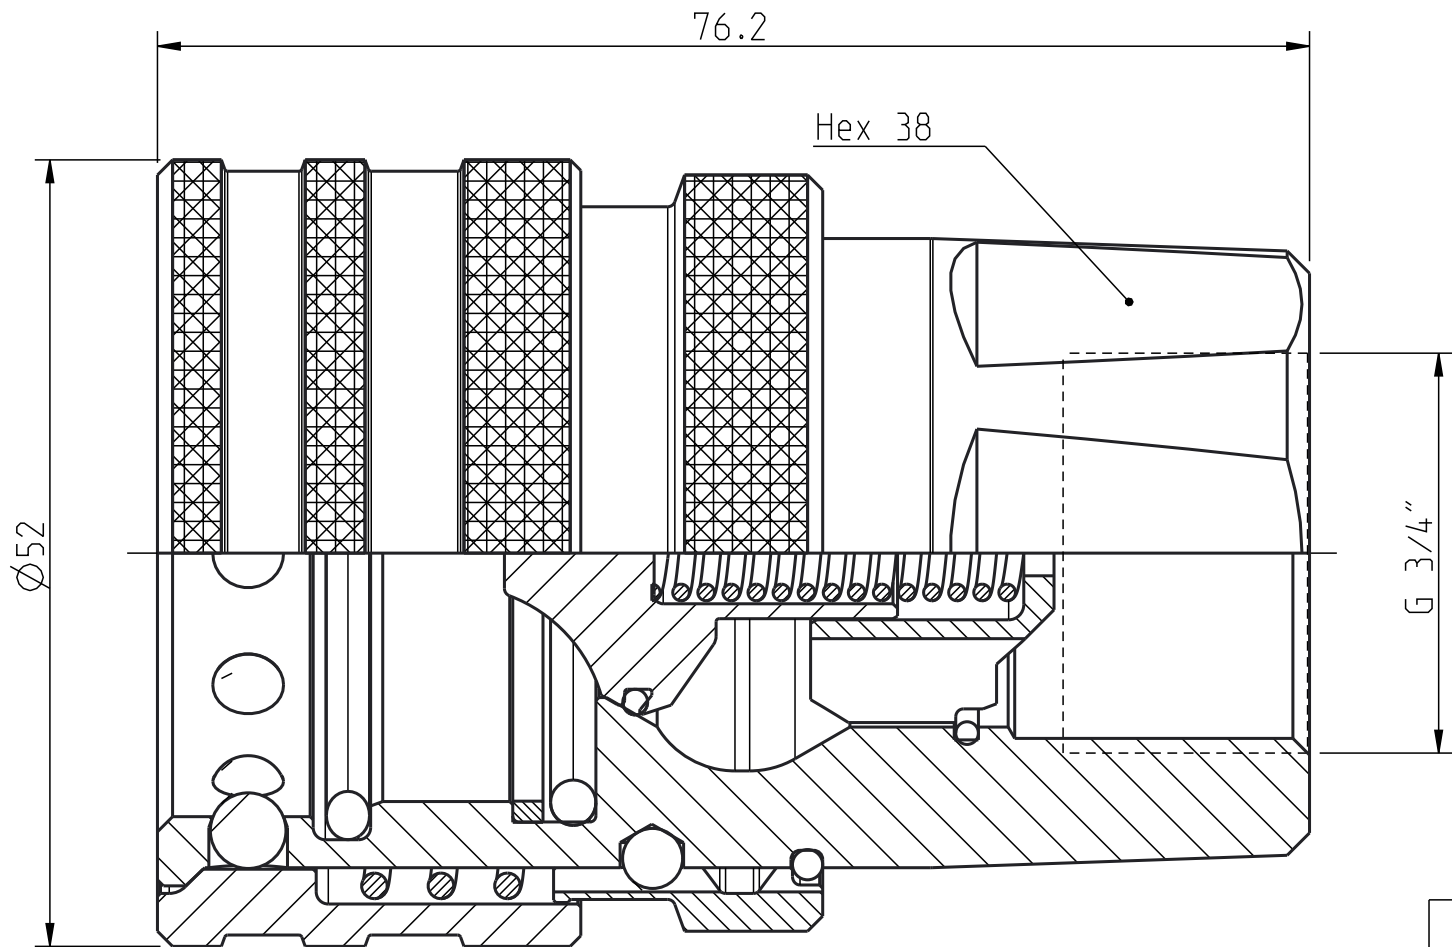

3:2

15	1	Wire coil	Steel
14	1	Wire coil	Steel
13	1	Valve stop	Stainless steel
12	1	Valve	Stainless steel
11	1	Spring	Stainless steel
10	1	Spring	Stainless steel
9	1	O-ring	FPM
8	1	O-ring	FPM
7	1	O-ring	FPM
6	1	Locking sleeve	Stainless steel
5	1	Locking ring	Stainless steel
4	1	Body	Stainless steel
3	12	Ball	Stainless steel
2	1	Ball	Acid proof steel
1	1	Back-up ring	PTFE
Detalj Item	Antal Quant.	Ben��mning Description	Material Material

09_526_2631
09_526_2630
09_526_3930
08_526_3030
09_526_3230
09_526_3130
09_525_2819
09_525_2818
09_514_2814
09_526_2530
09_526_3330
09_526_5327
09_215_4800
09_115_4801
09_525_5603

	Skala Scale	2:1	Ritad Drawn	JoEr	Kontr. Checked	-	Godk. Appr.	-	AM nr. Alt. no.	-	Dat. Date	130118
	Assembly drawing							Ritning nr/Drawing No.			Utg./Issue	
							50_526_1217			AC		