
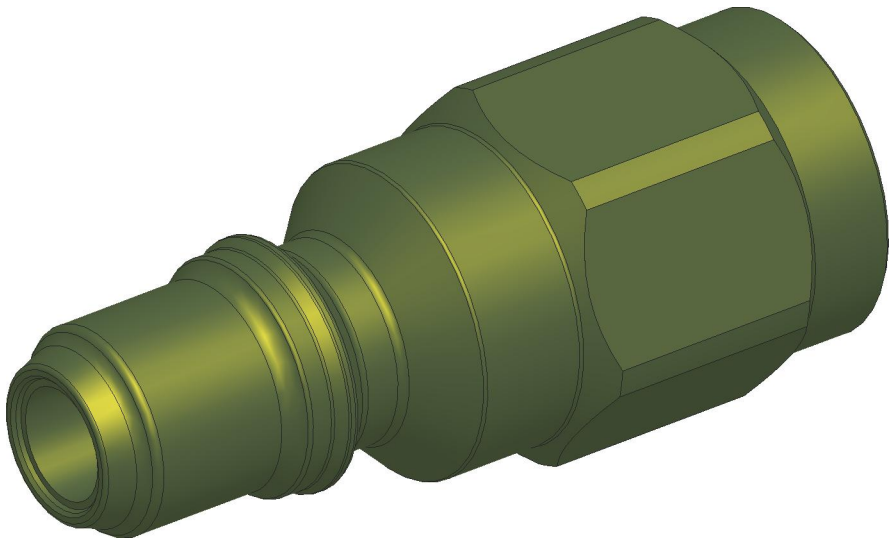


Dessa r  tigheter f  rbeh  lls.
All rights reserved.
Alle rechte vorbehalten.

Diese Zeichnung darf weder ganz noch teilweise ohne unsere ausdr  ckliche Genehmigung kopiert oder auf andere Weise verv  ltlicht werden.
werden. Zuwiderhandlungen werden gerichtlich verfolgt.

Denna handling f  r ej utan v  t medgivande delges annan. Kopieras eller eljest obeh  rigen anv  ndas.
  vertr  delse h  rvid beivras med st  d av g  llande lag.
This document must not be copied, either completely or in part, without permission.
Any infringement will have legal consequences.

Product no: 10_526_6212		
Max working pressure:	250	bar connected
	250	bar disconnected
Min burst pressure:	1000	bar connected
	1000	bar disconnected
Sealing material:	FPM	
Temperatur range:	-20��C - +205 ��C	
Nominal flow diameter,DN:	6.3	mm
Connection	G 1/4'' Fem	
Connection stroke:	-	mm

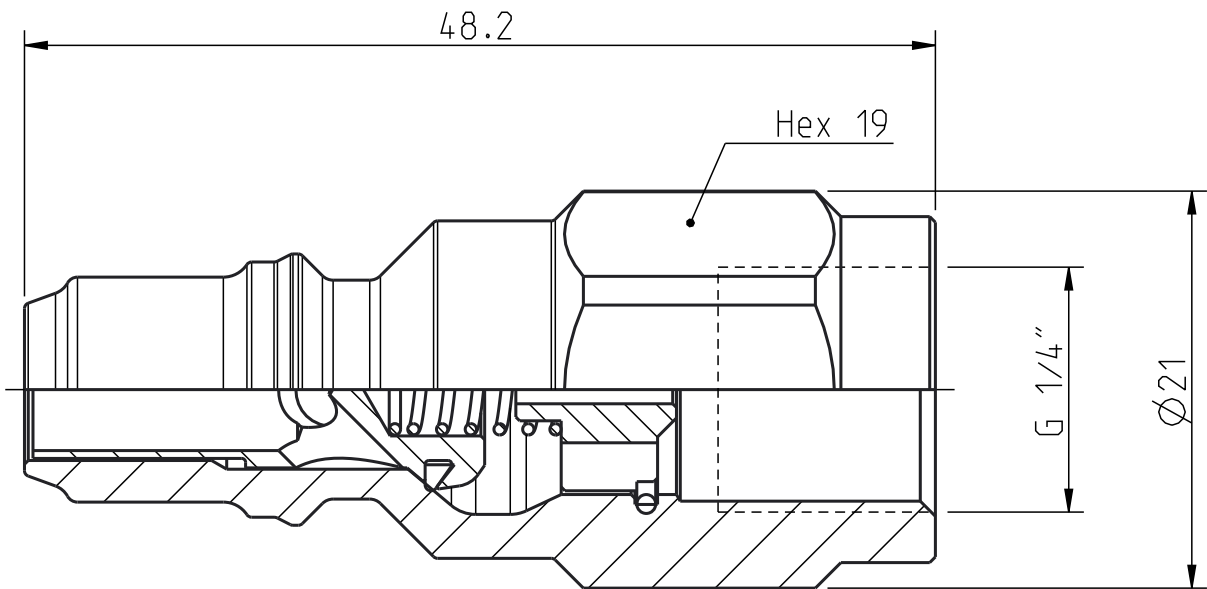

6	1	Wire coil	Steel
5	1	Valve stop	Stainless steel
4	1	Valve	Stainless steel
3	1	Spring	Stainless steel
2	1	O-ring	FPM
1	1	Nipple body	Stainless steel
Detalj Item	Antal Quant.	Ben��mning Description	Material Material

	Skala Scale	5:2	Rit��d Drawn	CABJOER	Kontr. Checked	-	Godk. Appr.	-	��m nr. Alt. no.	-	Dat. Date	12-04-02
	Assembly drawing		Ritning nr/Drawing No.				50_526_6212		Utg./Issue			AB