


This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



A3

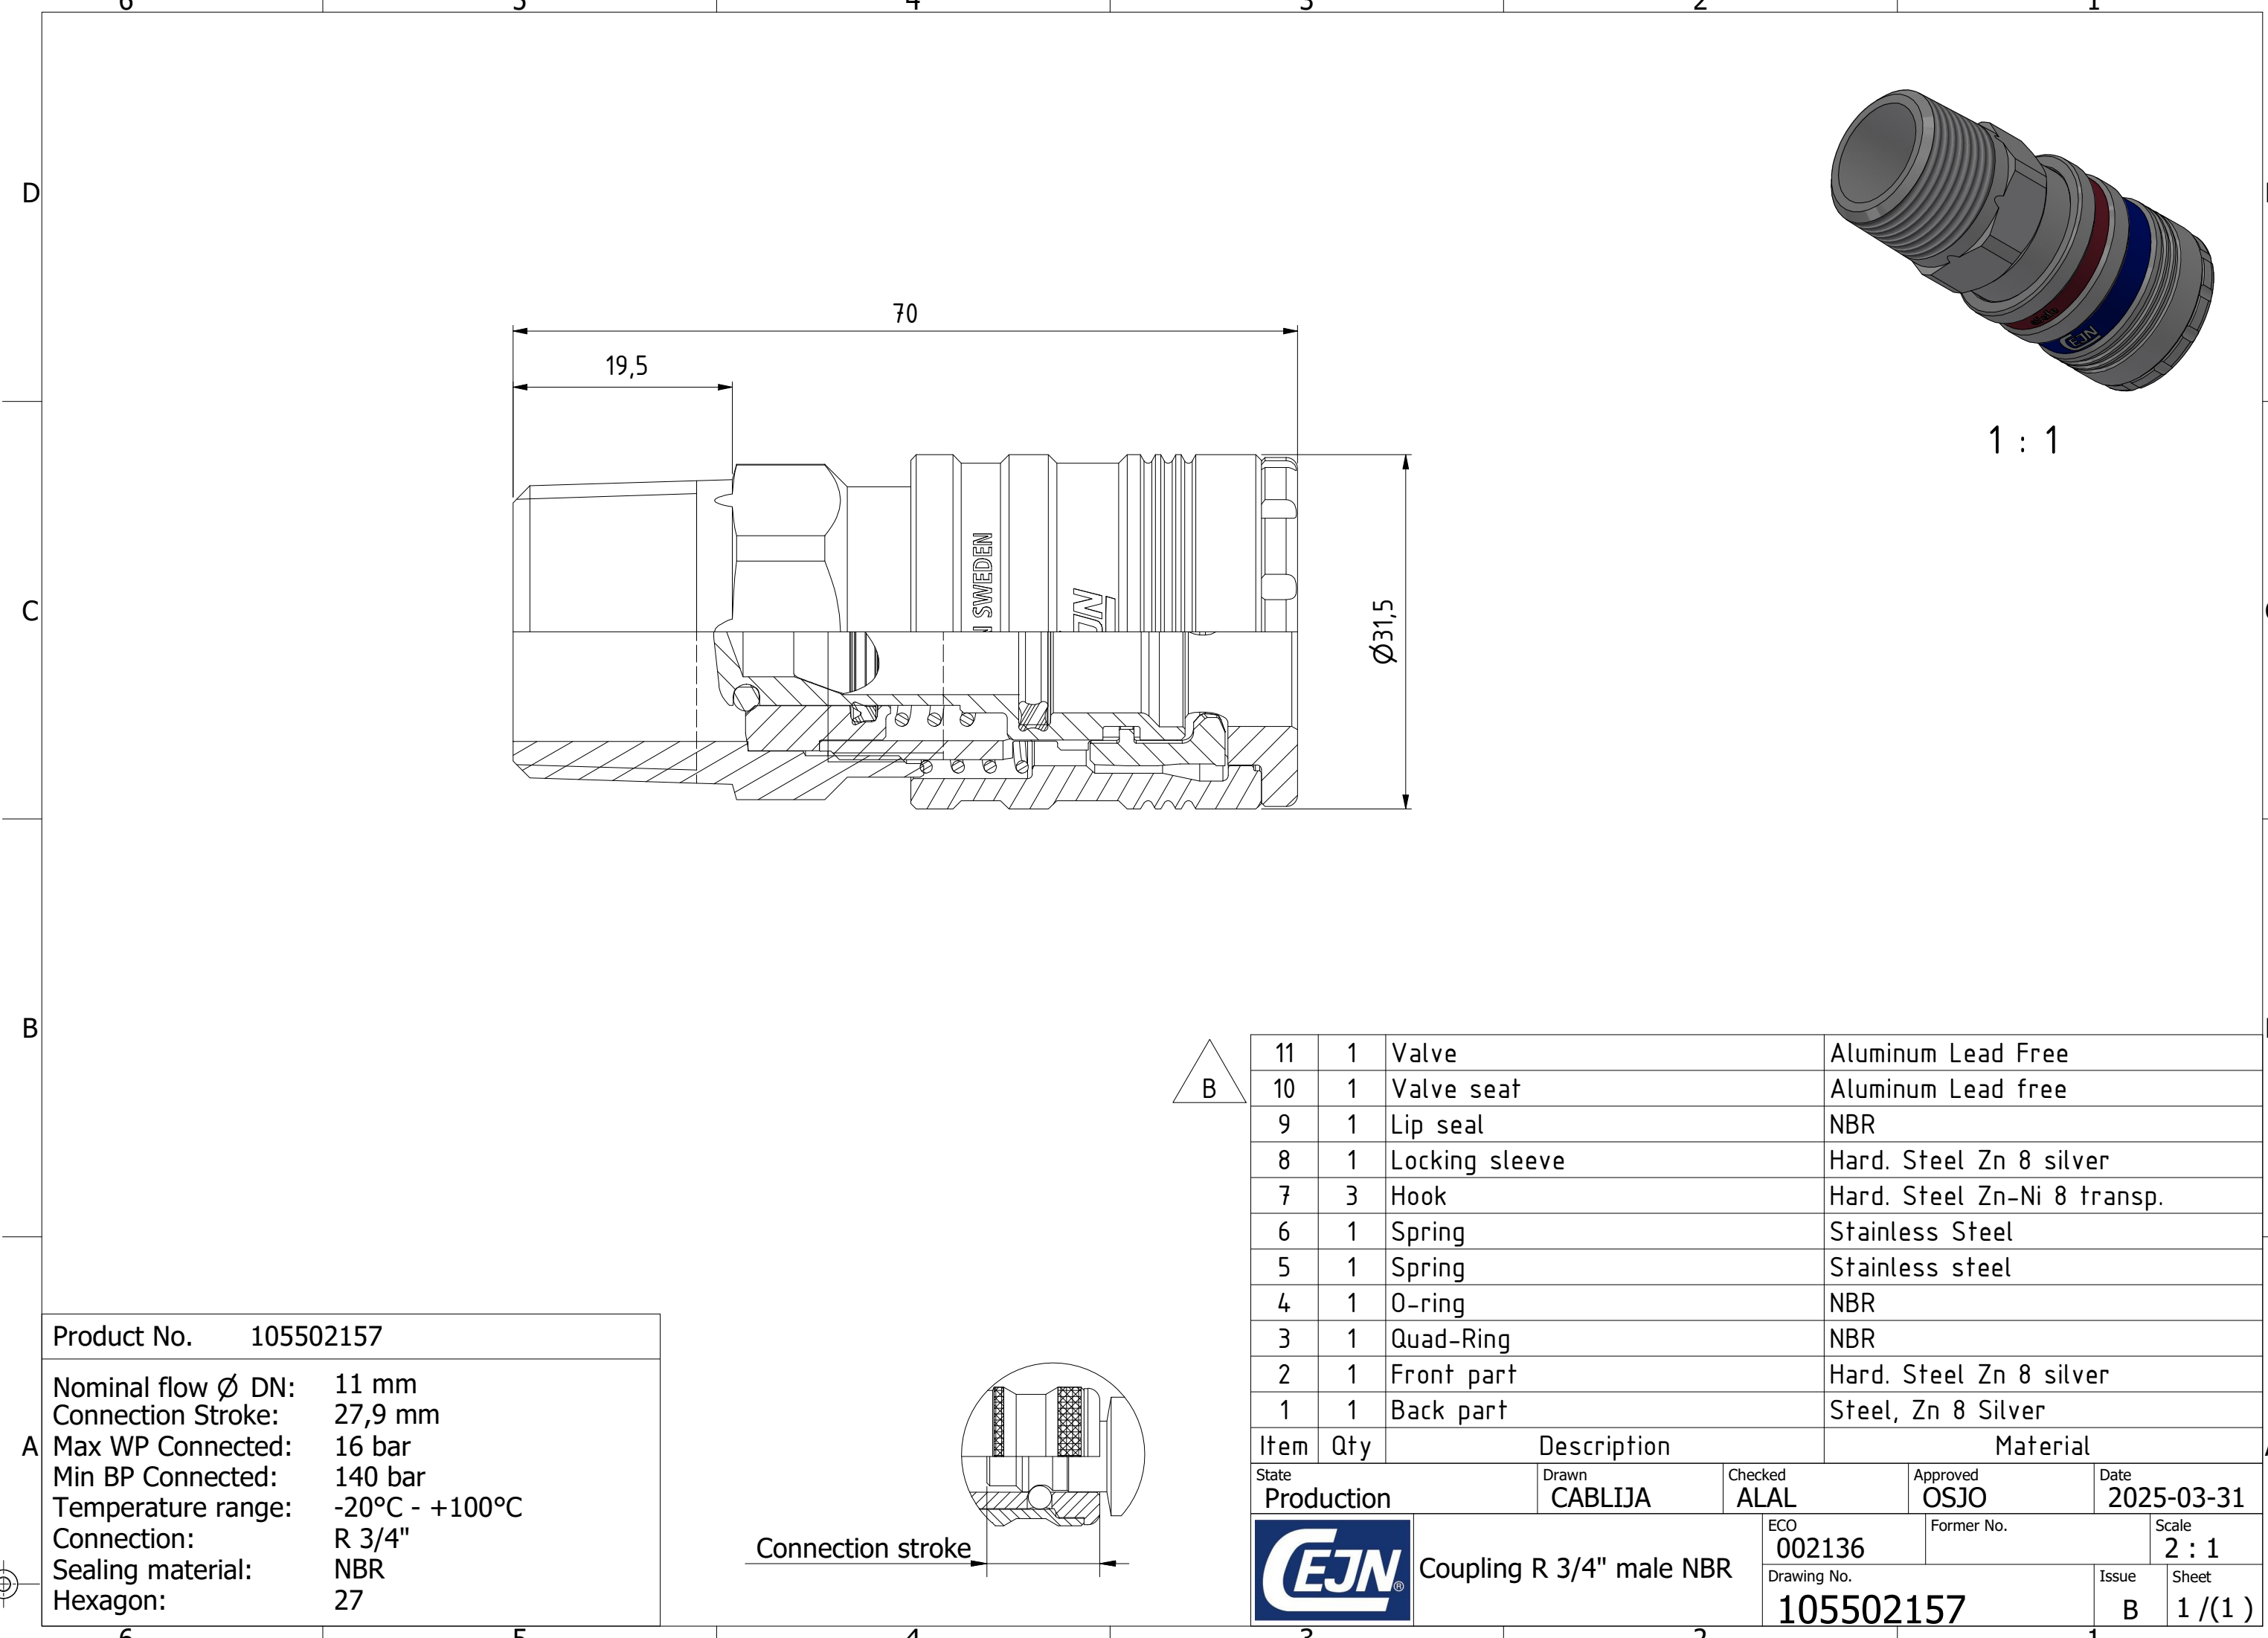

A

B

C

D

A

B


C

D



11	1	Valve	Aluminum Lead Free
10	1	Valve seat	Aluminum Lead free
9	1	Lip seal	NBR
8	1	Locking sleeve	Hard. Steel Zn 8 silver
7	3	Hook	Hard. Steel Zn-Ni 8 transp.
6	1	Spring	Stainless Steel
5	1	Spring	Stainless steel
4	1	O-ring	NBR
3	1	Quad-Ring	NBR
2	1	Front part	Hard. Steel Zn 8 silver
1	1	Back part	Steel, Zn 8 Silver
Item	Qty	Description	Material
State		Drawn	Checked
Production		CABLIJA	ALAL
		Approved	Date
		OSJO	2025-03-31
		ECO	Scale
		002136	2 : 1
		Former No.	
		Drawing No.	Issue
		105502157	B
			Sheet
			1 /(1)

Product No. 105502157	
Nominal flow Ø DN:	11 mm
Connection Stroke:	27,9 mm
Max WP Connected:	16 bar
Min BP Connected:	140 bar
Temperature range:	-20°C - +100°C
Connection:	R 3/4"
Sealing material:	NBR
Hexagon:	27

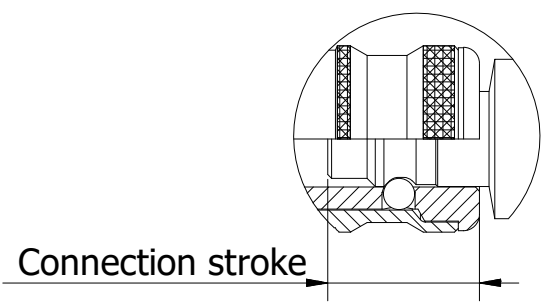

Connection stroke



Coupling R 3/4" male NBR

ECO

002136

Former No.

Issue

B

Scale

2 : 1

Sheet

1 /(1)