

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



A3



D

C


B

A

Product No. 105502204	
Nominal flow Ø DN:	11 mm
Connection Stroke:	27,9 mm
Max WP Connected:	16 bar
Min BP Connected:	140 bar
Temperature range:	-20°C - +100°C
Connection:	G 3/8"
Sealing material:	NBR
Hexagon:	26

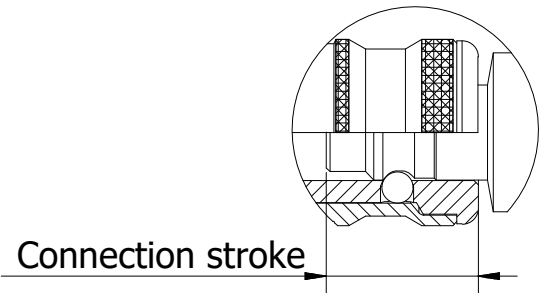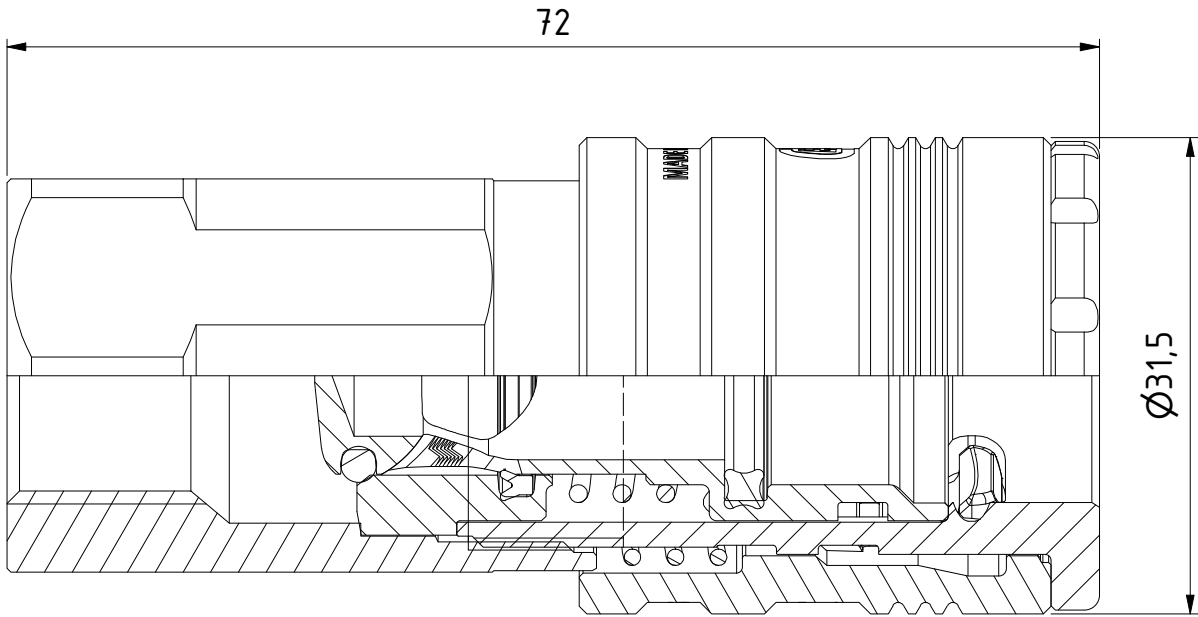


Connection stroke



11	1	Valve	Aluminum Lead Free
10	1	Valve seat	Aluminum Lead free
9	1	Lip seal	NBR
8	1	Locking sleeve	Hard. Steel Zn 8 silver
7	3	Hook	Hard. Steel Zn-Ni 8 transp.
6	1	Spring	Stainless Steel
5	1	Spring	Stainless steel
4	1	O-ring	NBR
3	1	Quad-Ring	NBR
2	1	Front part	Hard. Steel Zn 8 silver
1	1	Back part	Steel, Zn 8 Silver

Item	Qty	Description			Material			
State Production		Drawn CABLIJA	Checked ALAL		Approved OSJO	Date 2025-03-31		
		Coupling G 3/8" fem NBR			ECO 002136		Former No.	Scale 2 : 1
					Drawing No. 105502204		Issue B	Sheet 1 /(1)

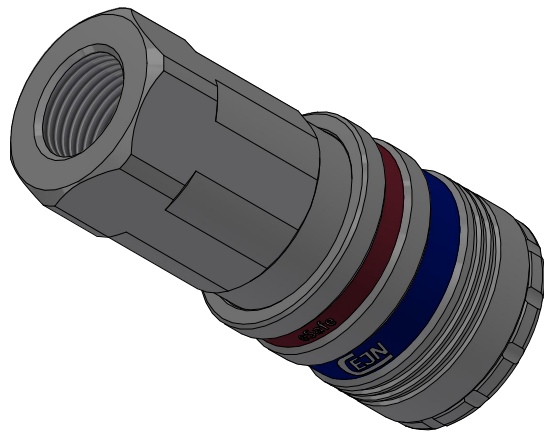

1 : 1

D

C

B

A