

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



A3




D

C

B


A

Product No. 105502404	
Nominal flow Ø DN:	11 mm
Connection Stroke:	27,9 mm
Max WP Connected:	16 bar
Min BP Connected:	140 bar
Temperature range:	-20°C - +100°C
Connection:	3/8" NPT
Sealing material:	NBR
Hexagon:	26

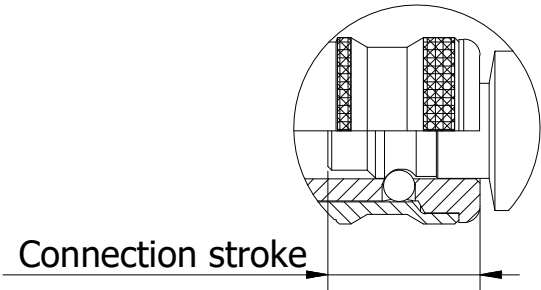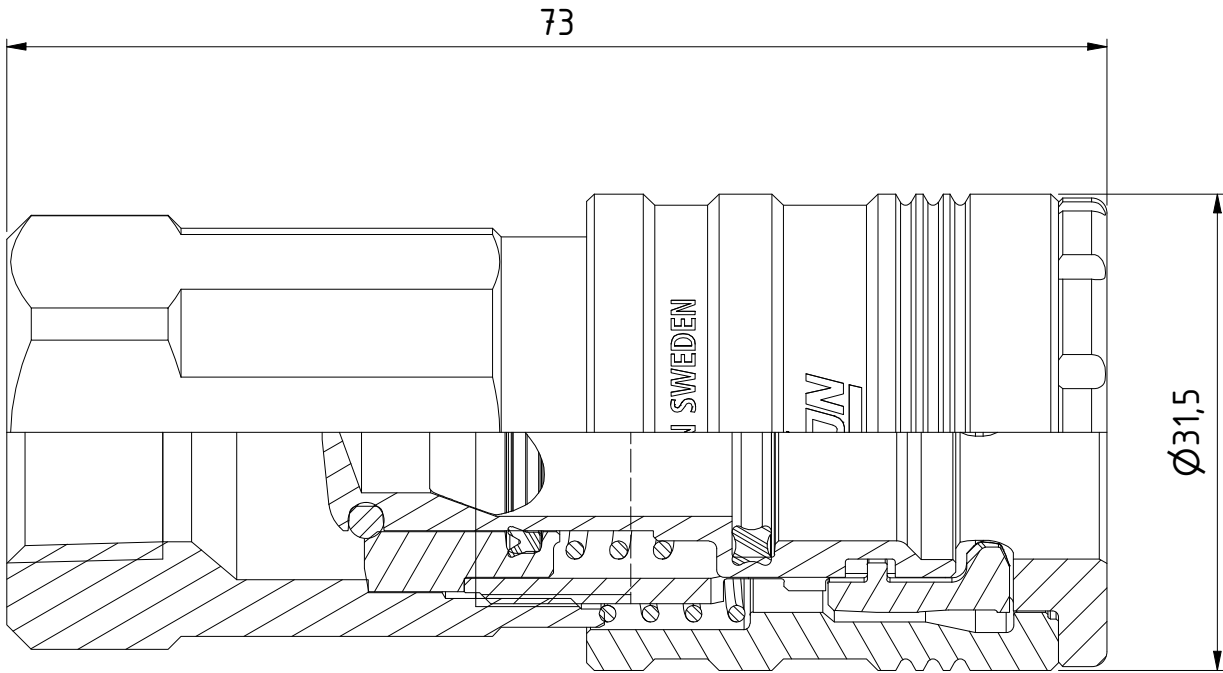

11	1	Valve	Aluminum Lead Free
10	1	Valve seat	Aluminum Lead free
9	1	Lip seal	NBR
8	1	Locking sleeve	Hard. Steel Zn 8 silver
7	3	Hook	Hard. Steel Zn-Ni 8 transp.
6	1	Spring	Stainless Steel
5	1	Spring	Stainless steel
4	1	O-ring	NBR
3	1	Quad-Ring	NBR
2	1	Front part	Hard. Steel Zn 8 silver
1	1	Back part	Steel, Zn 8 Silver

Item	Qty	Description			Material				
State Production		Drawn CABLIJA	Checked ALAL		Approved OSJO	Date 2025-04-10			
 Coupling 3/8" NPT fem NBR			ECO 002136		Former No.		Scale 2 : 1		
			Drawing No. 105502404					Issue B	Sheet 1 /(1)

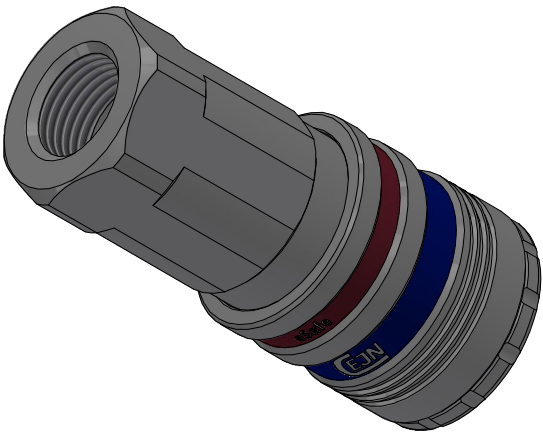

1 : 1

D

C

B

A