

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



A3

D

C

B


A

D



C

B

A

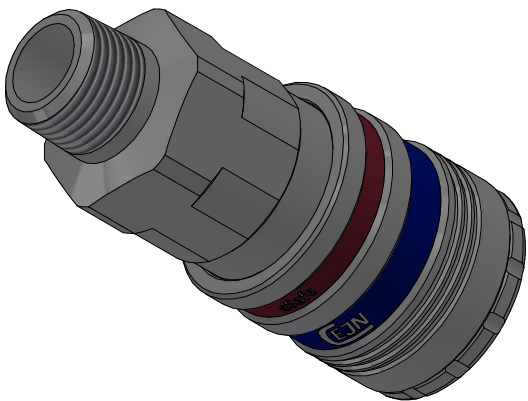


1 : 1

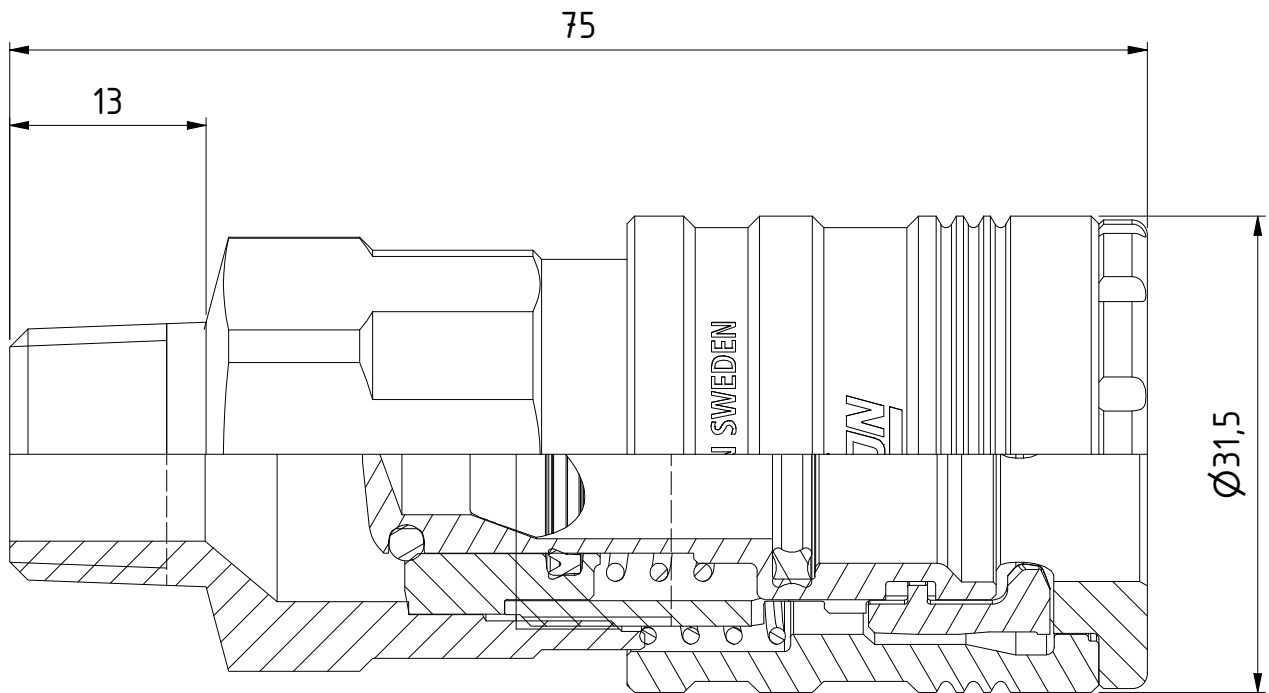

11	1	Valve	Aluminum Lead Free
10	1	Valve seat	Aluminum Lead free
9	1	Lip seal	NBR
8	1	Locking sleeve	Hard. Steel Zn 8 silver
7	3	Hook	Hard. Steel Zn-Ni 8 transp.
6	1	Spring	Stainless Steel
5	1	Spring	Stainless steel
4	1	O-ring	NBR
3	1	Quad-Ring	NBR
2	1	Front part	Hard. Steel Zn 8 silver
1	1	Back part	Steel, Zn 8 Silver

Item	Qty	Description	Material
State		Drawn	Checked
Production		CABLIJA	ALAL
Approved		OSJO	Date
			2025-04-10
ECO		Former No.	Scale
002136			2 : 1
Drawing No.		Issue	Sheet
105502454		B	1 /(1)

Product No.	105502454
Nominal flow Ø DN:	11 mm
Connection Stroke:	27,9 mm
Max WP Connected:	16 bar
Min BP Connected:	140 bar
Temperature range:	-20°C - +100°C
Connection:	3/8" NPT
Sealing material:	NBR
Hexagon:	26

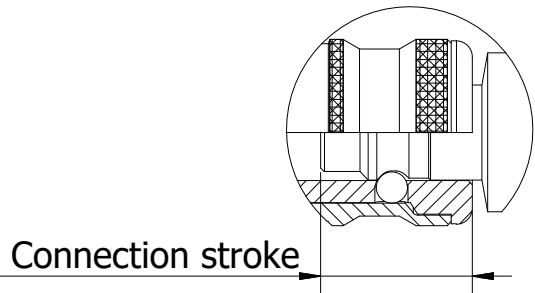

Connection stroke



Coupling 3/8" NPT male
NBR

002136

Drawing No.

105502454

Former No.

Issue

B

Scale

Sheet

1 /(1)