

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



A3

D

C

B


A

D



C

B

A

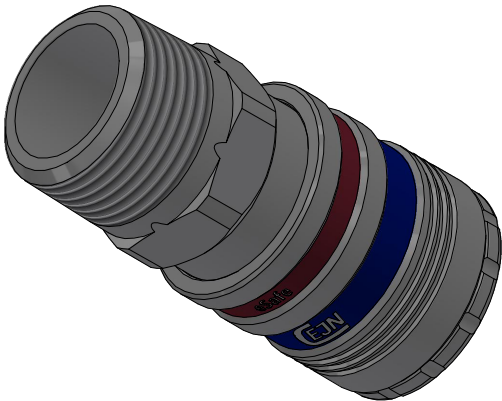


1 : 1

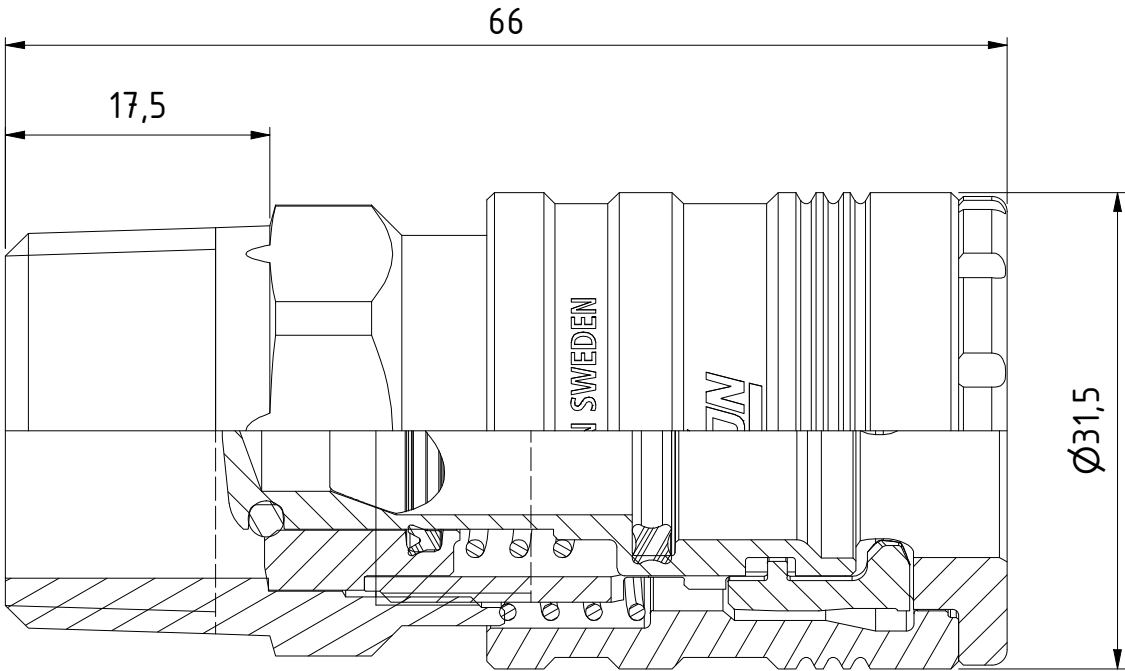

11	1	Valve	Aluminum Lead Free
10	1	Valve seat	Aluminum Lead free
9	1	Lip seal	NBR
8	1	Locking sleeve	Hard. Steel Zn 8 silver
7	3	Hook	Hard. Steel Zn-Ni 8 transp.
6	1	Spring	Stainless Steel
5	1	Spring	Stainless steel
4	1	O-ring	NBR
3	1	Quad-Ring	NBR
2	1	Front part	Hard. Steel Zn 8 silver
1	1	Back part	Steel, Zn 8 Silver

Item	Qty	Description	Material
State		Drawn	Checked
Production		CABLIJA	ALAL
Approved		OSJO	Date
			2025-03-31
ECO		Former No.	Scale
002136			2 : 1
Drawing No.		Issue	Sheet
105502457		B	1 /(1)



Connection stroke

Product No. 105502457

Nominal flow Ø DN: 11 mm
Connection Stroke: 27,9 mm
Max WP Connected: 16 bar
Min BP Connected: 140 bar
Temperature range: -20°C - +100°C
Connection: 3/4" NPT
Sealing material: NBR
Hexagon: 27

CEJN Coupling 3/4" NPT male
NBR