
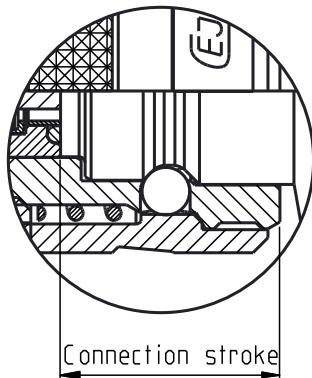


Product no: 10_565_1285		
Max working pressure:	400	bar connected
	400	bar disconnected
Min burst pressure:	1200	bar connected
	1200	bar disconnected
Sealing material:	NBR	
Temperatur range:	-30��C - 100 ��C	
Nominal flow diameter,DN:	12.5	mm
Connection	G 1/2'' Fem	
Connection stroke:	16.9	mm

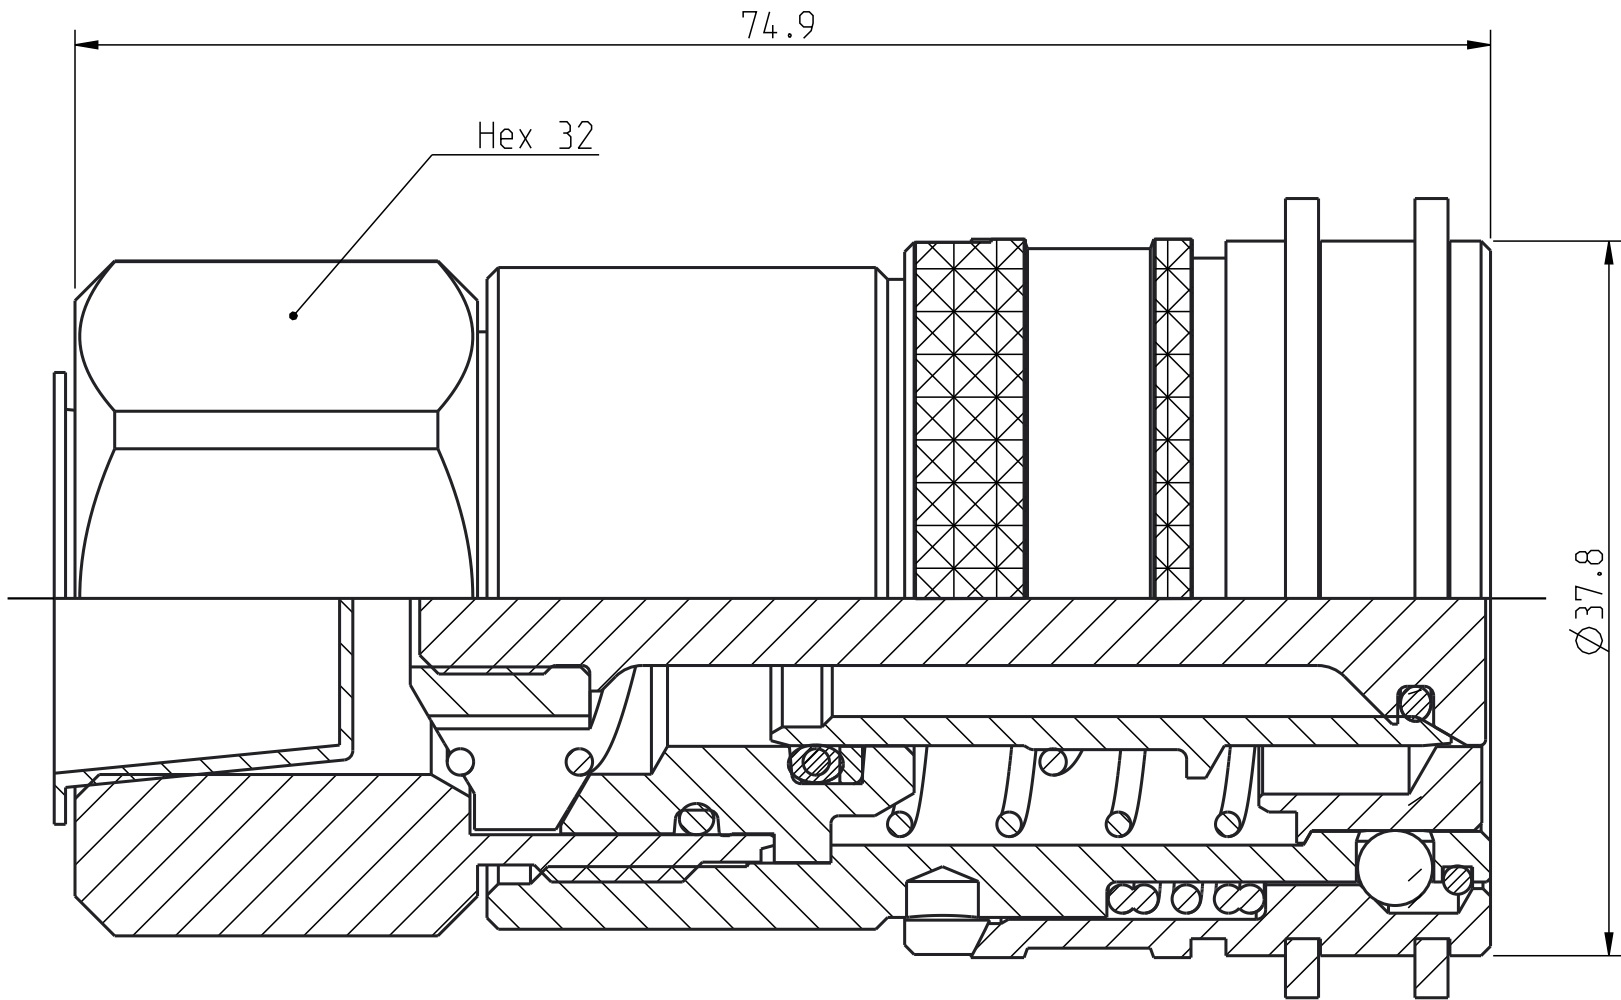

1:1

19	1	Wire coil	Stainless steel
18	1	Valve stop	Steel, Plated
17	1	Valve sleeve	Steel, Plated
16	1	Valve seat	Steel, Plated
15	1	Valve opener	Steel, Plated
14	1	Thread protection	Plastic
13	1	Spring	Stainless steel
12	1	Spring	Stainless steel
11	1	Spring	Stainless steel
10	1	Ratchet sleeve	Steel, Zn-Ni 9 transp
9	1	O-ring	NBR
8	1	O-ring	NBR
7	1	O-ring	NBR
6	1	Locking sleeve	Steel, Zn-Ni 10 black
5	2	Lock ring	Spring steel
4	1	Front part	Steel, Zn-Ni 9 transp
3	15	Ball	Stainless steel
2	1	Backup ring	Plastic
1	1	Back part	Steel, Zn-Ni 9 transp
Detalj Item	Antal Quant.	Ben��mning Description	Material Material

	Skala Scale	5:2	Rit��d Drawn	CABMBA	Kontr. Checked	PeOd	Godk. Appr.	PMB	��m nr. Alt. no.	-	Dat. Date	14-02-03
	Assembly drawing		Ritning nr./Drawing No.				50_565_1285		Utg./Issue			AA