
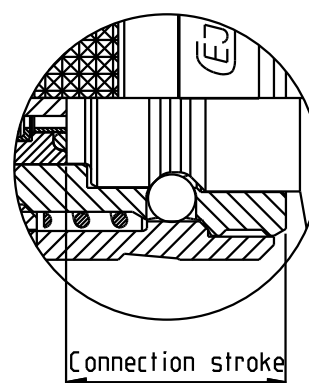


Alla rättigheter förbehålls.
 All rights reserved.
 Alle Rechte vorbehalten.
 Diese Zeichnung darf weder ganz noch teilweise ohne unsere ausdrückliche Genehmigung kopiert oder auf andere Weise vervielfältigt werden.
 werden. Zuwiderhandlungen werden gerichtlich verfolgt.
 This document must not be copied, either completely or in part, without permission.
 Any infringement will have legal consequences.
 Detta teckning är ej till ändamål eller annan laglig eller olaglig användning.
 Överträdelse härrid beivras med stöd av gällande lag.
 This document must not be copied, either completely or in part, without permission.
 Any infringement will have legal consequences.

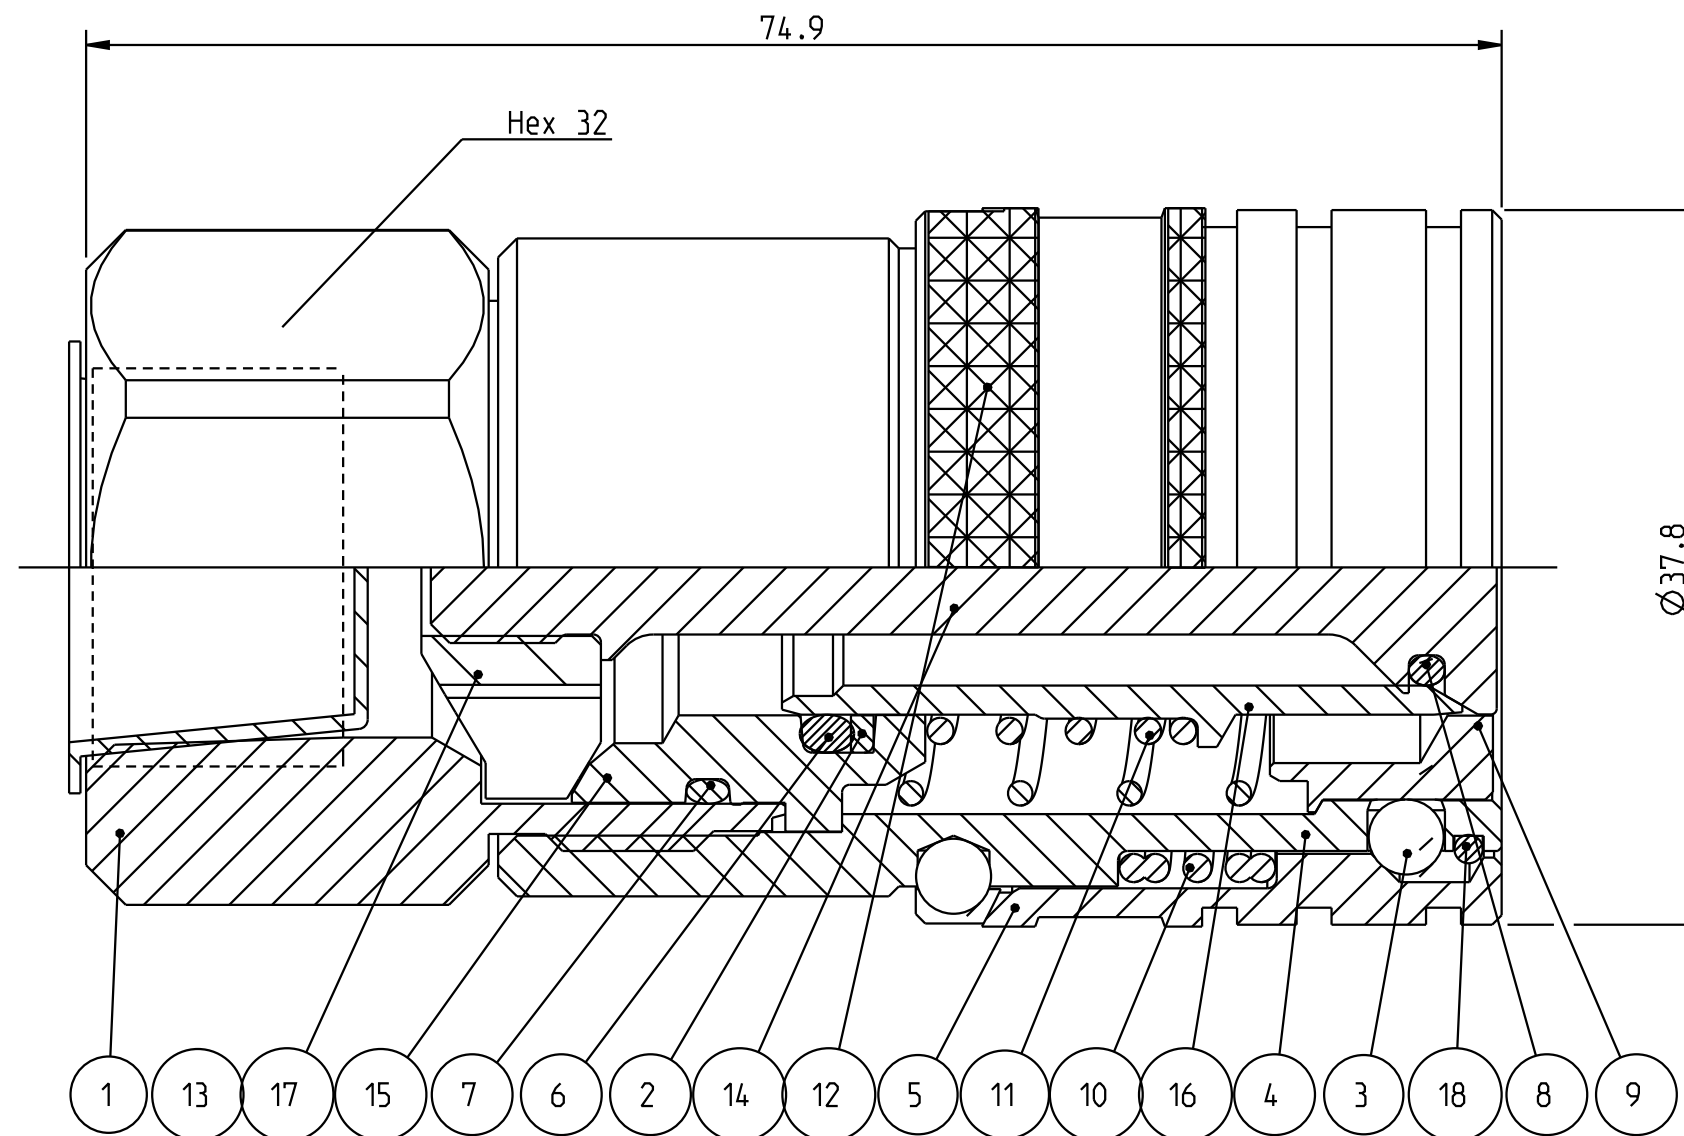

Product no: 10_565_1405

Max working pressure, static: 400 bar
 Max working pressure, dynamic: 250 bar
 Min burst pressure: 1200 bar connected
 1200 bar disconnected
 Sealing material: NBR
 Temperatur range: -30°C - +100 °C
 Nominal flow diameter, DN: 12.5 mm
 Connection: 1/2" NPT Fem
 Connection stroke: 16.9 mm

18	1	Wire coil	Stainless steel
17	1	Valve stop	Steel, Plated
16	1	Valve sleeve	Steel, Plated
15	1	Valve seat	Steel, Plated
14	1	Valve opener	Steel, Plated
13	1	Thread protection	Plastic
12	1	Spring	Stainless steel
11	1	Spring	Stainless steel
10	1	Spring	Stainless steel
9	1	Ratchet sleeve	Steel, Plated
8	1	O-ring	NBR
7	1	O-ring	NBR
6	1	O-ring	NBR
5	1	Locking sleeve	Steel, Plated
4	1	Front part	Steel, Zn 8 Silver
3	16	Ball	Stainless steel
2	1	Backup ring	Plastic
1	1	Back part	Steel, plated
Detalj Item	Antal Quant.	Benämning Description	Material Material

CEJN

Skala Scale	5:2	Ritad Drawn	MBR	Kontroll Checked	JE	Godk. Appr.	MAH	Äm nr. Att. no.	7431	Dat. Date	080514
Assembly drawing								Ritning nr/Drawing No.		Utg./Issue	
								50_565_1405		AB	