

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©





D

C

B

A

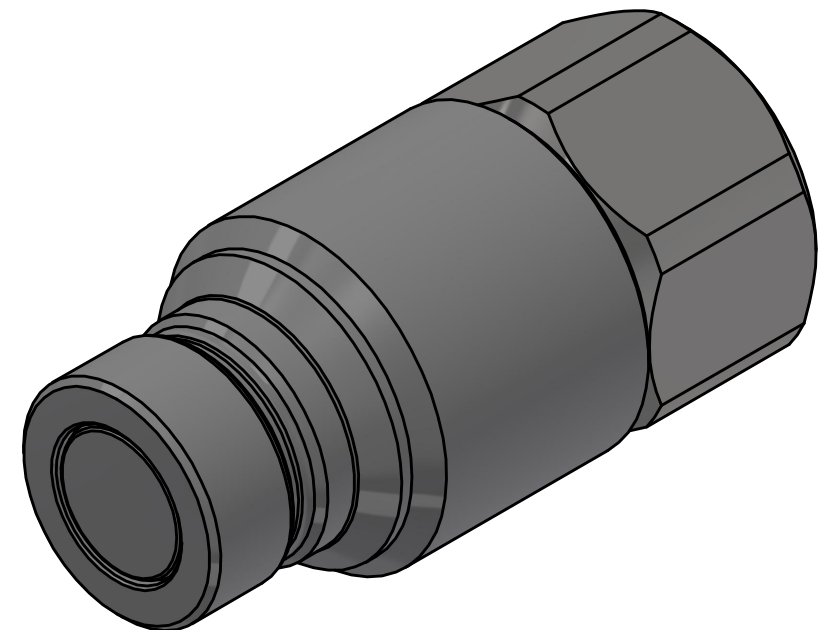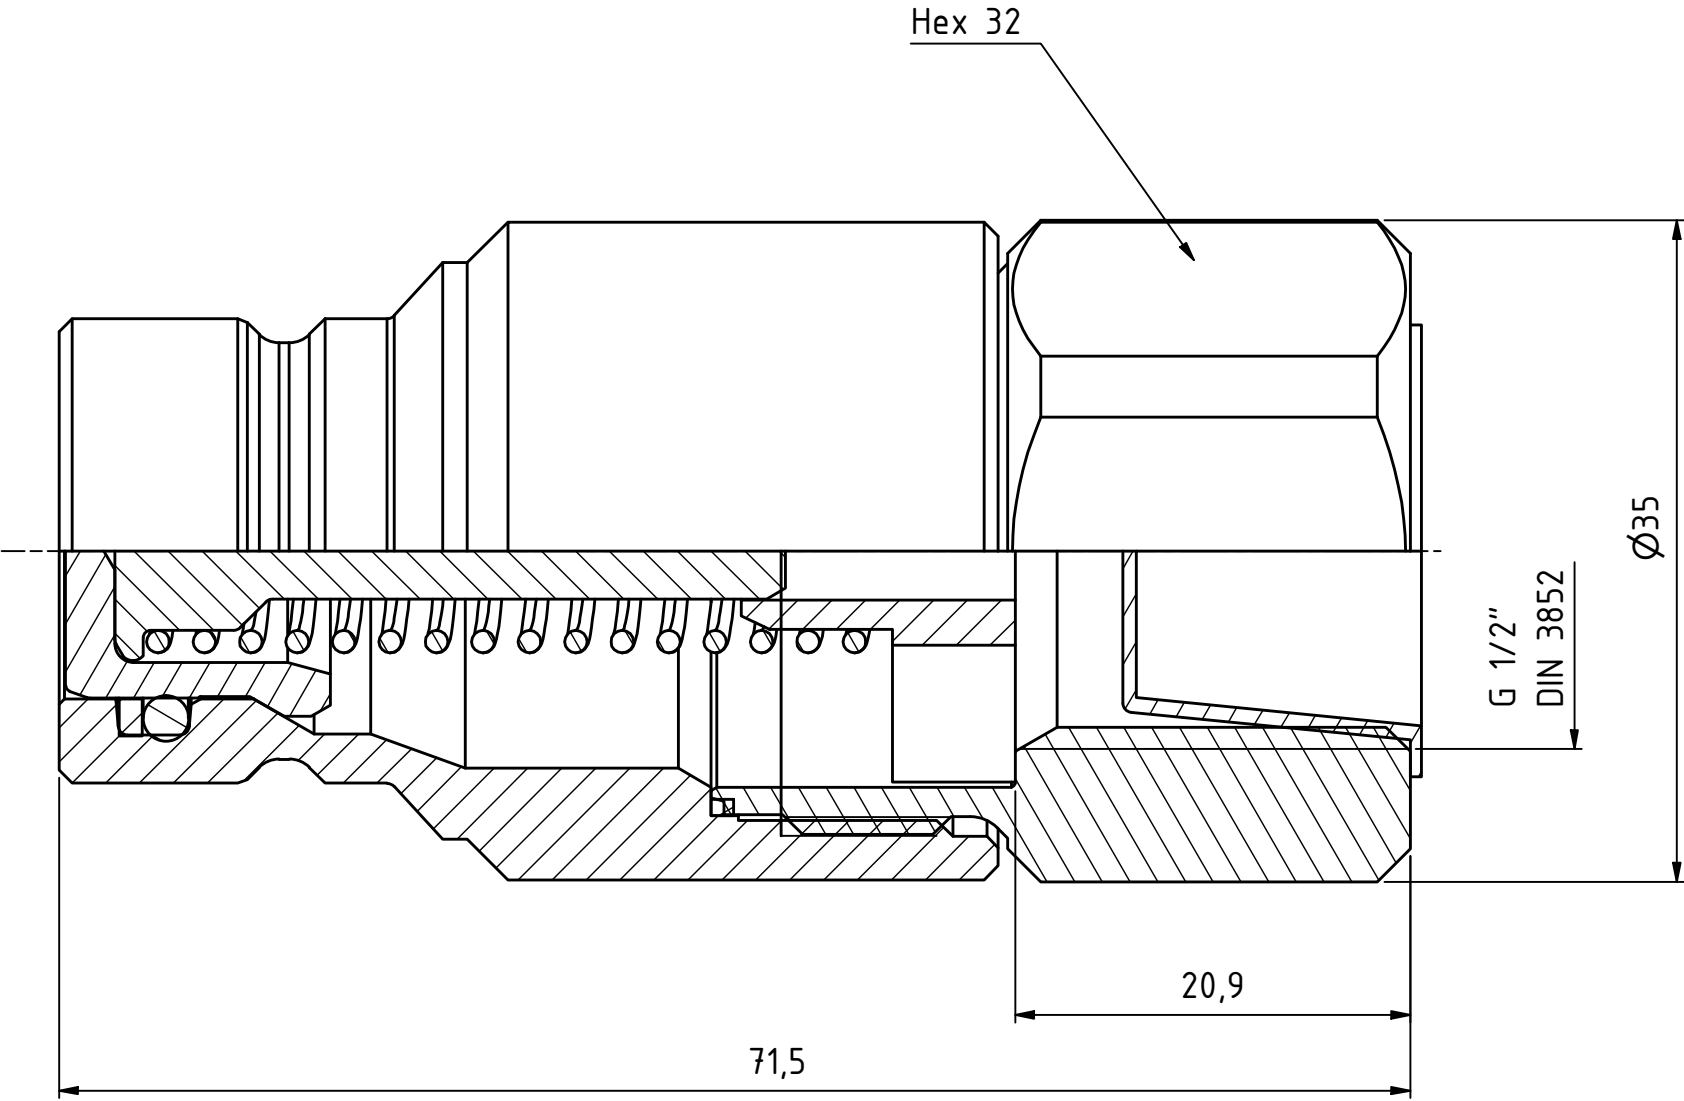

D

C

B

A

Product No. 105656215	
Nominal flow Ø DN:	12.5 mm
Connection Stroke:	- mm
Max WP Connected:	400 bar
Max WP Disconnected:	400 bar
Min BP Connected:	1200 bar
Min BP Disconnected:	1200 bar
Temperature range:	-20°C - +205°C
Connection:	G 1/2" Fem
Sealing material:	FPM

10	1	Pin	Steel	095654501
9	1	Nipple body	Hard. Steel, Zn-Ni	095652320
8	1	Backup ring	PTFE	095655601
7	1	O-ring	FPM	096042810
6	1	Flat seal	PTFE	095654601
5	1	Spring	Stainless steel	095653250
4	1	Thread protection	Plastic	099501363
3	1	Valve stop	Brass	095653950
2	1	Back part	Steel, Zn-Ni	095657328
1	1	Valve	Steel, Plated	095653050
Item	Qty	Description	Material	Part Number
		Scale 2,5 : 1	Drawn JOER	Checked
		Appr.		ECO 000969
		Date 2021-08-26		Issue B
		Sheet 1 /(1)		



Assembly Drawing 105656215