
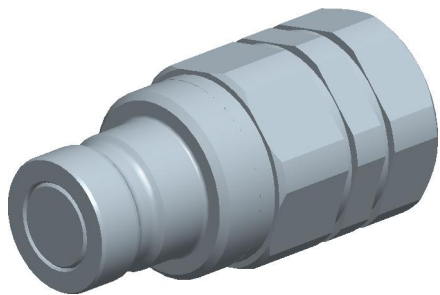


Alla rättigheter förbehålls.
 All rights reserved.
 Alle Rechte vorbehalten.

Diese Zeichnung darf weder ganz noch teilweise ohne unsere ausdrückliche Genehmigung kopiert oder auf andere Weise vervielfältigt werden.
 werden. Zuwiderhandlungen werden gerichtlich verfolgt.

Denna handling får ej utan vårt medgivande delges annan. Kopieras eller eljest obehörigen användas.
 Överlåtelse härvid beivras med stöd av gällande lag.
 This document must not be copied, either completely or in part, without permission.
 Any infringement will have legal consequences.

Product no: 10_567_6220		
Max working pressure:	20	bar connected
	20	bar disconnected
Min burst pressure:	80	bar connected
	80	bar disconnected
Sealing material:	EPDM	
Temperatur range:	-20°C - +150 °C	
Nominal flow diameter,DN:	9	mm
Connection	G 1/2" Female	
Connection stroke:	-	mm

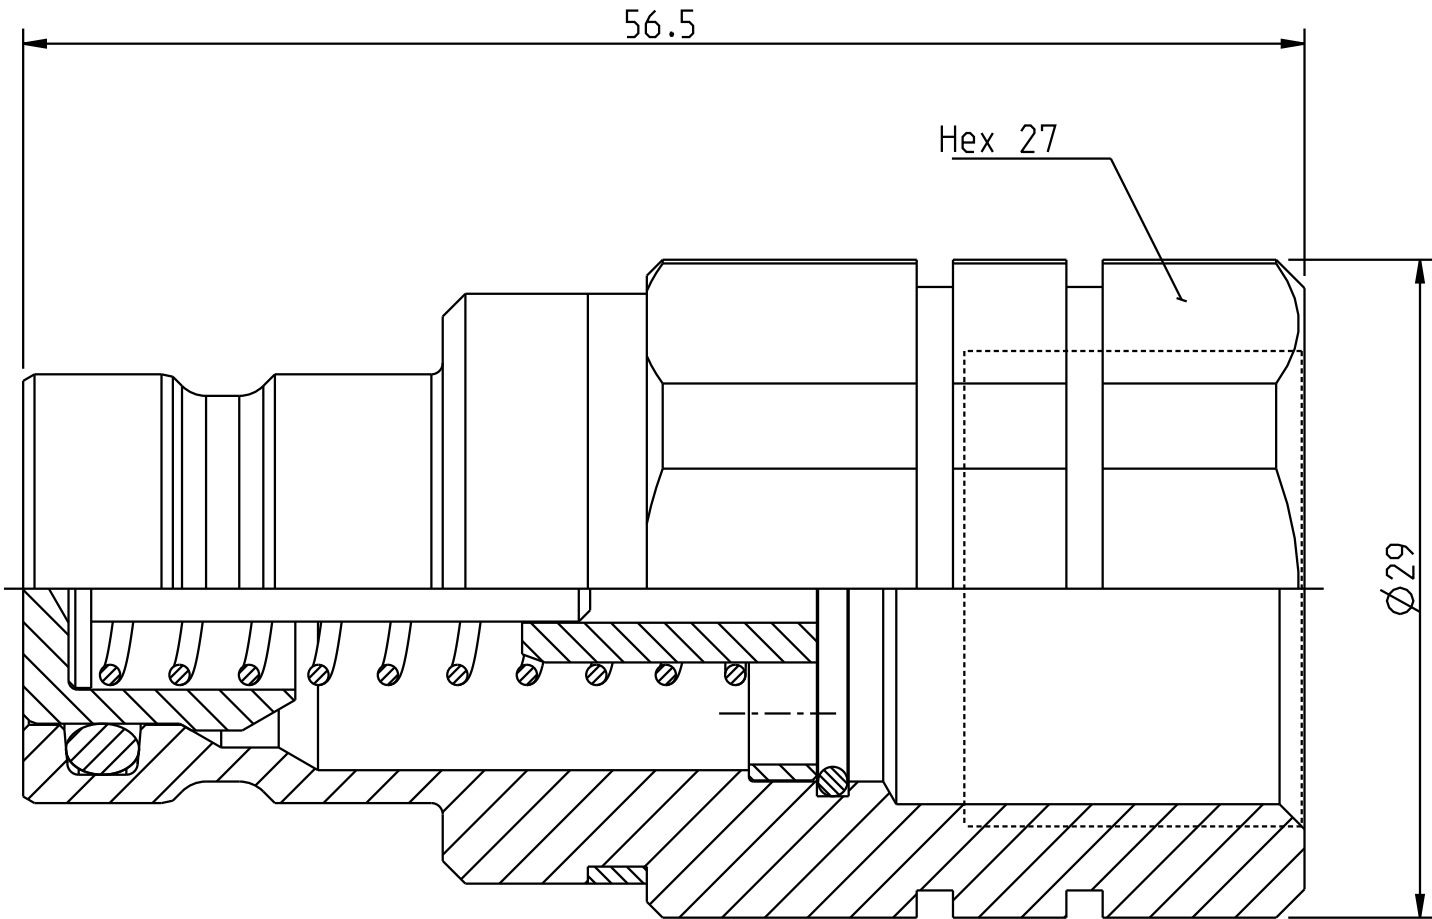

8	1	Pin	Brass, CuNi5b
7	1	Checking ring	Plastic
6	1	Stop for valve	Brass, CuNi5b
5	1	Spring	Acid-proof steel
4	1	Valve	Brass, CuNi5b
3	1	Wire coil	Acid-proof steel
2	1	Nipple body	Brass, CuNi5b
1	1	O-ring	EPDM
Detalj Item	Antal Quant.	Benämning Description	Material Material

	Skala Scale	3:1	Ritad Drawn	PGU	Kontroll Checked	-	Godk. Appr.	-	Äm nr. Alt. no.	-	Dat. Date	120217
	Assembly drawing		Ritning nr/Drawing No.				50_567_6220		Utg./Issue			AA