


Denna handling för ej utan vårt medgivande delges annan, kopieras eller eljest obehörigen användas.
Överträdelse härvid beivras med stöd av gällande lag.
Any infringement will have legal consequences.

Diese Zeichnung darf weder ganz noch teilweise ohne unsere ausdrückliche Genehmigung kopiert oder auf andere Weise vervielfältigt werden.
Alle r  tigheten f  rbeh  lls.
All rights reserved.
Alle rechte vorbehalten.

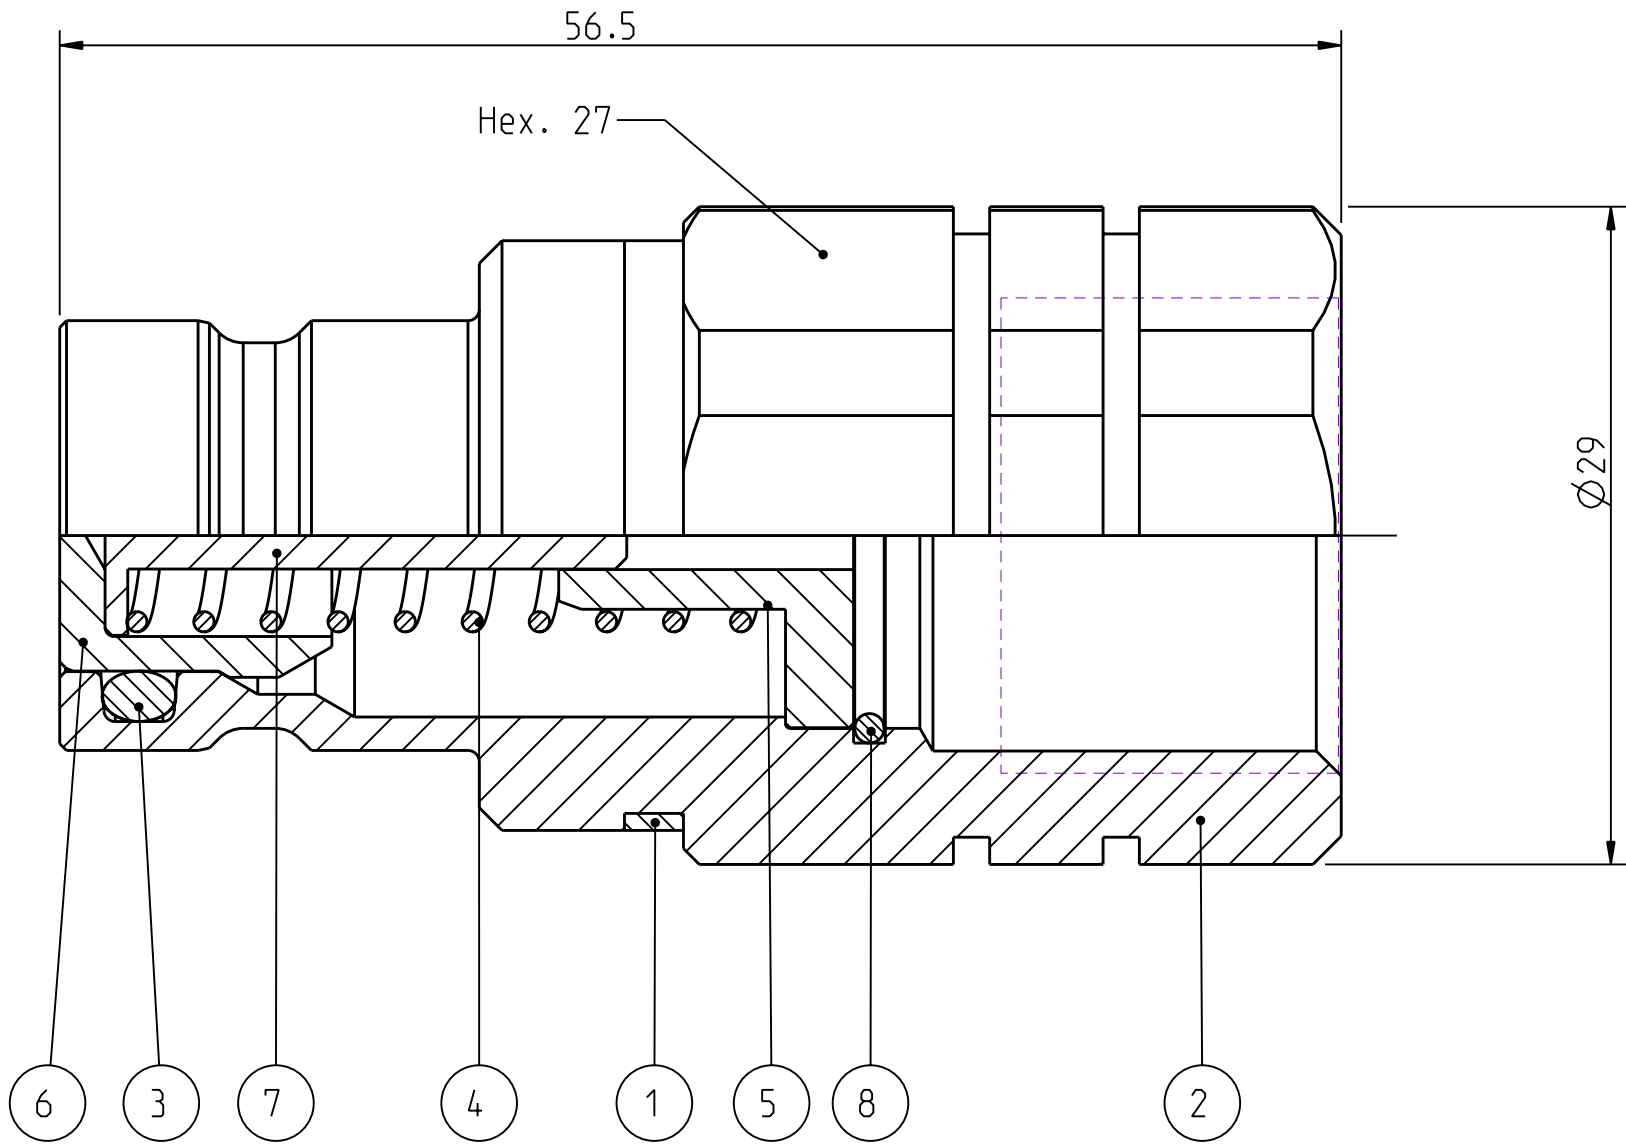

Product no: 10_577_6210		
Max working pressure:	20	bar connected
	20	bar disconnected
Min burst pressure:	80	bar connected
	80	bar disconnected
Sealing material:	FPM	
Temperatur range:	-5 °C - 205 °C	
Nominal flow diameter,DN:	9	mm
Connection	G 1/2" Female	
Connection stroke:	-	mm

8	1	Wire coil	Stainless steel
7	1	Valve pin	Acid-proof steel
6	1	Valve	Acid-proof steel
5	1	Stop for valve	Acid-proof steel
4	1	Spring	Acid-proof steel
3	1	O-ring	FPM
2	1	Nipple body	Acid-proof steel
1	1	Checking ring	Plastic
Detalj Item	Antal Quant.	Ben��mning Description	Material Material

	Skala Scale	3:1	Ritad Drawn	LJo	Kontr. Checked	–	Godk. Appr.	–	ÄM nr. Alt. no.	–	Dat. Date	060615
	Assembly drawing						Ritning nr./Drawing No.			Utg./Issue		
							50_577_6210			AA		