

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B

A

D

C

B


A

Hex 46

Hex 55

Ø59,5

120,6

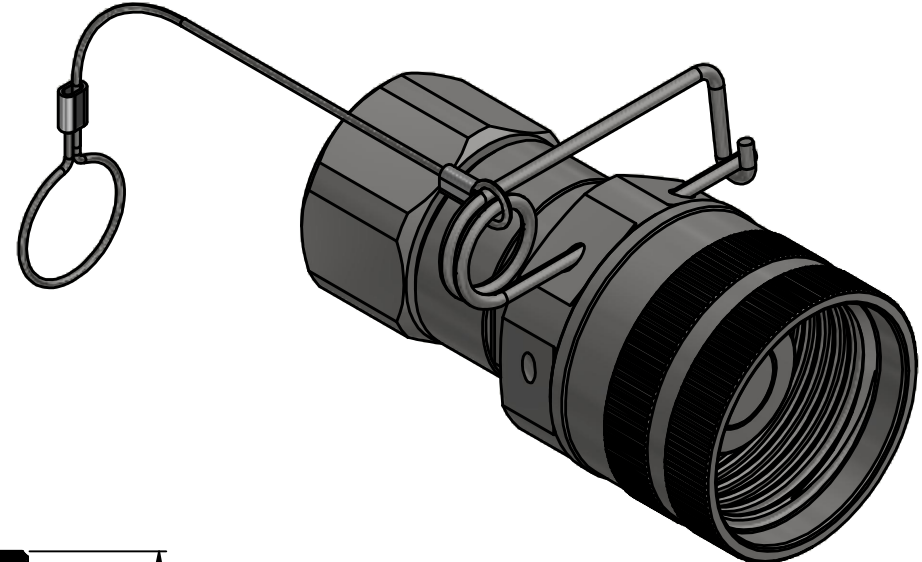

Product No. 106076101	
Nominal flow Ø DN:	mm
Connection Stroke:	mm
Max WP Connected:	420 bar
Max WP Disconnected:	400 bar
Min BP Connected:	1680 bar
Min BP Disconnected:	1000 bar
Temperature range:	-30°C - +100°C
Connection:	Rc 3/4" fem
Sealing material:	HNBR
Hexagon:	

9	1	Semi Asm, Valve package HNBR	
8	1	O-ring	HNBR
7	1	Semi Asm, Nipple Body	
6	1	Semi A. - Sprint and wire	
5	1	Wire coil	Stainless steel
4	1	Back up ring	PTFE
3	1	Back part	Steel, Zn-Ni 9 transp
2	1	Spring	Stainless steel
1	1	Locking Sleeve	Steel, Plated
Item	Qty	Description	Material
		Scale 1,5 : 1	Drawn CABANUN
		Checked EMPE	Appr. JOER
		ECO 001630	Date 2023-07-26
		Drawing No. 106076101	Issue D
			Sheet 1 /(1)



Assembly Drawing 106076101