

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B


A

D

C

B

A

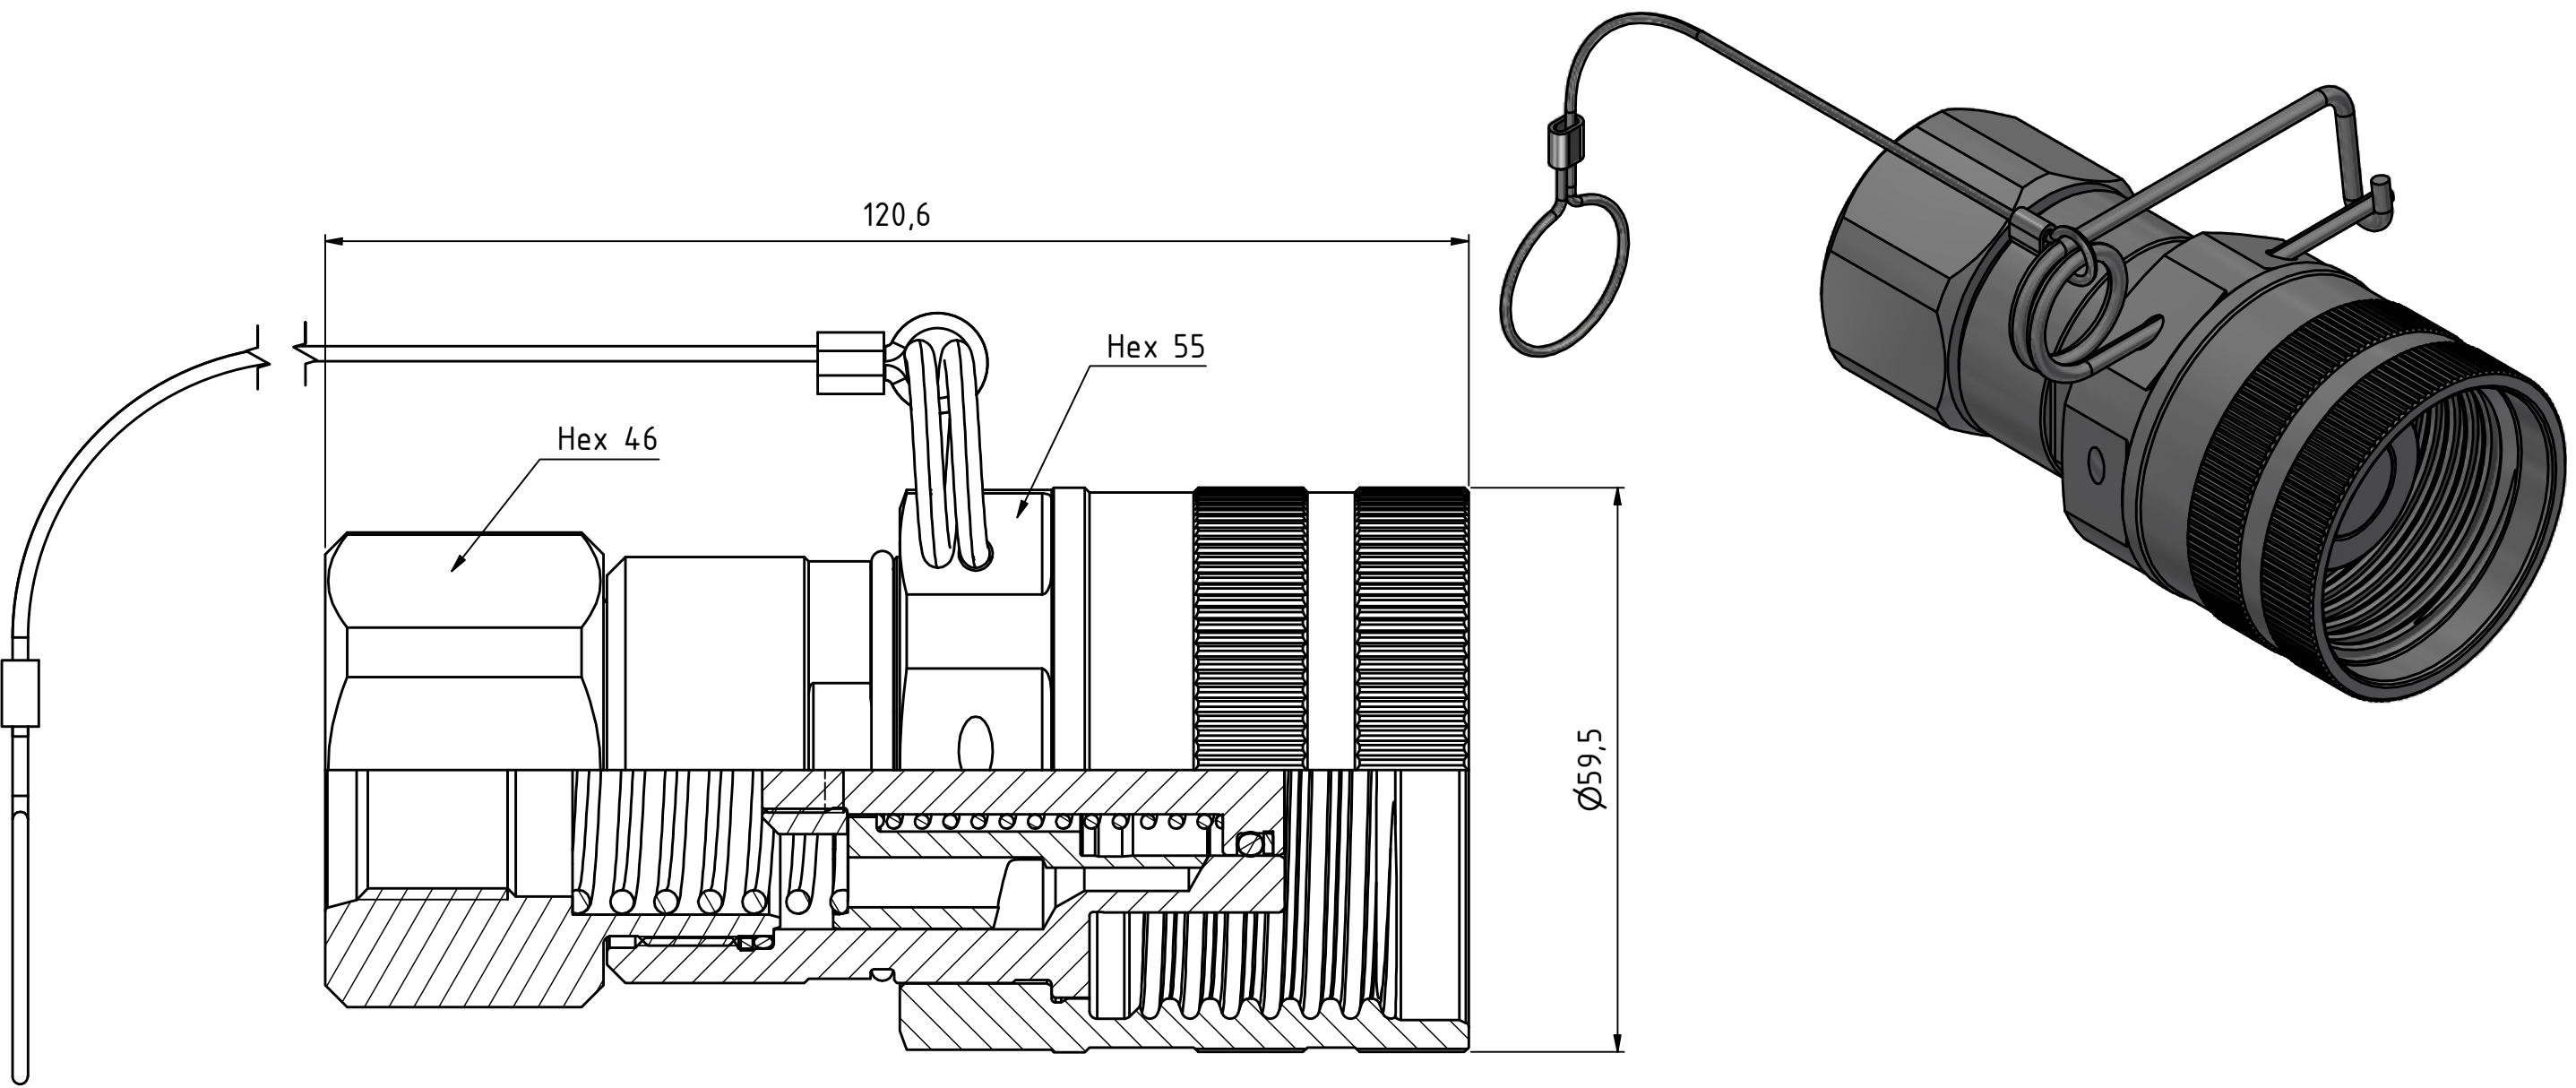

Product No. 106076601	
Nominal flow Ø DN:	mm
Connection Stroke:	mm
Max WP Connected:	420 bar
Max WP Disconnected:	400 bar
Min BP Connected:	1680 bar
Min BP Disconnected:	1000 bar
Temperature range:	-30°C - +100°C
Connection:	1 1/16"-12UN fem-SAE 3/4"
Sealing material:	HNBR
Hexagon:	

9	1	Semi Asm, Valve package HNBR	
8	1	Semi A. - Sprint and wire	
7	1	Wire coil	Stainless steel
6	1	Back up ring	PTFE
5	1	O-ring	NBR
4	1	Spring	Stainless steel
3	1	Back part	Steel, Zn-Ni 9 transp
2	1	Nipple Body	Harden. Steel, Plated
1	1	Locking Sleeve	Steel, Plated
Item	Qty	Description	Material
		Scale 1,4	Drawn CABANUN
		Checked EMPE	Appr. JOER
		ECO 001630	Date 2023-07-27
		Drawing No. 106076601	Issue D
			Sheet 1 /(1)



Assembly Drawing 106076601