
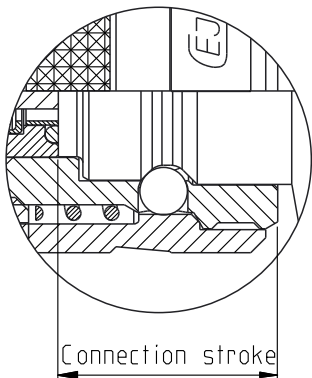


Product no: 10_665_1211		
Max working pressure:	400	bar connected
	400	bar disconnected
Min burst pressure:	1200	bar connected
	1200	bar disconnected
Sealing material:	FPM	
Temperatur range:	-20°C - 205 °C	
Nominal flow diameter,DN:	16	mm
Connection	G 3/4" Fem	
Connection stroke:	17.5	mm

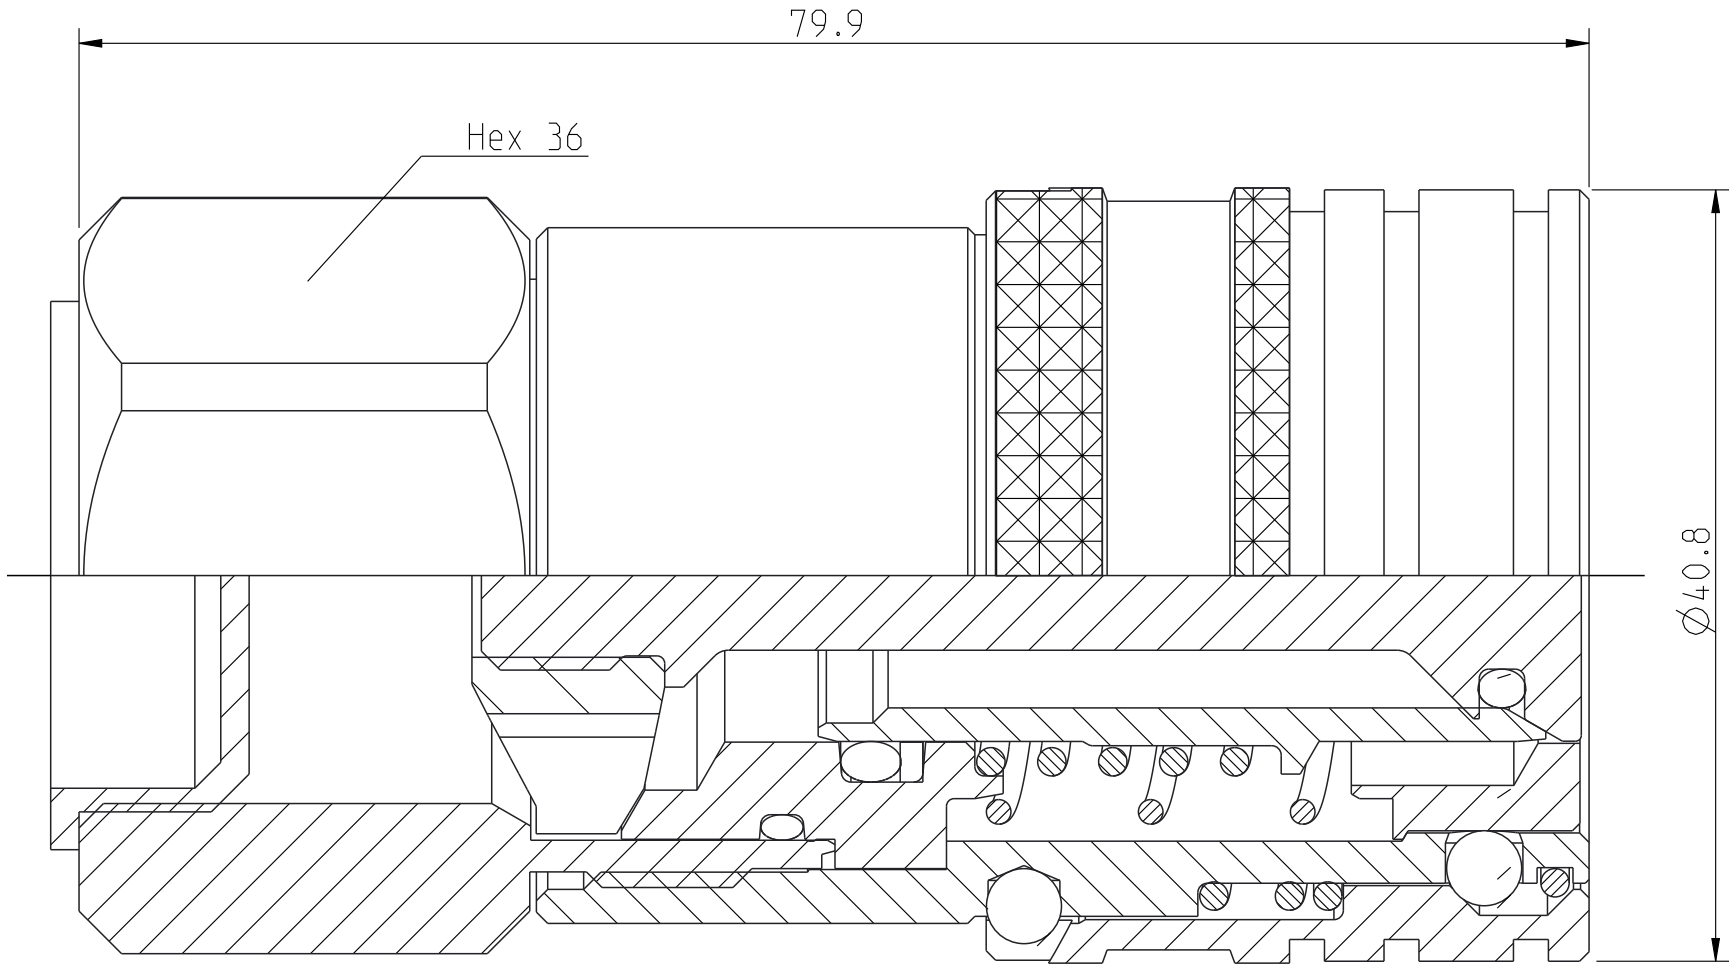

18	1	Wire coil	Stainless steel
17	1	Valve stop	Steel, Fe/Zn 8 P1
16	1	Valve sleeve	Steel, Plated
15	1	Valve seat	Steel, Fe/Zn 8 P1
14	1	Valve opener	Steel, Fe/Zn 5 P1
13	1	Thread protection	Plastic
12	1	Spring	Stainless steel
11	1	Spring	Stainless steel
10	1	Spring	Stainless steel
9	1	Ratchet sleeve	Steel, Zn-Ni 9 transp
8	1	O-ring	FPM
7	1	O-ring	FPM
6	1	O-ring	FPM
5	1	Locking sleeve	Steel, Zn-Ni 10 black
4	1	Front part	Steel, Zn-Ni 9 transp
3	16	Ball	Stainless steel
2	1	Backup ring	PTFE
1	1	Back part	Steel, Zn-Ni 9 transp
Detalj Item	Antal Quant.	Benämning Description	Material Material

	Skala Scale	5:2	Ritad Drawn	CEJN	Kontroll Checked	JoE	Godk. Appr.	PMB	Äm nr. Alt. no.	-	Dat. Date	14-05-19
	Assembly drawing		Ritning nr./Drawing No.		50_665_1211		Utg./Issue		AA			