



This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©

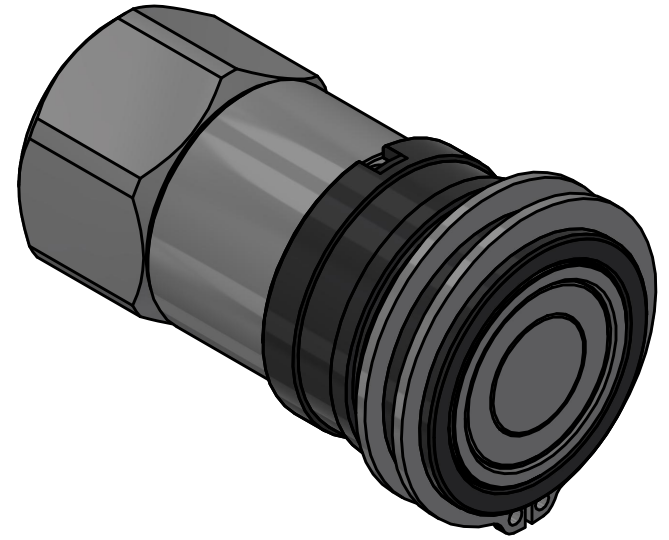

19	1	Stop for valve	Steel, Zn-plated	096653901
18	2	Retaining Ring SgA 41	Steel, Non Plated	069332622
17	1	Thread protection	Plastic	099501364
16	15	Ball	Stainless steel	091154800
15	1	O-ring	NBR	094142800
14	1	O-ring	NBR	099712800
13	1	O-ring	NBR	097522800
12	1	Valve opener	Steel, Zn-Ni transp.	096657020
11	1	Valve sleeve	Steel, Plated	096655700
10	1	Backup ring	Plastic	096655600
9	1	Back part	Steel, Zn-Ni 9 transp	096657321
8	1	Valve seat	Steel, Fe/Zn 8 P1	096654000
7	1	Ratchet sleeve	Steel, Zn-Ni 9 transp	096653520
6	1	Spring	Stainless steel	096653201
5	1	Spring	Stainless steel	096653200
4	1	Spring	Stainless steel	096653100
3	1	Wire coil	Stainless steel	096652600
2	1	Locking sleeve	Steel, Zn-Ni 10 black	096652520
1	1	Front part	Steel, Zn-Ni 9 transp	096652020
Item	Qty	Description	Material	Part Number
		Scale	Drawn	Checked
		2 : 1	CABJOER	
		Appr.		ECO
				12355
		Date		2019-01-29
		Drawing No.		Issue
		106651281		Sheet
		B		1 /(1)

Product No. 106651281	
Nominal flow Ø DN:	16 mm
Connection Stroke:	17.5 mm
Max WP Connected:	400 bar
Max WP Disconnected:	400 bar
Min BP Connected:	1200 bar
Min BP Disconnected:	1200 bar
Temperature range:	-30°C - 100°C
Connection:	G 3/4" Fem
Sealing material:	NBR
Hexagon:	36

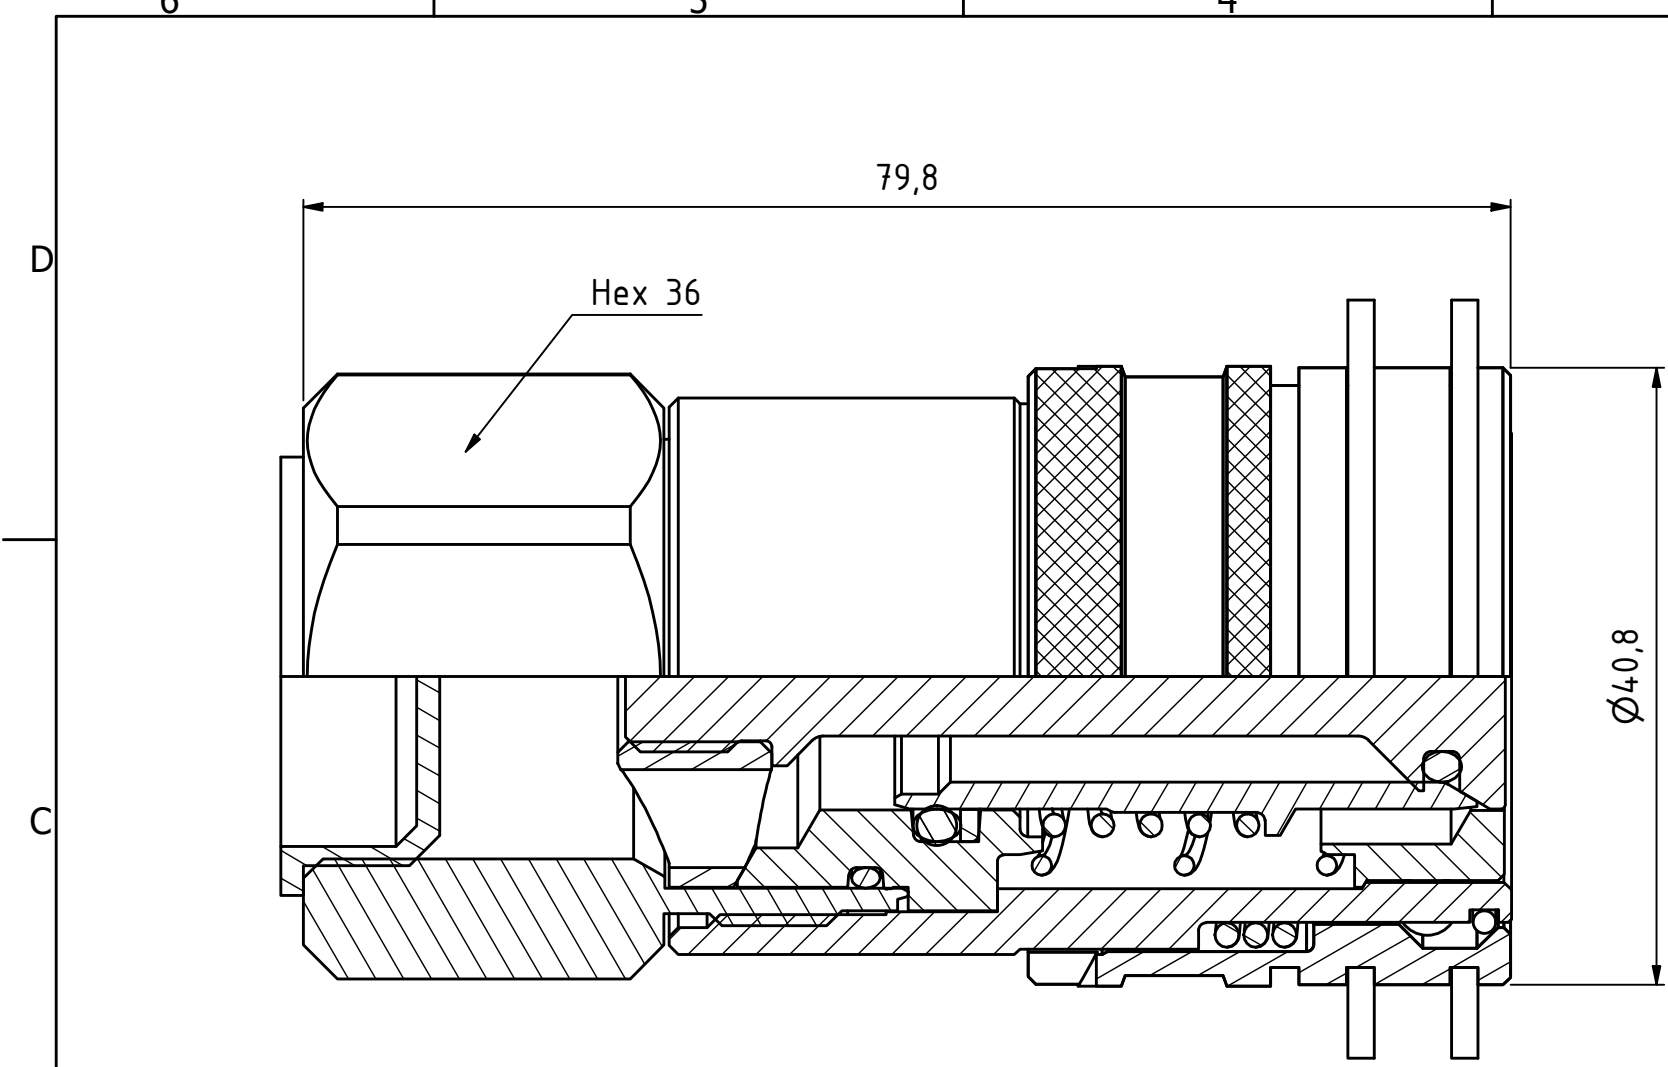

Assembly Drawing 106651281

ECO

12355

Date

2019-01-29

Issue

B

Sheet

1 /(1)