


Alla rättigheter förbehålls.
 All rights reserved.
 Alle Rechte vorbehalten.

Diese Zeichnung darf weder ganz noch teilweise ohne unsere ausdrückliche Genehmigung kopiert oder auf andere Weise vervielfältigt werden.

Denna handling får ej utan vårt medgivande delges annan, kopieras eller eljest obehörigen användas.
 Överlåtelse härvid beivras med stöd av gällande lag.
 This document must not be copied, either completely or in part, without permission.
 Any infringement will have legal consequences.

A3

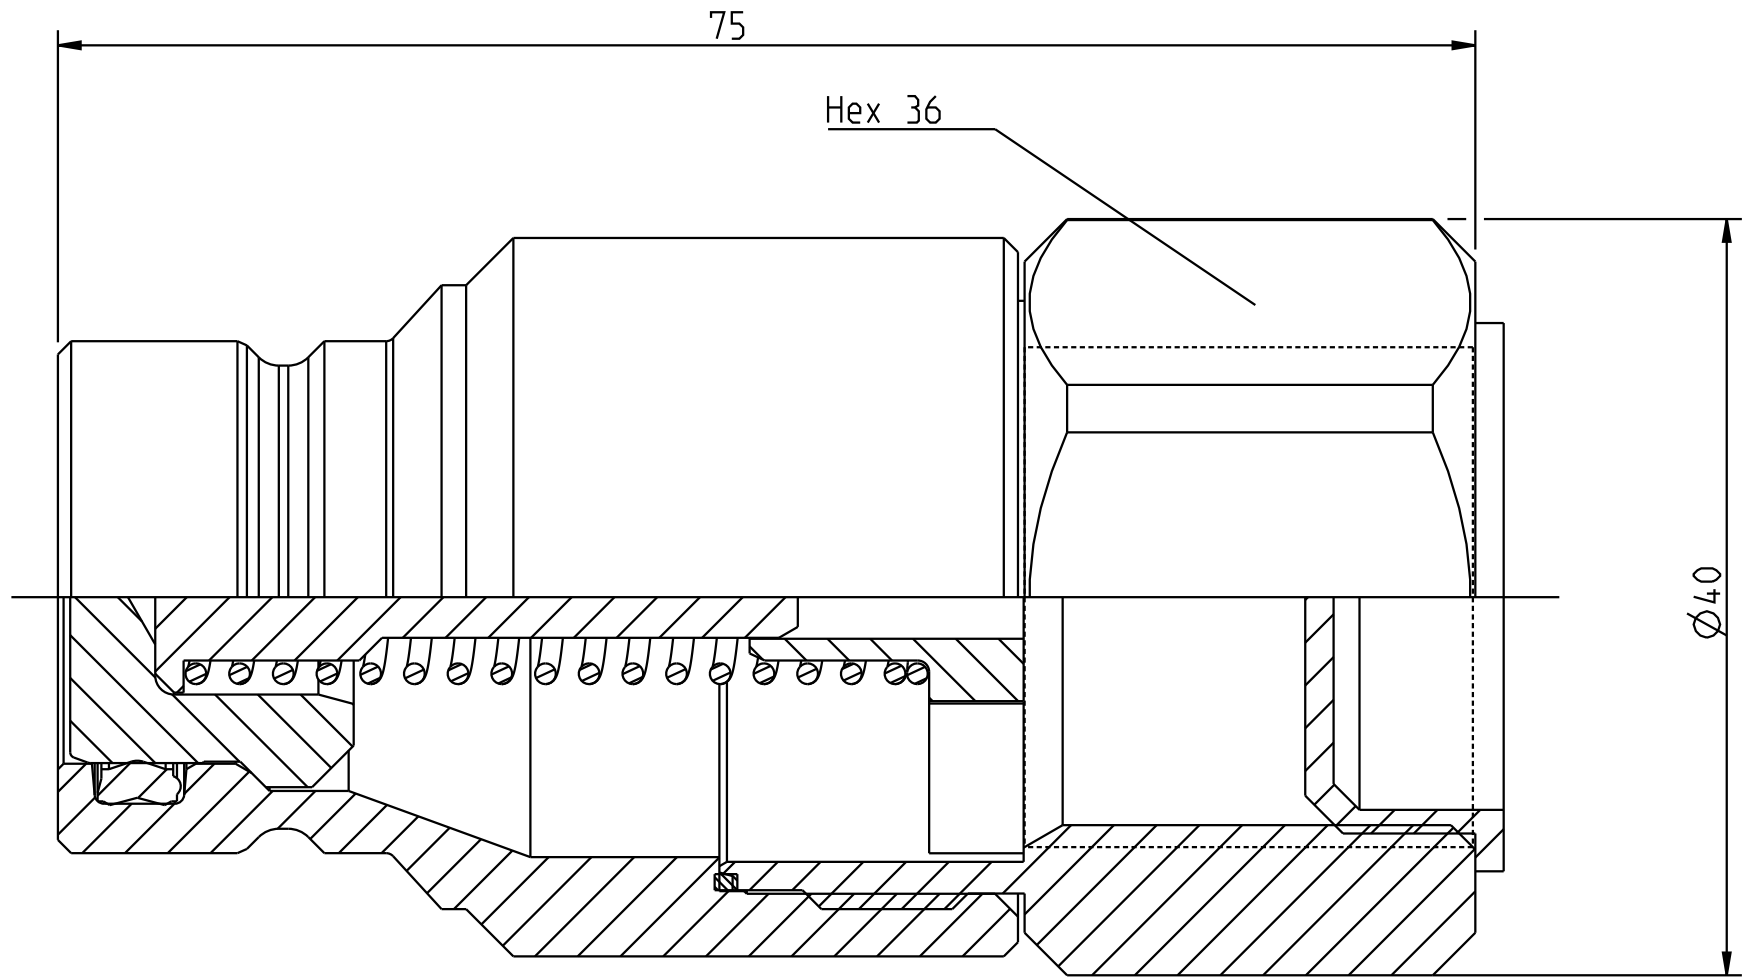

Product no: 10_665_6201			
Max working pressure, static:	400	bar	
Max working pressure, dynamic:	250	bar	
Min burst pressure:	1200	bar connected	
	1200	bar disconnected	
Sealing material:	PUR		
Temperatur range:	-30°C - +100 °C		
Nominal flow diameter,DN:	16	mm	
Connection	G 3/4"	Fem	
Connection stroke:	-	mm	

9	1	Valve stop	Brass
8	1	Valve	Steel, Ni 8, Silver
7	1	Thread protection	Plastic
6	1	Spring	Stainless steel
5	1	Profile sealing	PUR
4	1	Pin	Steel
3	1	Nipple body	Hard. steel, Zn silver
2	1	Flat seal	Plastic
1	1	Back part	Steel, Fe/Zn 8 P1
Detalj Item	Antal Quant.	Benämning Description	Material Material

	Skala Scale	5:2	Ritad Drawn	JoEr	Kontroll. Checked	MLi	Godk. Appr.	PMB	Äm nr. Alt. no.	10051	Dat. Date	120410
	Assembly drawing		Ritning nr/Drawing No.				50_665_6201		Utg./Issue			AC