


Product no: 10_665_6211		
Max working pressure:	400	bar connected
	400	bar disconnected
Min burst pressure:	1200	bar connected
	1200	bar disconnected
Sealing material:	FPM	
Temperatur range:	-20��C - 205 ��C	
Nominal flow diameter,DN:	16	mm
Connection	G 3/4'' Fem	
Connection stroke:	17.5	mm

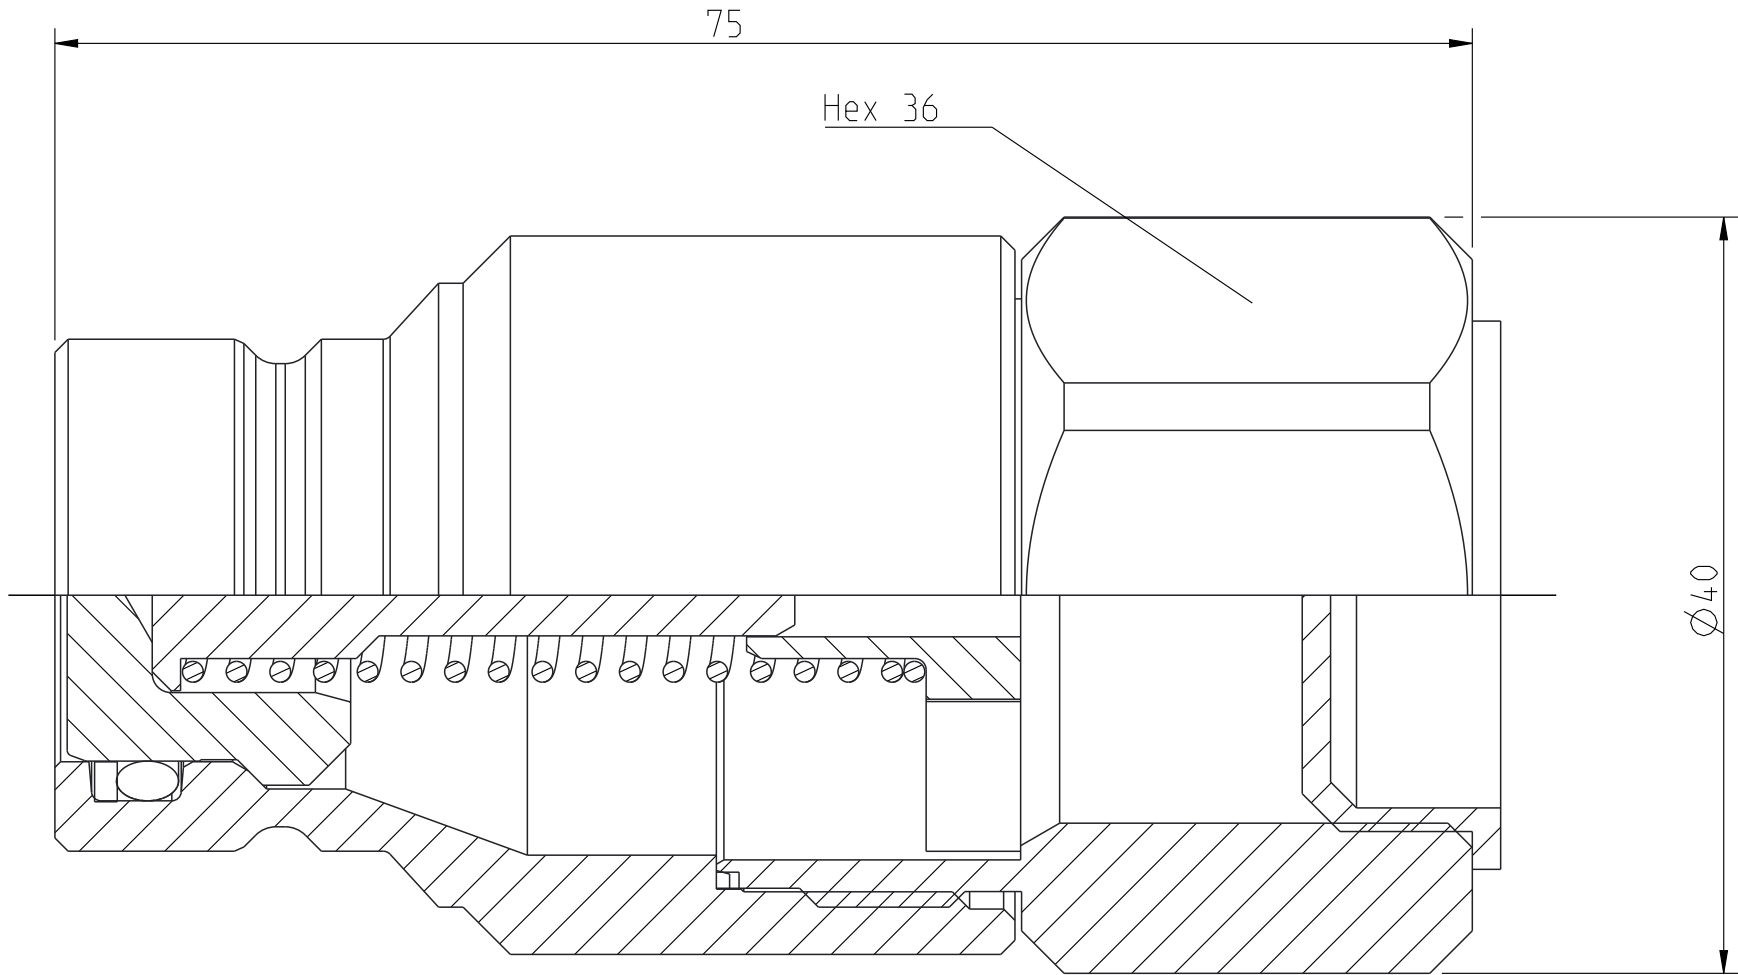

10	1	Valve stop	Brass
9	1	Valve	Steel, Plated
8	1	Thread protection	Plastic
7	1	Spring	Stainless steel
6	1	Pin	Steel
5	1	O-ring	FPM
4	1	Nipple body	Hard. steel, Zn-Ni 9 transp
3	1	Flat seal	PTFE
2	1	Backup ring	PTFE
1	1	Back part	Steel, Zn-Ni 9 transp
Detalj Item	Antal Quant.	Ben��mning Description	Material Material

	Skala Scale	5:2	Ritad Drawn	CABPEOD	Kontr. Checked	JoEr	Godk. Appr.	PMB	ÄM nr. Alt. no.	-	Dat. Date	14-05-19
	Assembly drawing							Ritning nr/Drawing No.		50_665_6211	Utg./Issue	