


Allo r  lligheter f  rbeh  lls.
All rights reserved.
Alle Rechte vorbehalten.

Diese Zeichnung darf weder ganz noch teilweise ohne unsere ausdr  ckliche
Genehmigung kopiert oder auf andere Weise vervielf  ltig werden.
werden. Zuwiderhandlungen werden gerichtlich verfolgt.

Den teckning f  r ej inte f  rmedla eller: om, lagras eller elj  r igen anv  ndas.
  vertr  delse b  tr  d beivras med st  d om g  llande lag.
This document must not be copied, either completely or in part, without permission.
Any infringement will have legal consequences.

A3

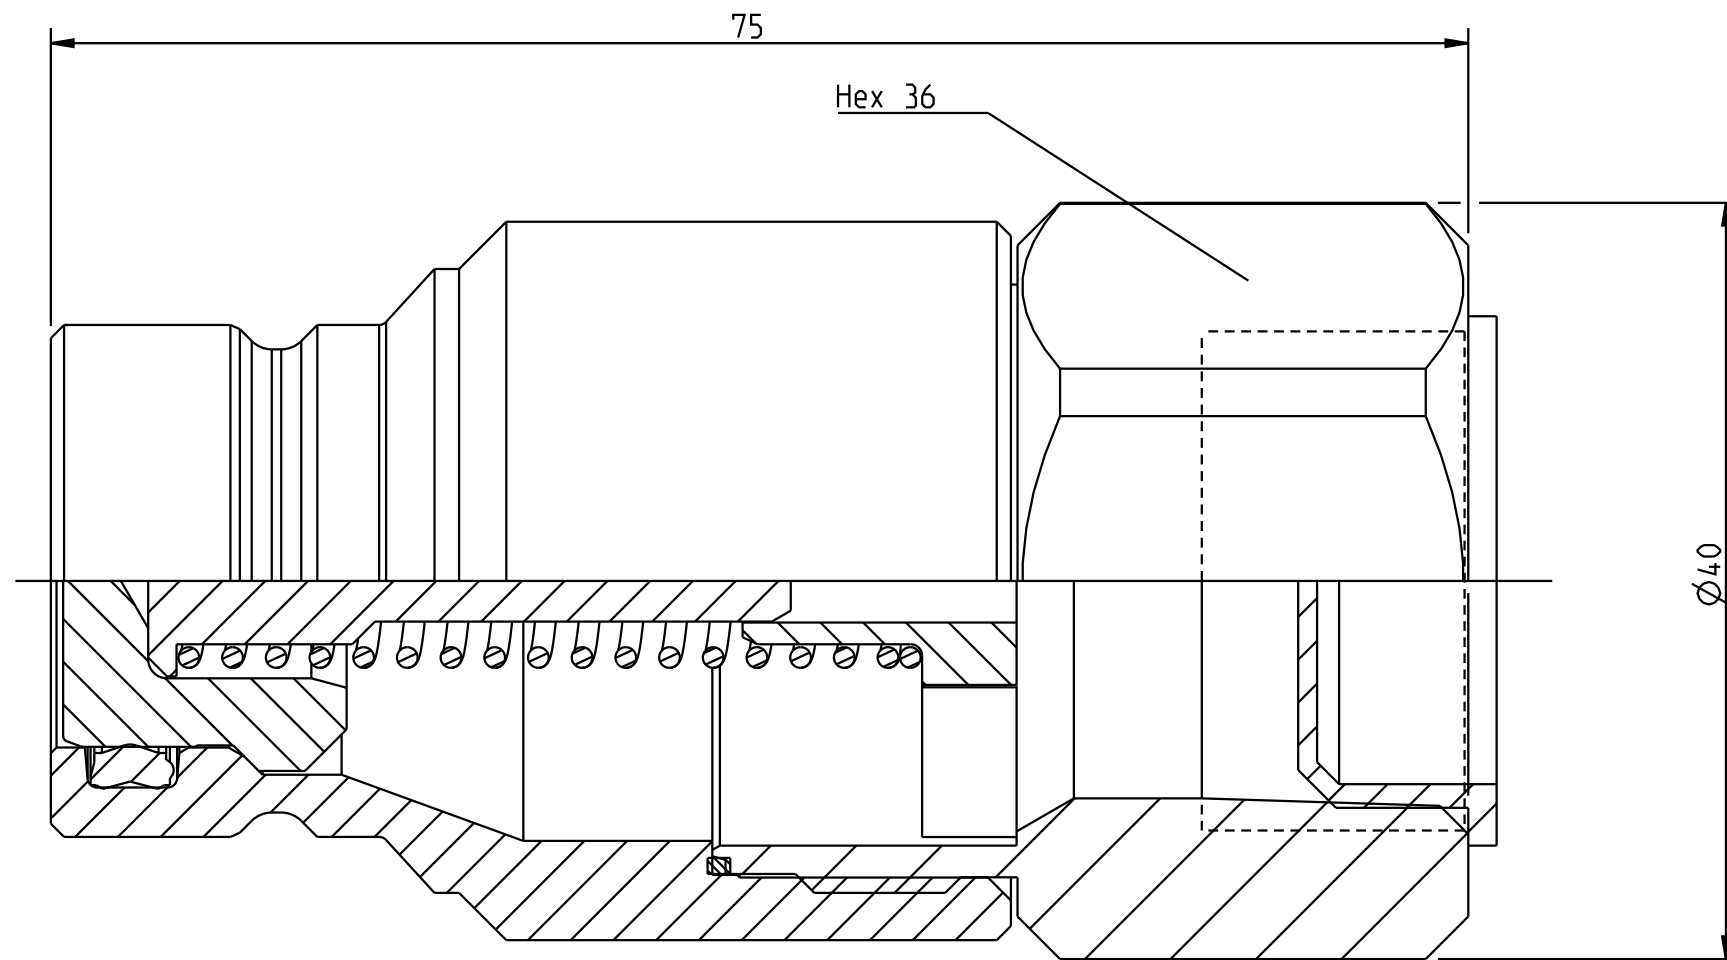

Product no: 10_665_6401

Max working pressure, static: 400 bar
Max working pressure, dynamic: 250 bar
Min burst pressure: 1200 bar connected
1200 bar disconnected
Sealing material: PUR
Temperatur range: -30 C - +100  C
Nominal flow diameter, DN: 16 mm
Connection: 3/4" NPT Fem
Connection stroke: - mm

9	1	Valve stop	Brass
8	1	Valve	Steel, Ni 8, Silver
7	1	Thread protection	Plastic
6	1	Spring	Stainless steel
5	1	Profile sealing	PUR
4	1	Pin	Steel
3	1	Nipple body	Hard. steel, Zn silver
2	1	Flat seal	Plastic
1	1	Back part	Steel, Fe/Zn 8 P1
Detalj Item	Antal Quant.	Ben��mning Description	Material Material

CEJN

Skala Scale	5:2	Rit��d Drawn	JoEr	Kontr. Checked	MLi	Godk. Appr.	PMB	��m nr. Att. no.	10051	Dat. Date	120410
Assembly drawing								Ritning nr/Drawing No.		Utg./Issue	
								50_665_6401		AC	