

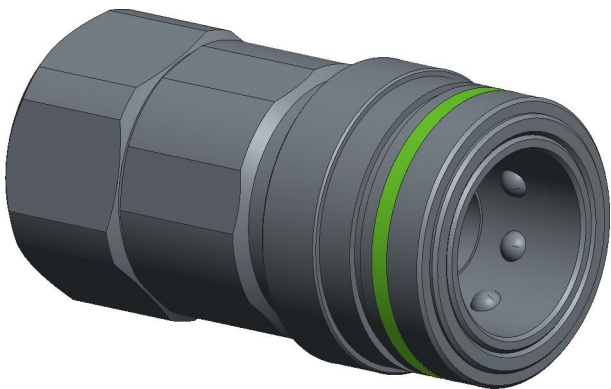


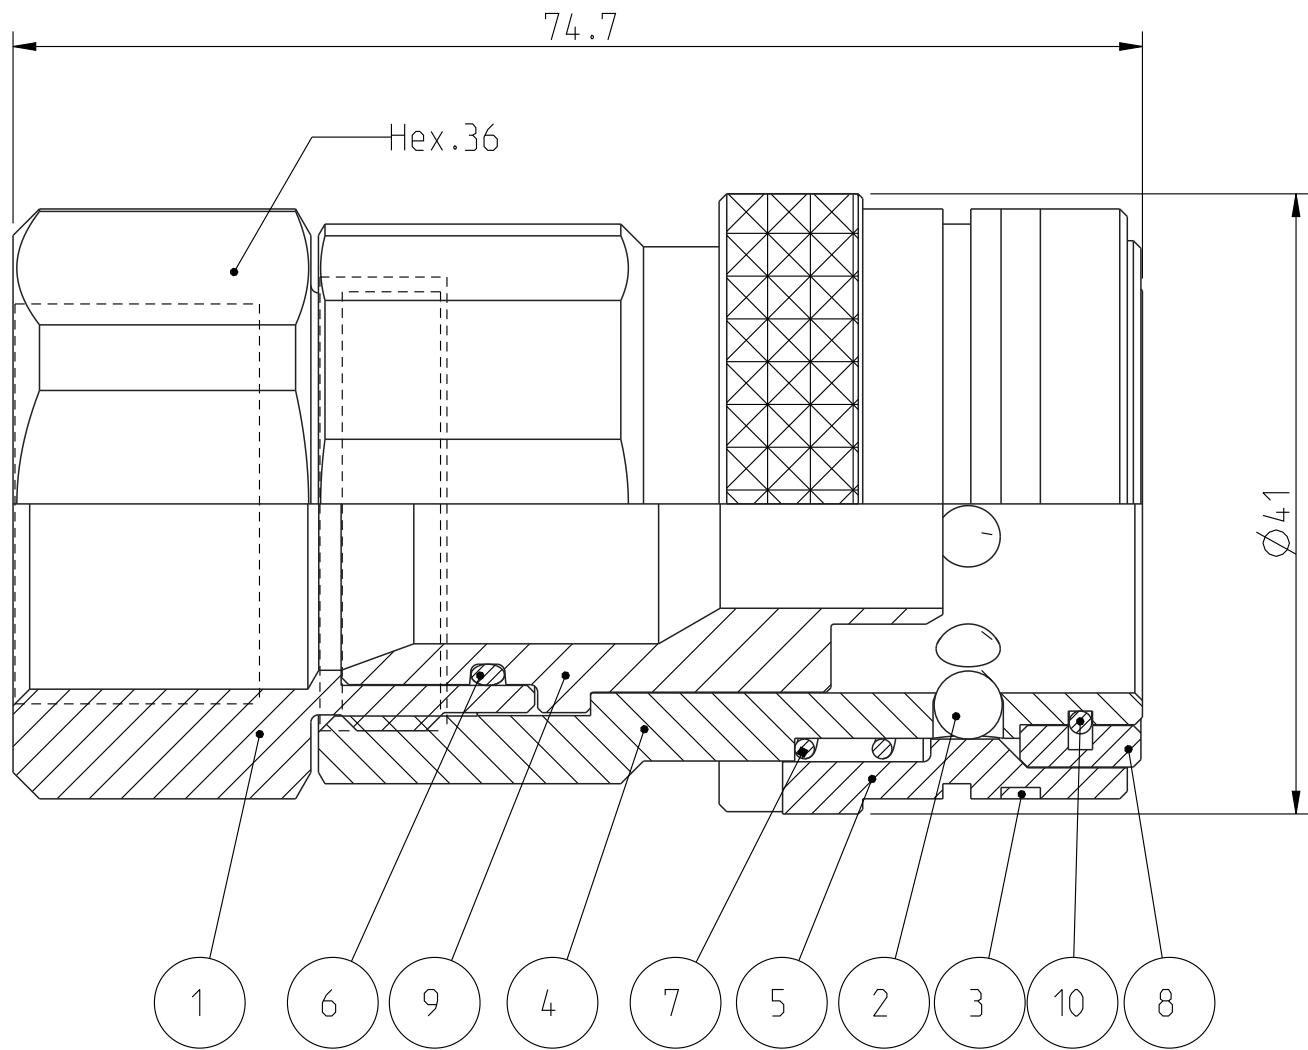

1:1

Product no: 10_667_0200		
Max working pressure:	20	bar connected
	-	bar disconnected
Min burst pressure:	80	bar connected
	-	bar disconnected
Sealing material:	NBR	
Temperatur range:	-15 °C - 100 °C	
Nominal flow diameter,DN:	14 mm	
Connection	G 3/4" Female	
Connection stroke:	19.8 mm	

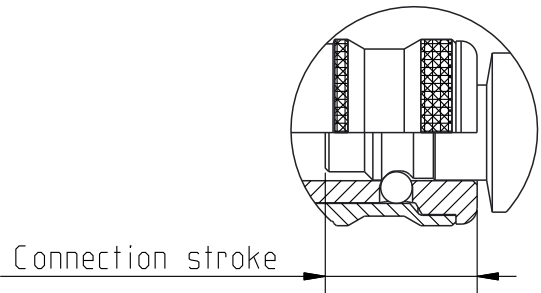

10	1	Wire coil	Acid-proof steel
9	1	Valve sleeve	Brass, CuNi5b
8	1	Stop flange	Brass, CuNi5b
7	1	Spring	Acid-proof steel
6	1	O-ring	NBR
5	1	Locking sleeve	Brass, CuNi5b
4	1	Coupling body	Brass, CuNi5b
3	1	Checking ring	Plastic, Green
2	9	Ball	Stainless steel
1	1	Adaptor	Brass, CuNi5b
Detalj Item	Antal Quant.	Benämning Description	Material Material

	Skala Scale	2:1	Ritad Drawn	PGU	Kontr. Checked	J00L	Godk. Appr.	MAh	Äm nr. Alt. no.	10878	Dat. Date	140813
	Assembly drawing							Ritning nr/Drawing No.			Utg./Issue	
							50_667_0200			AD		