
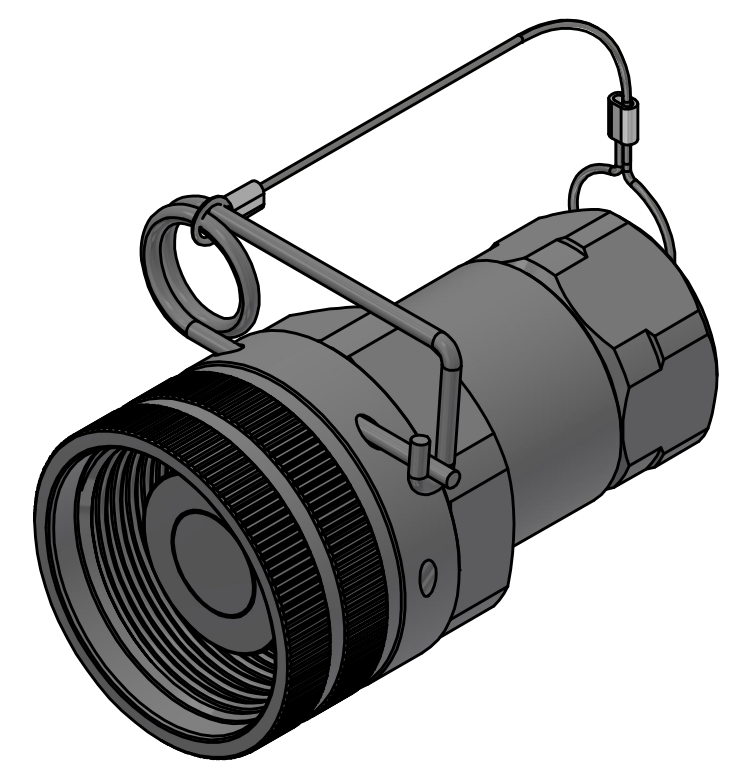


This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©

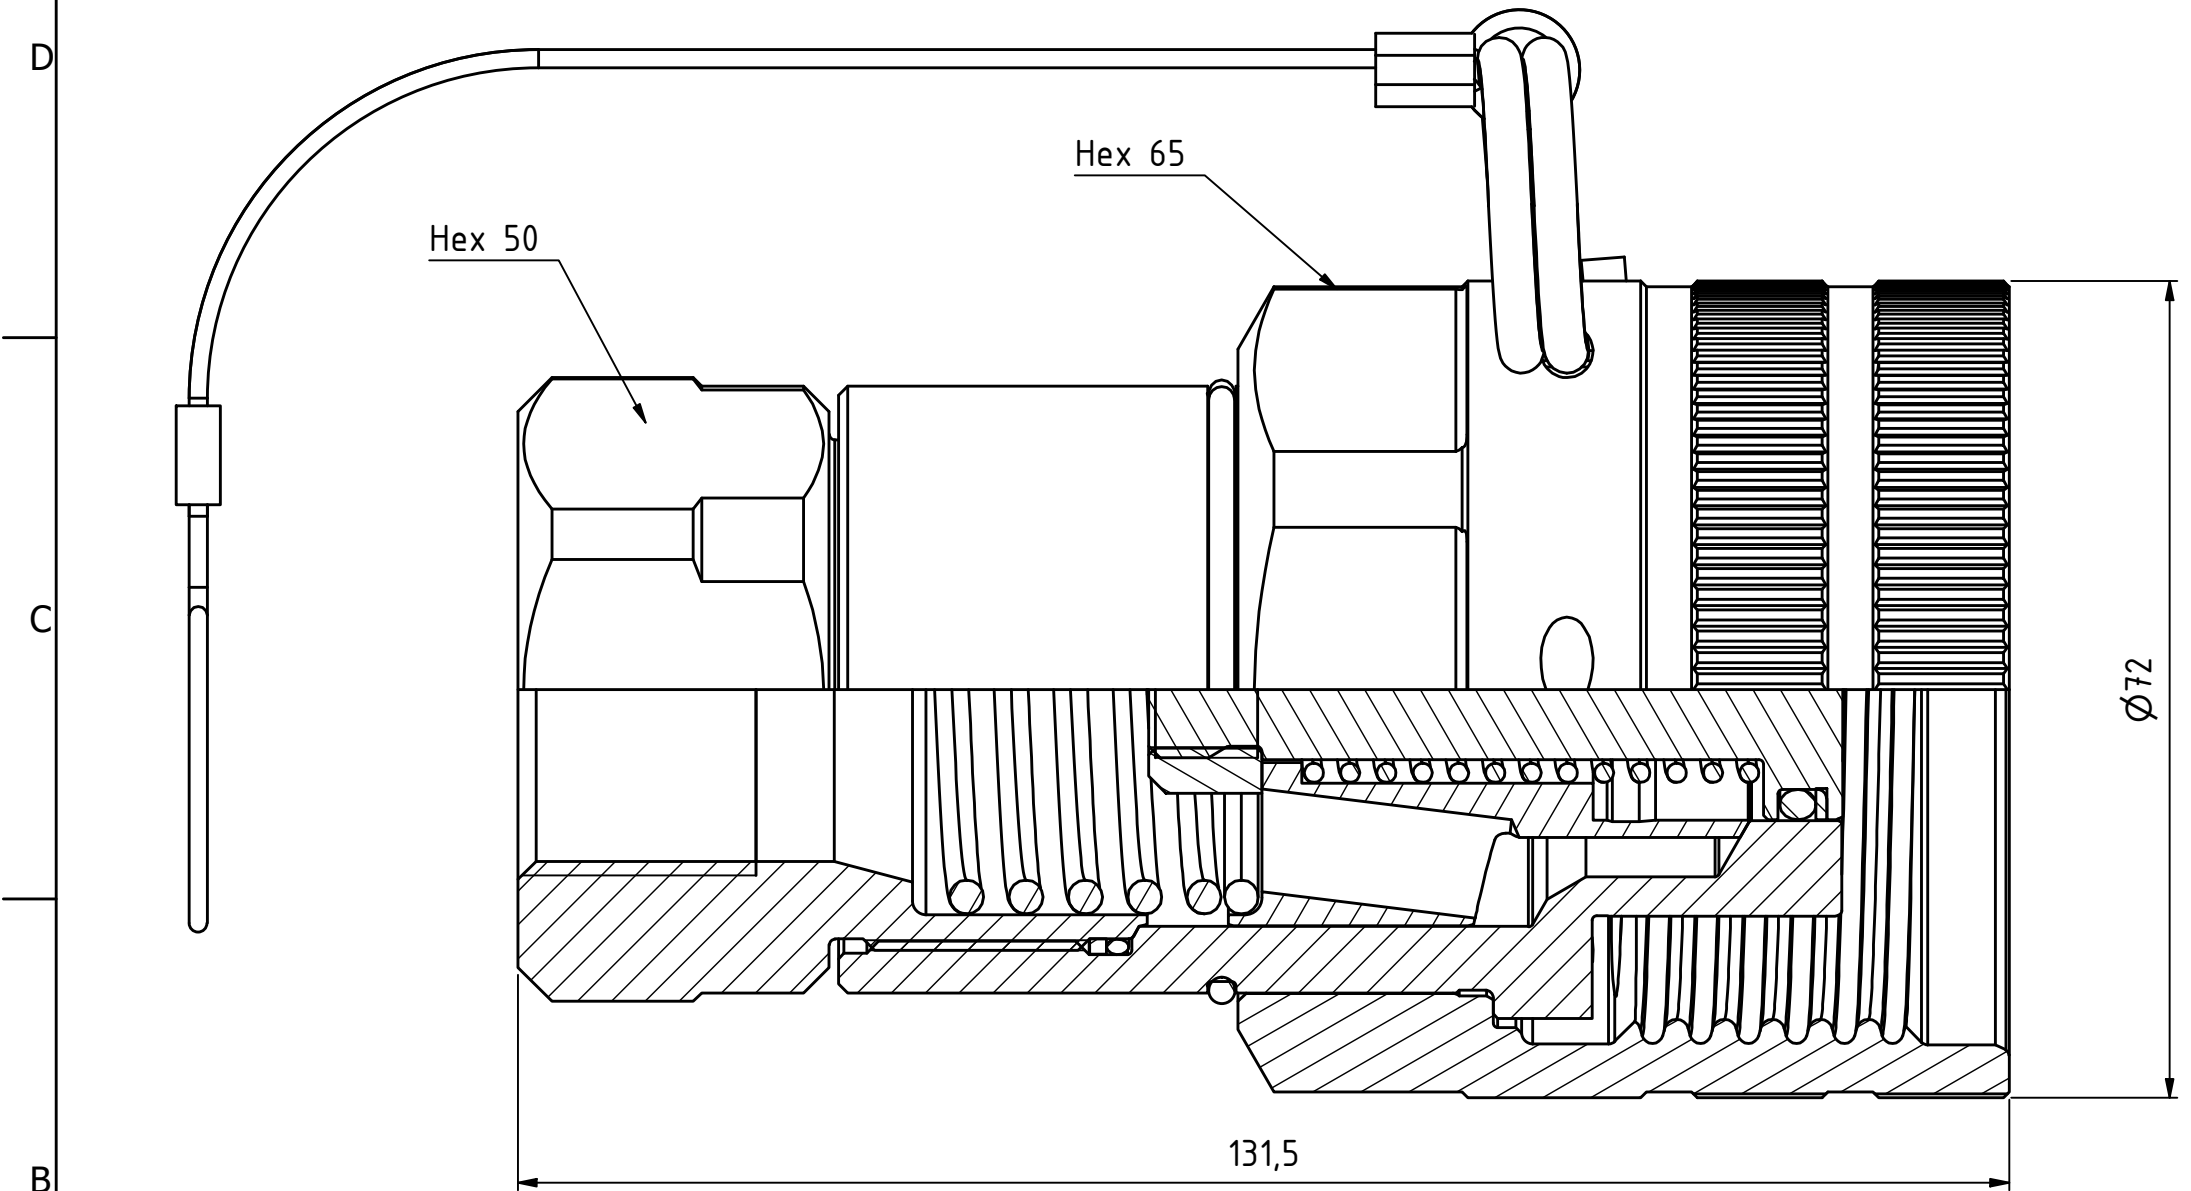

1 : 1,5

Product No. 107076203	
Nominal flow Ø DN:	mm
Connection Stroke:	mm
Max WP Connected:	420 bar
Max WP Disconnected:	400 bar
Min BP Connected:	1680 bar
Min BP Disconnected:	1000 bar
Temperature range:	-30°C - +120°C
Connection:	G 1" fem
Sealing material:	HNBR
Hexagon:	

9	1	Semi Assembly - Valve		097079004
8	1	O-ring	HNBR	097072880
7	1	Semi A. - Sprint and wire		098079004
6	1	Back-up ring	PTFE	097075652
5	1	Wire coil	Stainless steel	097072600
4	1	Spring	Stainless steel	099843250
3	1	Back part	Steel, Zn-Ni	097074323
2	1	Locking Sleeve	Steel, Zn-Ni	097072500
1	1	Nipple Body	Steel hard., Plated	097072300
Item	Qty	Description	Material	Part Number
State		Drawn	Checked	Approved
Production		CABANUN	BW	JOER
				Date
				2024-06-04
				Scale
				1,5 : 1
				Issue
				Sheet
				1 / (1)



Nipple TLX G 1" fem HNBR

ECO
001681

Former No.
OF_000_110515

Drawing No.

107076203

Issue

C

Sheet

1 / (1)