
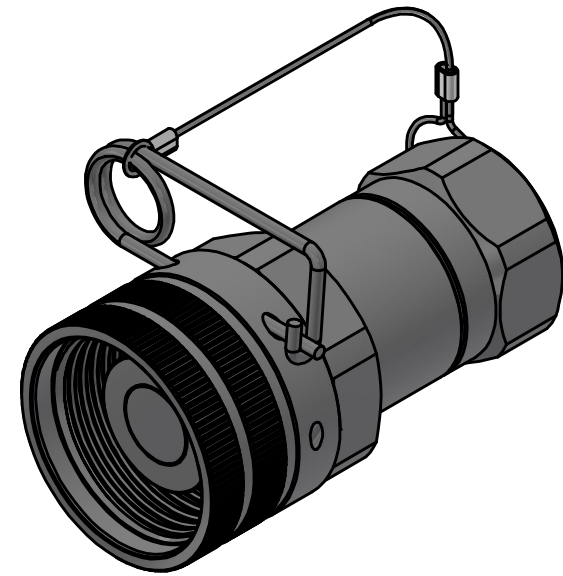


This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©

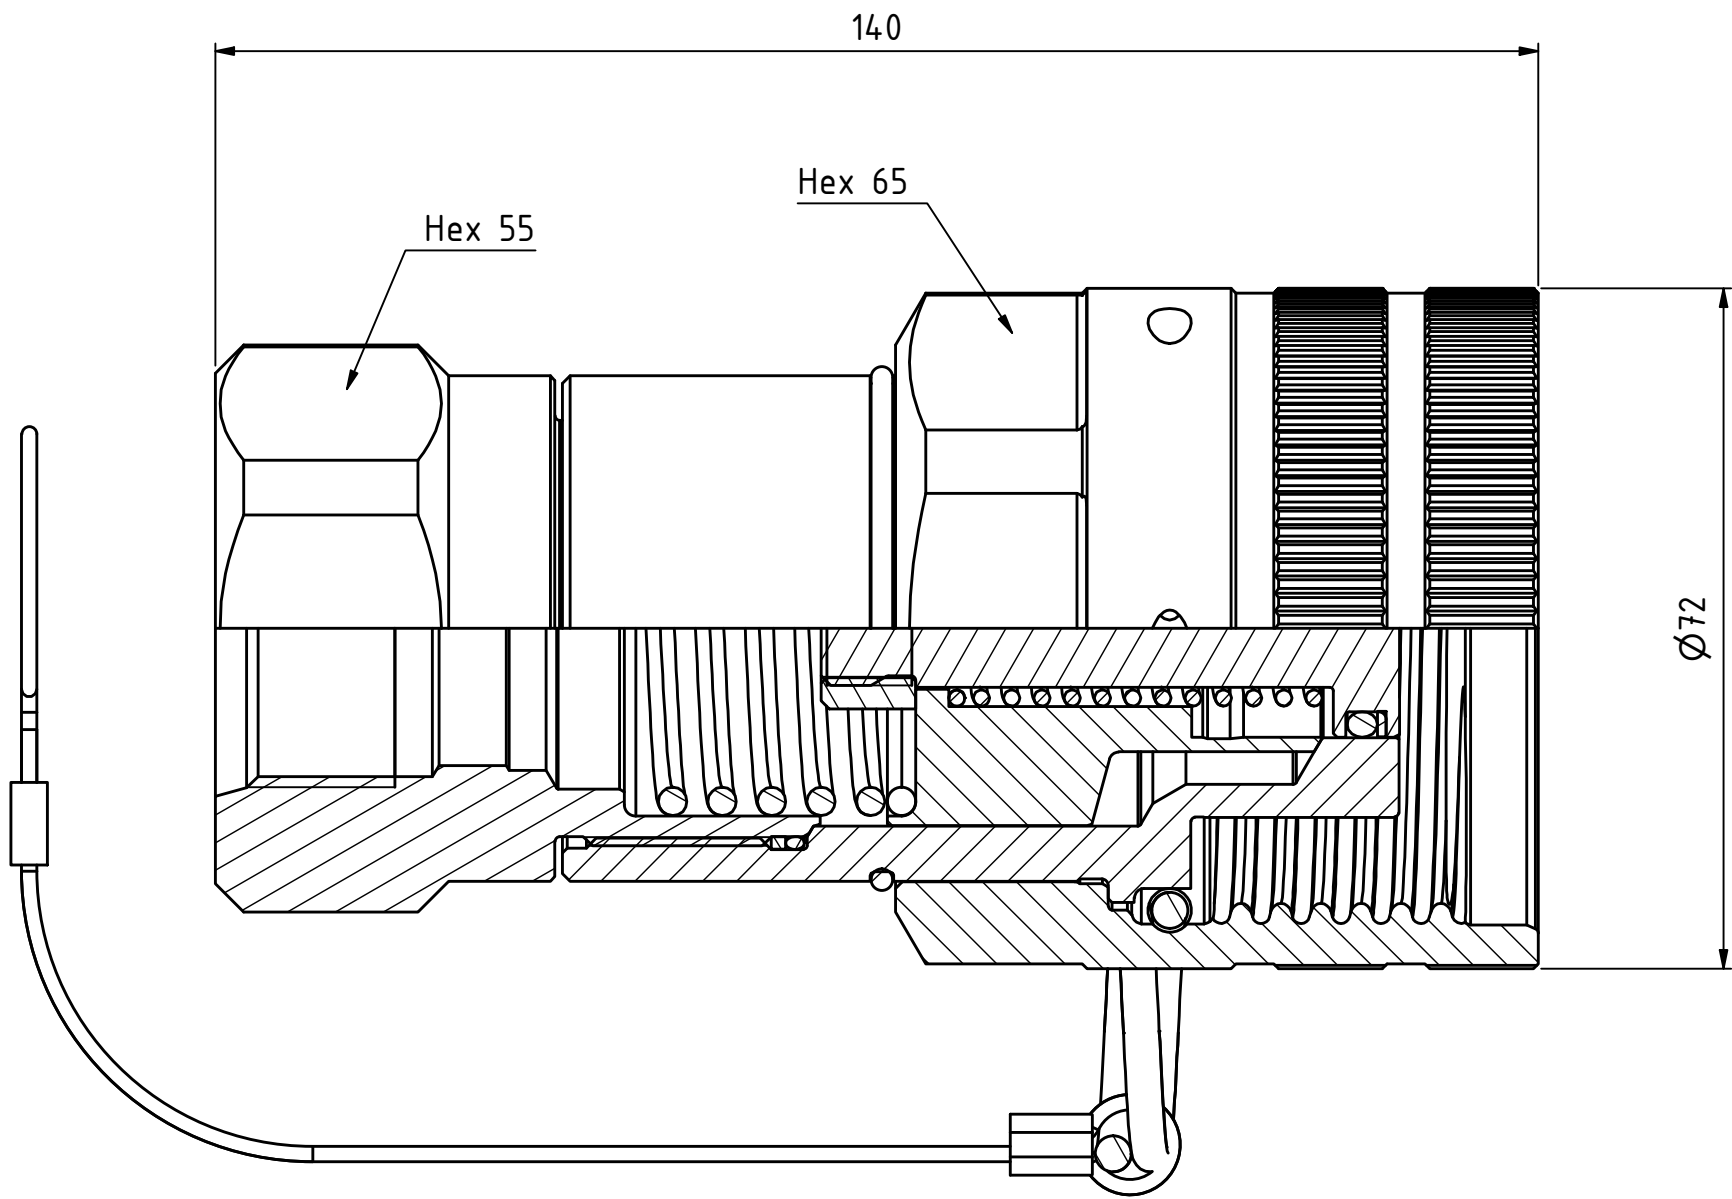

1 : 2

Product No. 107076603	
Nominal flow Ø DN:	mm
Connection Stroke:	mm
Max WP Connected:	420 bar
Max WP Disconnected:	400 bar
Min BP Connected:	1680 bar
Min BP Disconnected:	1000 bar
Temperature range:	-30°C - +120°C
Connection:	1 5/16"-12UN fem - SAE 1" ORB
Sealing material:	HNBR
Hexagon:	

9	1	Semi Assembly - Valve	
8	1	O-ring	HNBR
7	1	Semi A. - Sprint and wire	
6	1	Back-up ring	PTFE
5	1	Wire coil	Stainless steel
4	1	Spring	Stainless steel
3	1	Back part	Steel, Zn-Ni 9 transp
2	1	Locking Sleeve	Steel, Zn-Ni
1	1	Nipple Body	Steel hard., Plated
Item	Qty	Description	Material
State		Drawn	Checked
Production		CABANUN	BW
		Approved	Date
		JOER	2024-06-04
		ECO	Former No.
		001681	Scale
		Drawing No.	1,25 : 1
		107076603	Issue
			Sheet
			1 /(1)
			D