

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©





D

C

B

A

Product No. 107651211	
Nominal flow Ø DN:	19 mm
Connection Stroke:	21,5 mm
Max WP Connected:	400 bar
Max WP Disconnected:	400 bar
Min BP Connected:	1200 bar
Min BP Disconnected:	1200 bar
Temperature range:	-20°C - +205°C
Connection:	G 3/4" Fem
Sealing material:	FPM

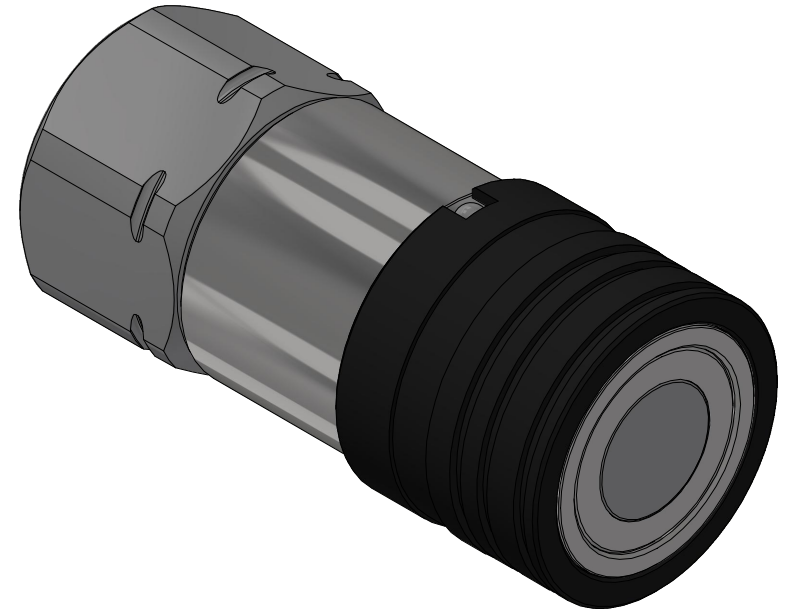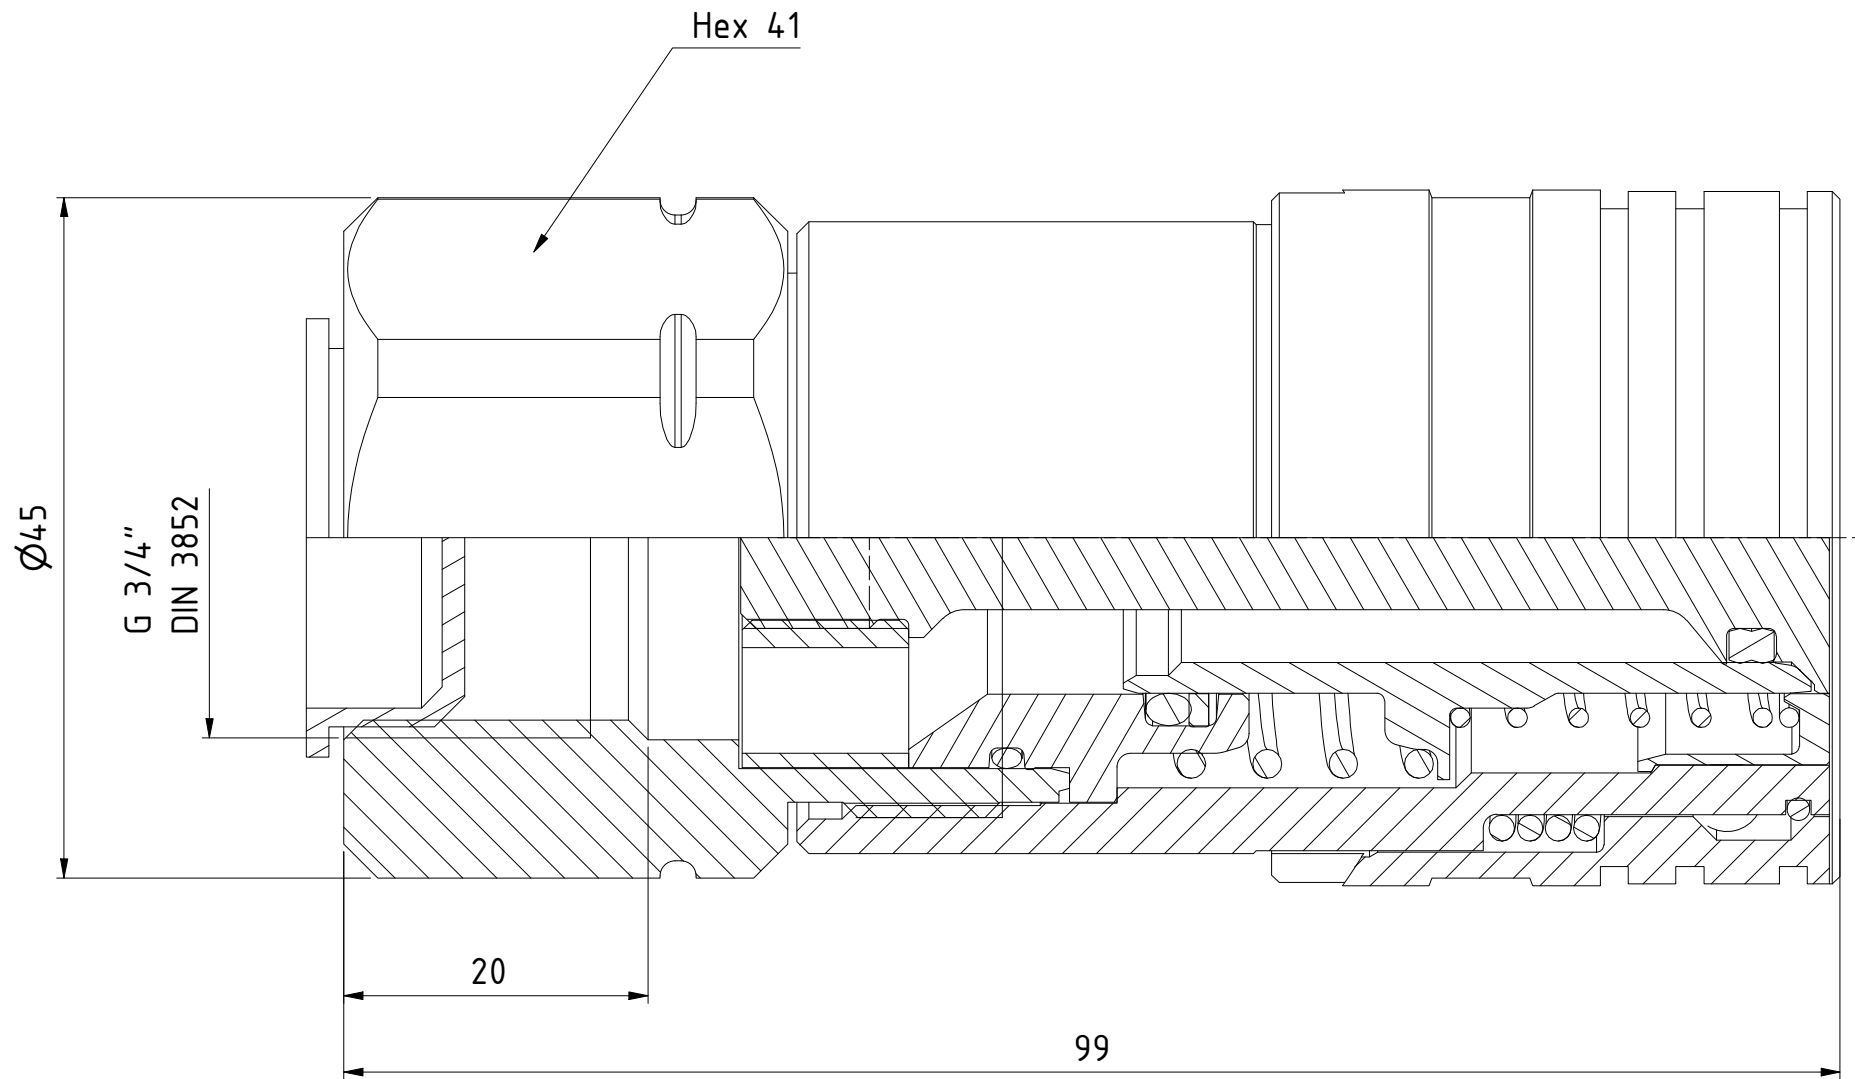

1 : 1

D

C

B

A

6	1	Semi Assembly Valve FPM		097659010
5	1	Thread protection	Plastic	099501364
4	1	Back part	Steel, Zn-Ni 9 transp	097657328
3	1	Spring	Steel	097653201
2	1	Ratchet sleeve	Steel, Zn-Ni	097653520
1	1	Semi Assembly F. Part		097659004
Item	Qty	Description	Material	Part Number
State		Drawn	Checked	Approved
Production		CABPEOD	JE	PMB
		ECO		Former No.
				Date
				2024-03-07
				Scale
				2 : 1
				Issue
				A
				Sheet
				1 /(1)



Coupling G 3/4" fem FPM

Drawing No.
107651211