


This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©

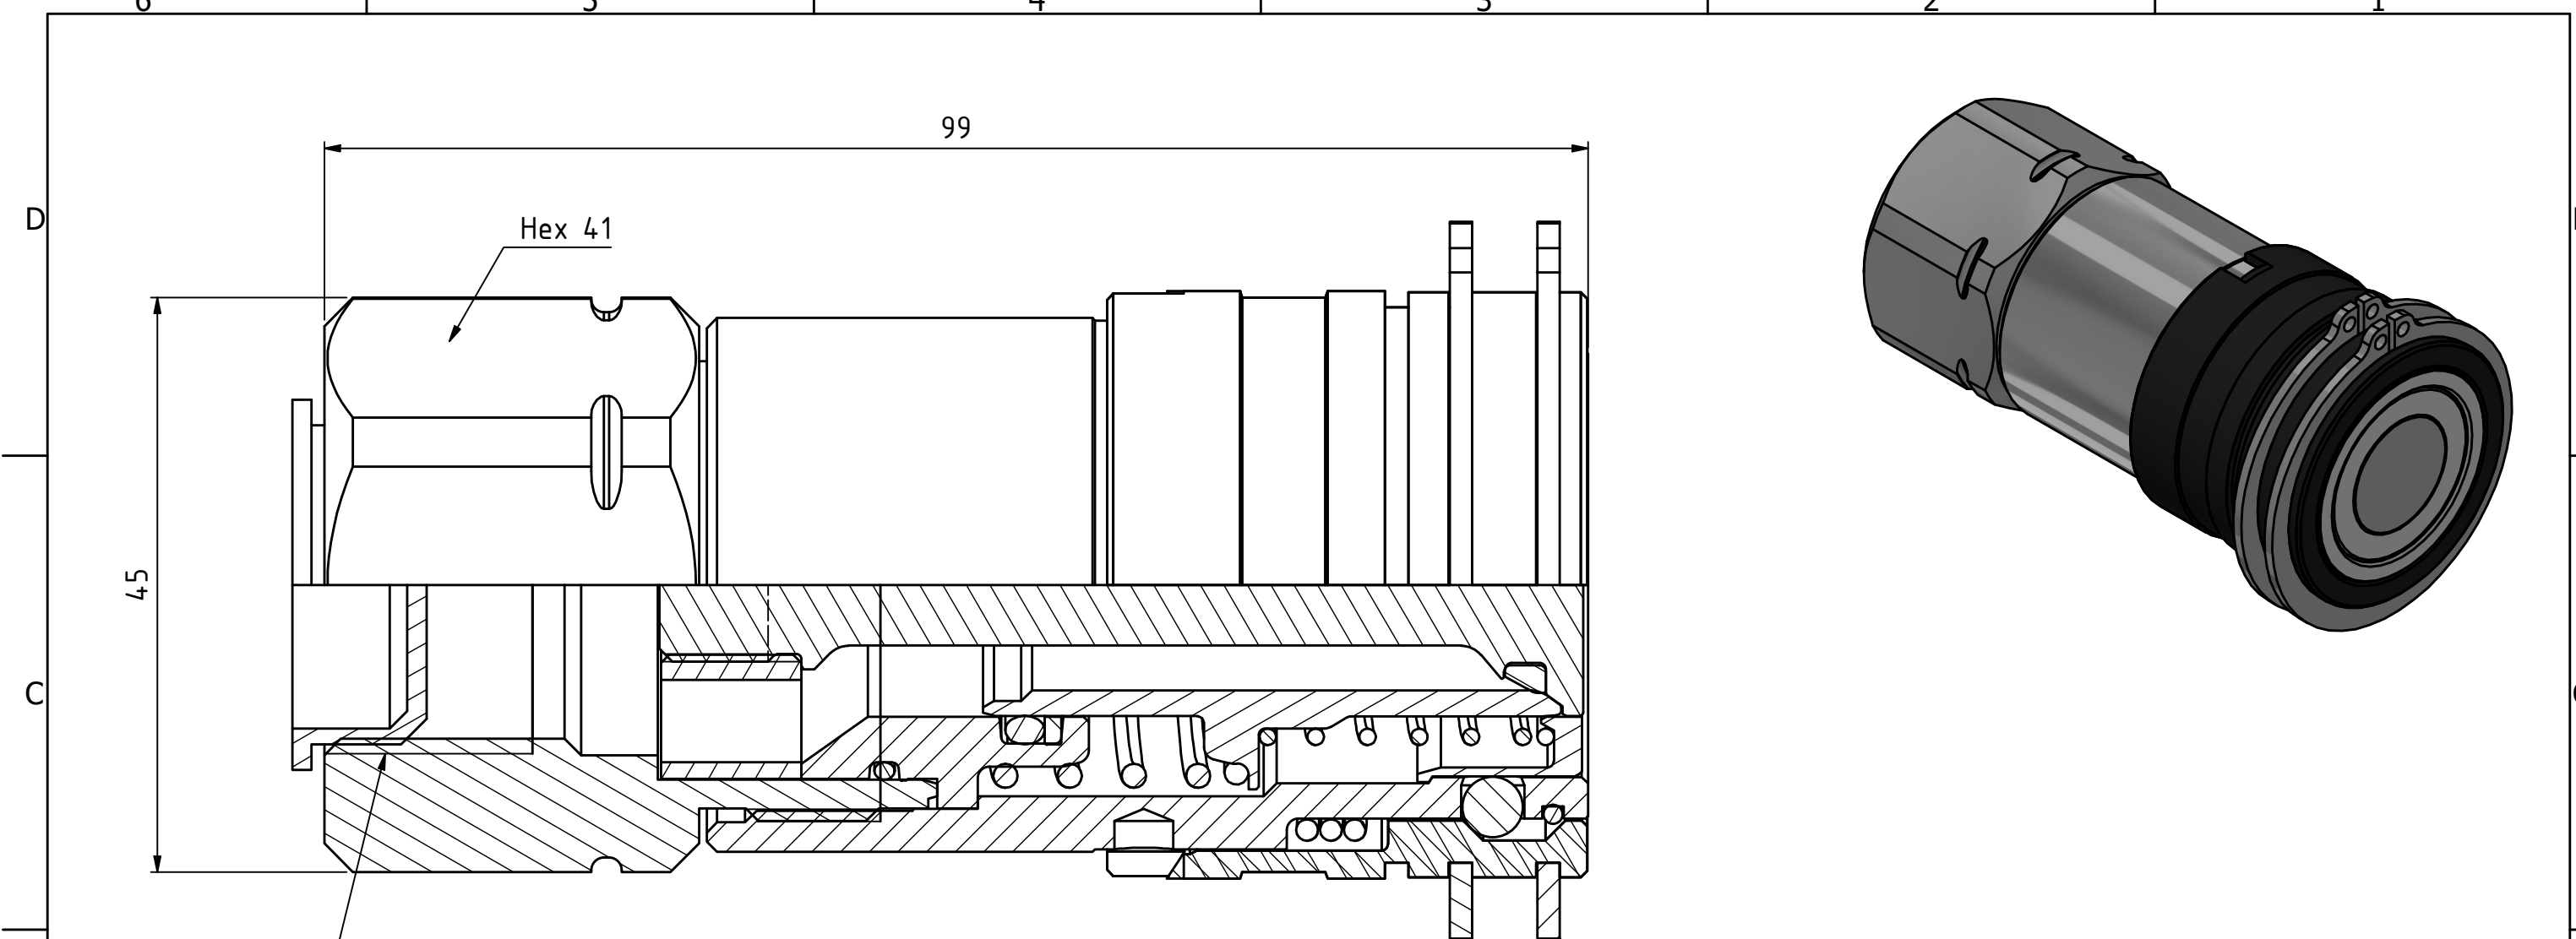

Product No. 107651281	
Nominal flow Ø DN:	19 mm
Connection Stroke:	21.5 mm
Max WP Connected:	400 bar
Max WP Disconnected:	400 bar
Min BP Connected:	1200 bar
Min BP Disconnected:	1200 bar
Temperature range:	-30°C - +100°C
Connection:	G 3/4" Fem
Sealing material:	NBR
Hexagon:	41

11	1	Thread protection	Plastic	099501364
10	1	Back part	Steel, Zn-Ni 9 transp	097657328
9	2	Retaining Ring SgA 46	Steel, Non Plated	099332623
8	1	Semi assembly Valve		097659005
7	1	Spring	Stainless Steel	097653100
6	1	Wire coil	Steel	097652600
5	1	Spring	Steel	097653201
4	1	Locking sleeve	Steel, Zn-Ni 10 black	097652520
3	15	Ball	Stainless steel	093554800
2	1	Ratchet sleeve	Steel, Zn-Ni	097653520
1	1	Front part	Steel, Zn-Ni 9 transp	097652020
Item	Qty	Description	Material	Part Number

State Production		Drawn PEOD	Checked JE	Approved PMB	Date 2024-03-08
	Coupling G 3/4" fem NBR with two Locking Rings.		ECO	Former No.	Scale 2 : 1
			Drawing No. 107651281		Issue A