

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©





A3

D

C

B

A

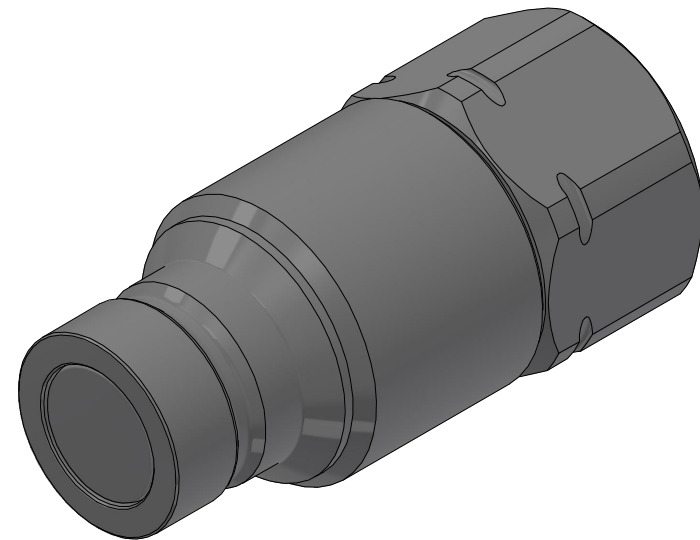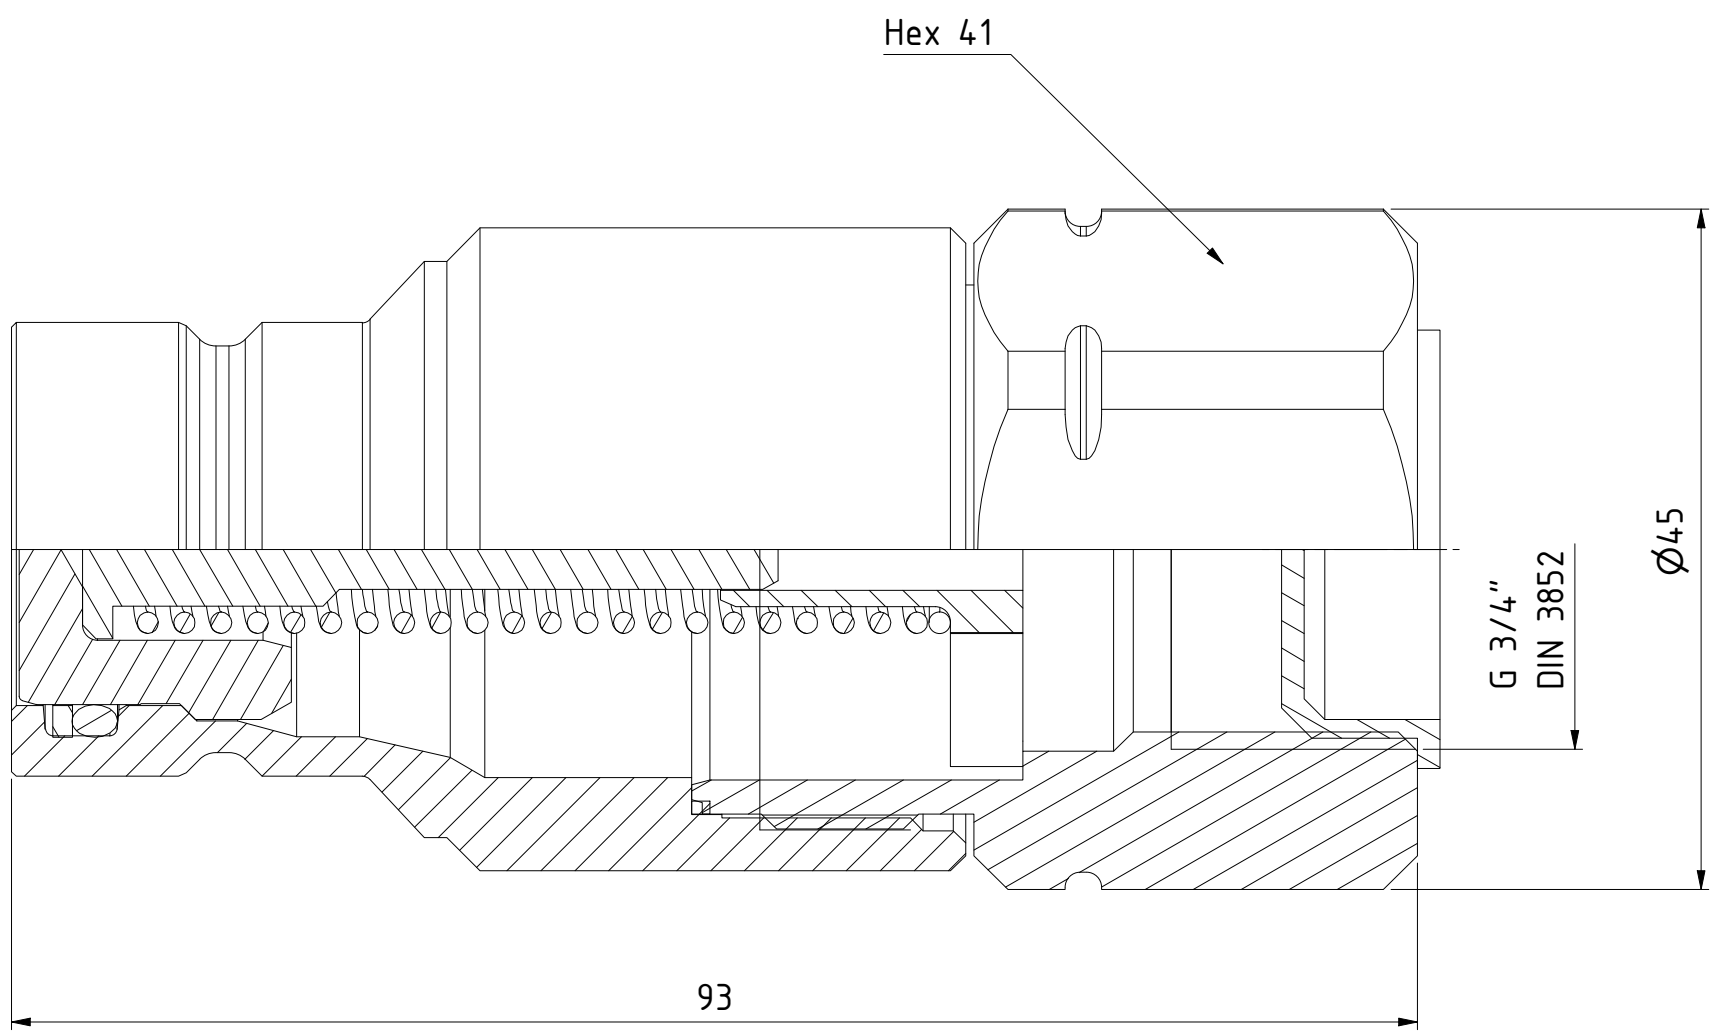

1 : 1

D

C

B

A

Product No. 107656211	
Nominal flow Ø DN:	19 mm
Connection Stroke:	mm
Max WP Connected:	400 bar
Max WP Disconnected:	400 bar
Min BP Connected:	1200 bar
Min BP Disconnected:	1200 bar
Temperature range:	-20°C - +205°C
Connection:	G 3/4" Fem
Sealing material:	FPM

11	1	Nipple body	Steel	097652320
10	1	Flat seal	PTFE	097654601
9	1	O-ring	FPM	096672811
8	1	Backup ring	PTFE	097655601
7	1	Back part	Steel, Zn-Ni 9 transp	097657328
6	1	Thread protection	Plastic	099501364
5	1	Spring	Stainless Steel	097653250
4	1	Valve stop	Brass	097653950
3	1	Pin	Steel	097654500
2	1	Valve	Steel, Plated	097653050
Item	Qty	Description	Material	Part Number
State		Drawn	Checked	Approved
Production		CABPEOD	JE	PMB
		ECO		Date
		Former No.		2024-03-08
			Scale	
			2 : 1	
			Drawing No.	Issue
			107656211	A
			Sheet	1 /(1)



Nipple G 3/4" Fem FPM

107656211