


Denna handling får ej utan vårt medgivande delges annan, kopieras eller eljest obehörigen användas.
Övertiðelse hvaríð beivras með stíð av gálande lag.
This document must not be copied, either completely or in part, without permission.
Any infringement will have legal consequences.

Diese Zeichnung darf weder ganz noch teilweise ohne unsere ausdrückliche Genehmigung kopiert oder auf andere Weise vervielfältigt werden.
Genehmigung kopiert oder auf andere Weise vervielfältigt werden.
werden. Zuwiderhandlungen werden gerichtlich verfolgt.
Alle r  tigketer f  beh  lts.
All rights reserved.
Alle rechte vorbehalten.

Product no: 10_765_6403		
Max working pressure:	400	bar connected
	400	bar disconnected
Min burst pressure:	1000	bar connected
	1000	bar disconnected
Sealing material:	NBR/PUR	
Temperatur range:	-30�C - 100 �C	
Nominal flow diameter,DN:	19	mm
Connection	1'' NPT Fem	
Connection stroke:	21.5	mm

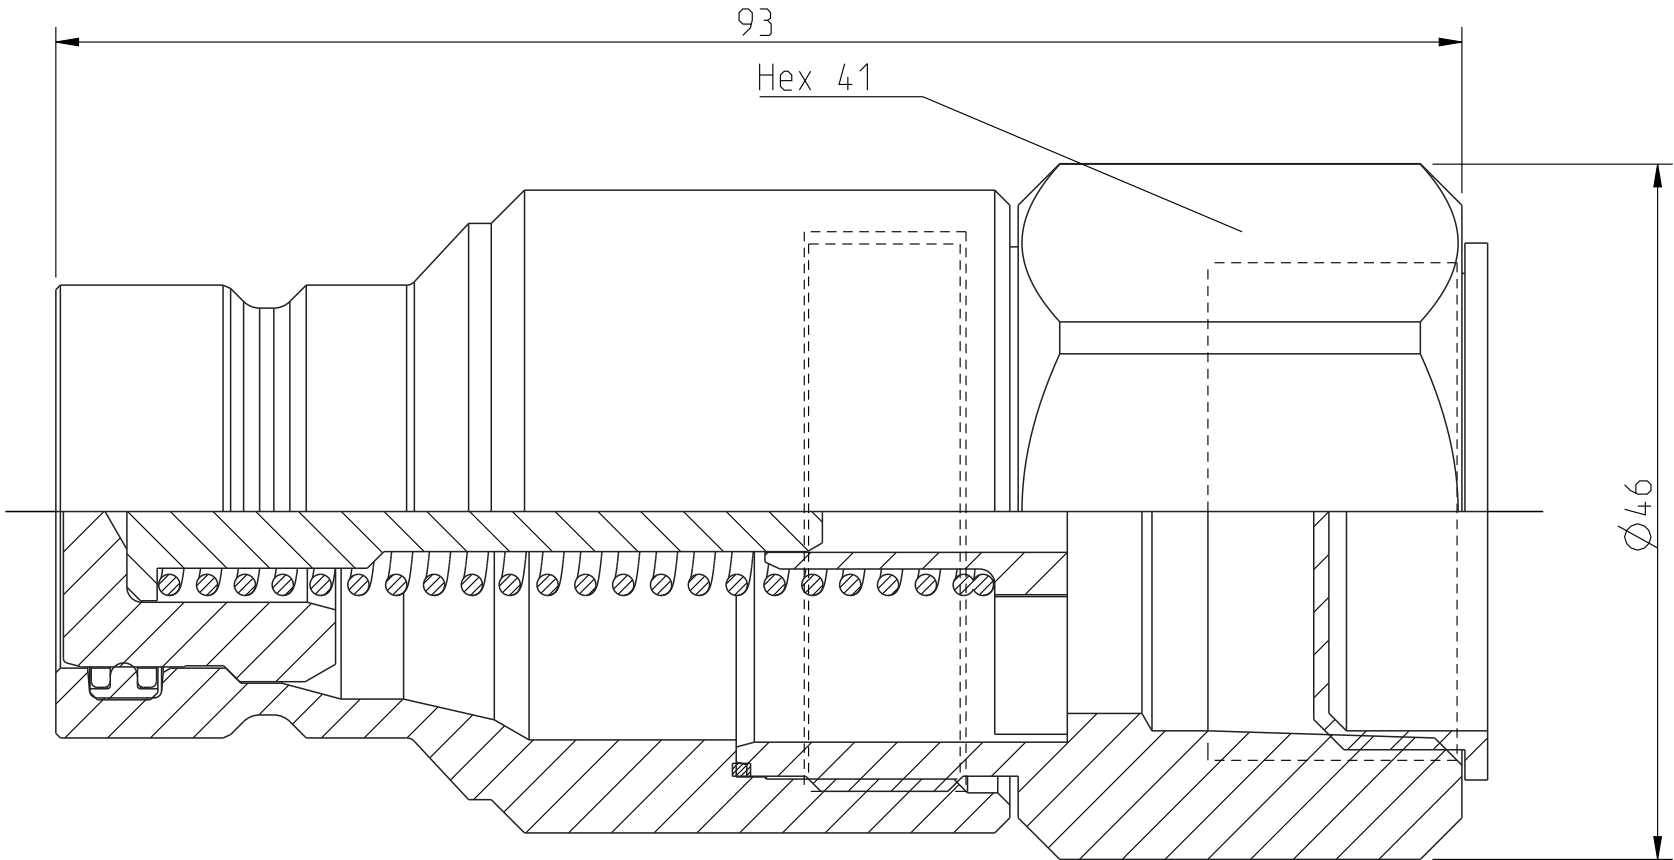

10	1	Valve stop	Brass
9	1	Valve	Steel, Plated
8	1	Thread protection	Plastic
7	1	Spring	Steel
6	1	Sealing	NBR
5	1	Pin	Steel
4	1	Nipple body	Steel, Zn-Ni 9 transp
3	1	Flat seal	Plastic
2	2	Back-up	POM
1	1	Back part	Steel, Zn-Ni 9 transp
Detalj Item	Antal Quant.	Ben��mning Description	Material Material

	Skala Scale	2:1	Rit��d Drawn	C ABJOSC	Kontr. Checked	-	Godk. Appr.	-	��m nr. Alt. no.	-	Dat. Date	15-03-20
	Assembly drawing		Ritning nr/Drawing No.				50_765_6403		Utg./Issue			AC