


Alta rättigheter förbehålls.
All rights reserved.
Alle Rechte vorbehalten.

Diese Zeichnung darf weder ganz noch teilweise ohne unsere ausdrückliche Genehmigung kopiert oder auf andere Weise vervielfältigt werden.
werden. Zuwiderhandlungen werden gerichtlich verfolgt.

Denna handling får ej utan vårt medgivande delges annan, kopieras eller eljest obehörigen användas.
Övertredelse härvid beivras med stöd av gällande lag.
This document must not be copied, either completely or in part, without permission.
Any infringement will have legal consequences.

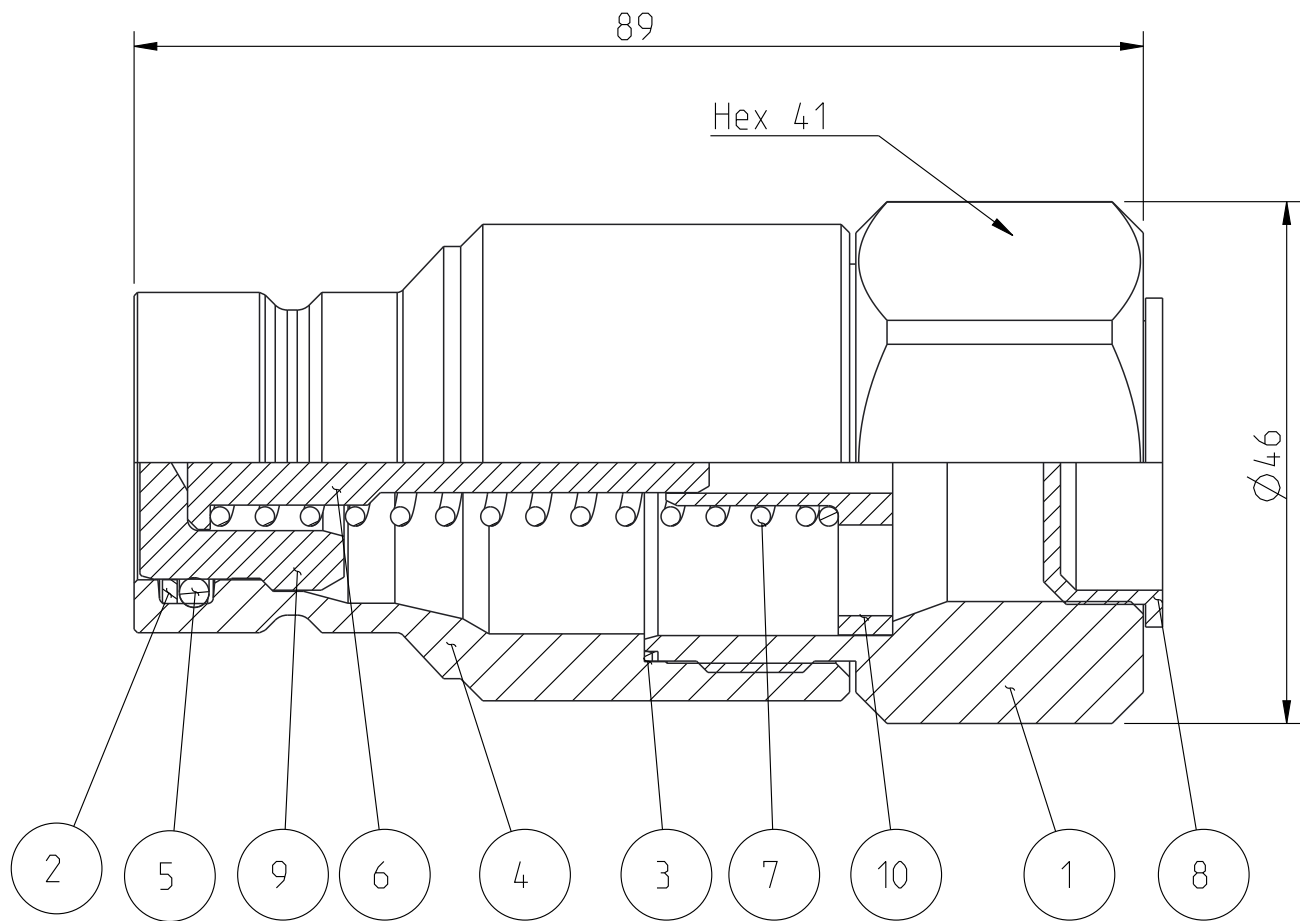

Product no: 10_766_6211		
Max working pressure:	250	bar connected
	250	bar disconnected
Min burst pressure:	1000	bar connected
	1000	bar disconnected
Sealing material:	FPM	
Temperatur range:	-20°C - +205 °C	
Nominal flow diameter,DN:	19	mm
Connection	G 3/4" Fem	
Connection stroke:	21.5	mm

10	1	Valve stop	Acid-proof steel
9	1	Valve	Acid-proof steel
8	1	Thread protection	Plastic
7	1	Spring	Stainless steel
6	1	Pin	Acid-proof steel
5	1	O-ring	FPM
4	1	Nipple body	Acid-proof steel
3	1	Flat seal	PTFE
2	1	Backup ring	PTFE
1	1	Back part	Acid-proof steel
Detalj Item	Antal Quant.	Benämning Description	Material Material

	Skala Scale	3:2	Ritad Drawn	CABJOER	Kontr. Checked	JoEr	Godk. Appr.	PMB	Äm nr. Alt. no.	-	Dat. Date	13-06-26
	Assembly drawing						Ritning nr/Drawing No.			Utg./Issue		
						50_766_6211			AB			