

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©

A3

D

C

B



A

D


C

B

A

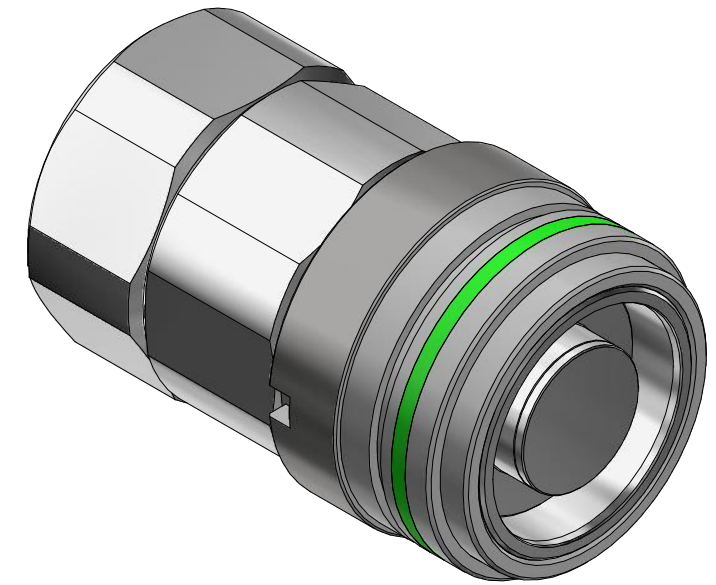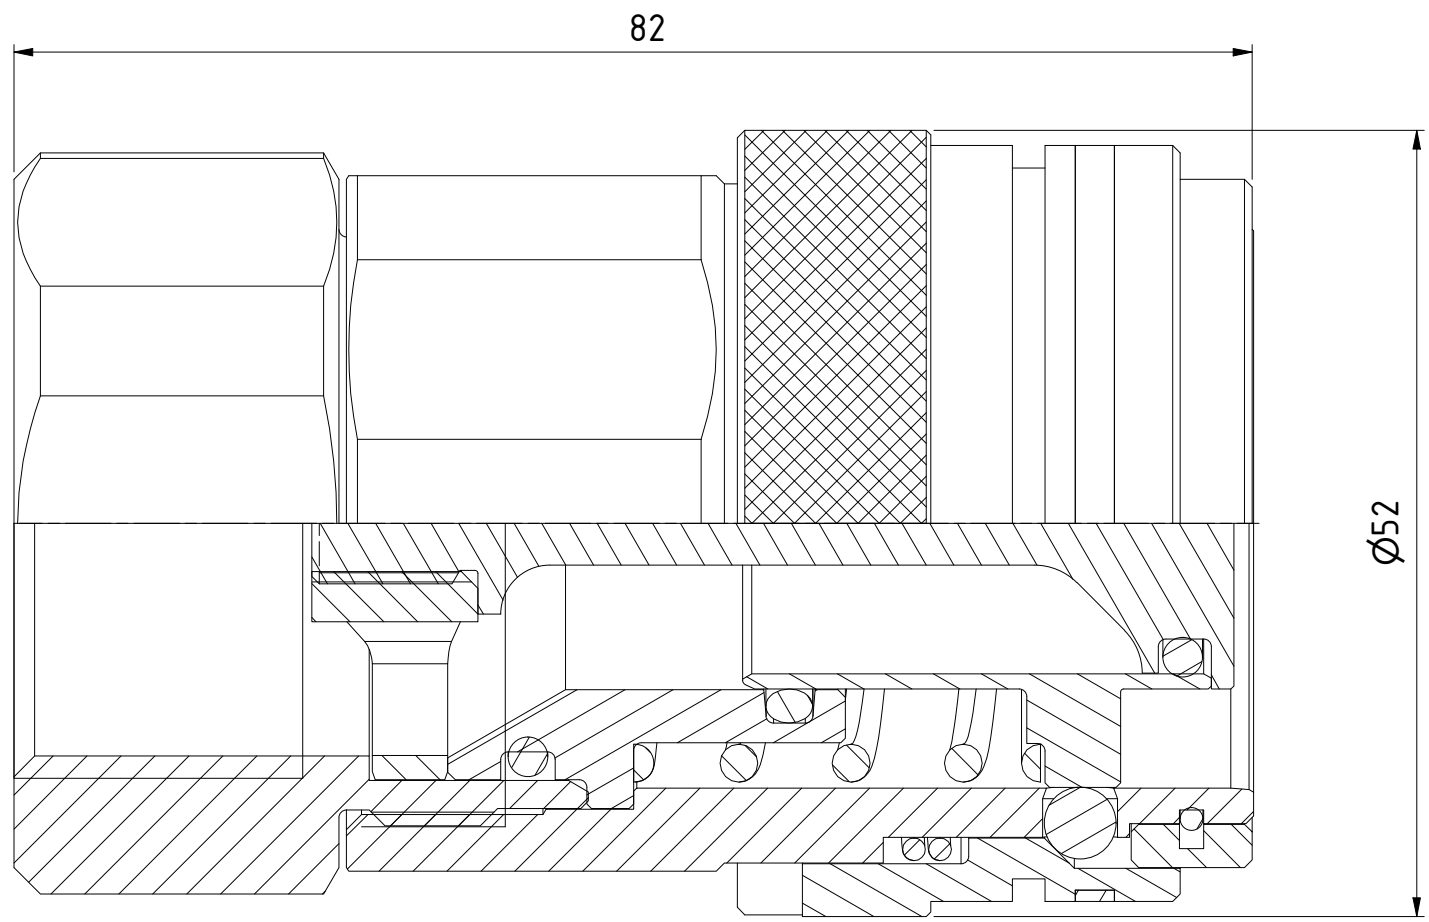

Product No. 107671200	
Nominal flow Ø DN:	19 mm
Connection Stroke:	19,8 mm
Max WP Connected:	20 bar
Max WP Disconnected:	20 bar
Min BP Connected:	80 bar
Min BP Disconnected:	80 bar
Temperature range:	-15°C - +100°C
Connection:	1" BSP
Sealing material:	NBR
Hexagon:	46

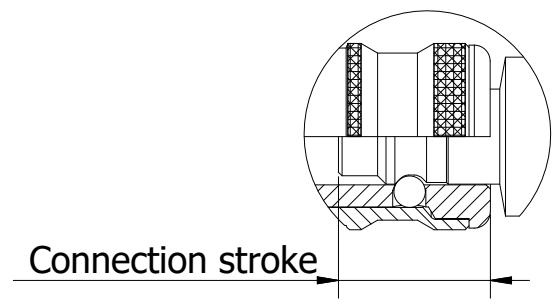

9.8	1	O-ring	NBR
9.7	1	Valve seat	Brass, CuNi5b
9.6	1	O-ring	NBR
9.5	1	O-ring	NBR
9.4	1	Spring	Acid-proof steel
9.3	1	Valve sleeve	Brass , CuNi5b
9.2	1	Valve pin	Brass, CuNi5b
9.1	1	Stop for valve	Acid proof steel
8	1	Checking ring	Plastic, Green
7	1	Stop flange	Brass, CuNi5b
6	12	Ball	Stainless steel
5	1	Locking sleeve	Brass, CuNi5b
4	1	Spring	Stainless steel
3	1	Wire coil	Acid-proof steel
2	1	Adaptor	Brass, CuNi5b
1	1	Coupling body	Brass, CuNi5b
Item	Qty	Description	Material
		Scale 2 : 1	Drawn CABMBA
		Checked JOER	Appr. PMB
		ECO 000871	Date 2021-03-10
		Drawing No. 507671200	Issue AC
		Sheet 1 /(1)	