

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B



A

D

C

B

A

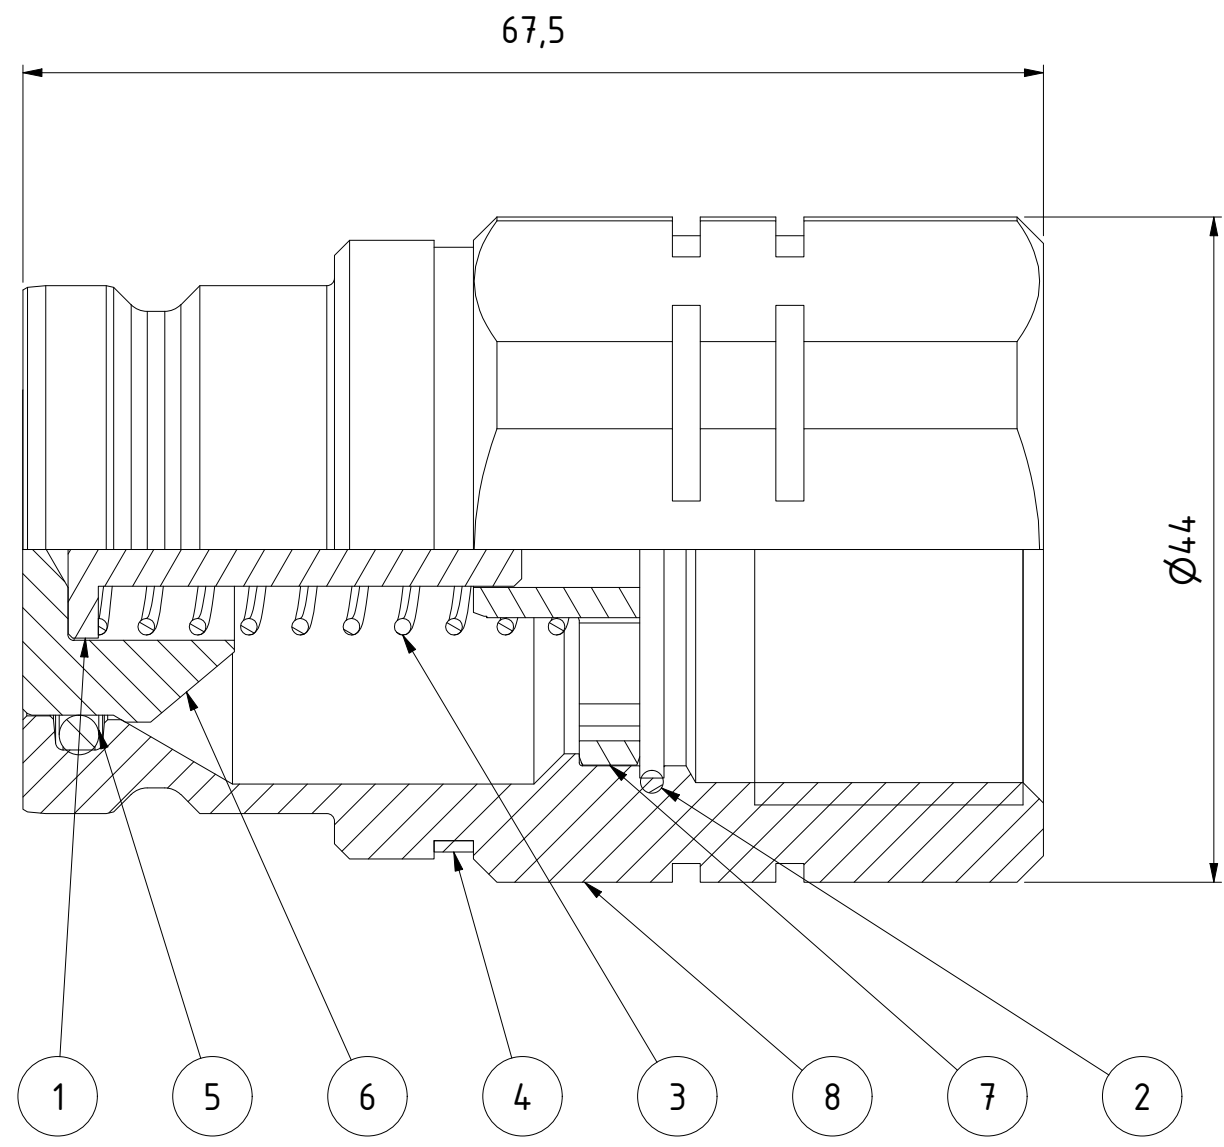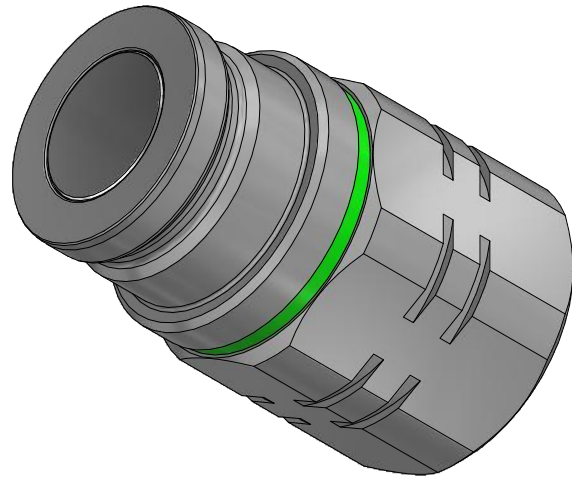

Product No. 107676220	
Nominal flow Ø DN:	19 mm
Connection Stroke:	mm
Max WP Connected:	20 bar
Max WP Disconnected:	20 bar
Min BP Connected:	80 bar
Min BP Disconnected:	80 bar
Temperature range:	-20°C - +150°C
Connection:	G 1" female
Sealing material:	EPDM
Hexagon:	41

8	1	Nipple body	Brass, Ni5b										
7	1	Stop for valve	Acid proof steel										
6	1	Valve	Brass, Ni5b										
5	1	O-ring	EPDM										
4	1	Checking ring	Plastic, Green										
3	1	Spring	Stainless steel										
2	1	Wire coil	Acid-proof steel										
1	1	Valve pin	Brass, CuNi5b										
Item	Qty	Description		Material									
	Scale	2 : 1	Drawn	Cabalsj	Checked	CABMBA	Appr.	PMB	ECO	12728	Date	2020-02-18	
	Assembly Drawing					507676220					Issue	AB	Sheet