
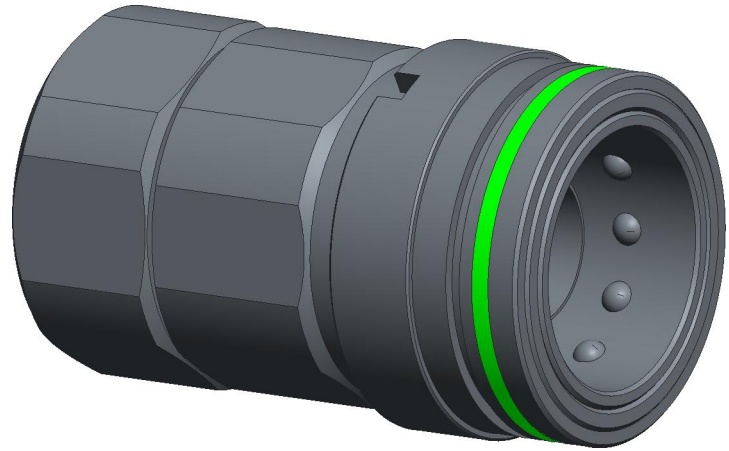
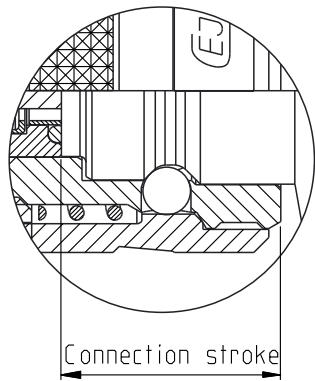


Product no: 10_777_0210		
Max working pressure:	20	bar connected bar disconnected
Min burst pressure:	80	bar connected - bar disconnected
Sealing material:	FPM	
Temperatur range:	-5 ��C - 205 ��C	
Nominal flow diameter,DN:	19 mm	
Connection	G 1" Female	
Connection stroke:	19.8 mm	

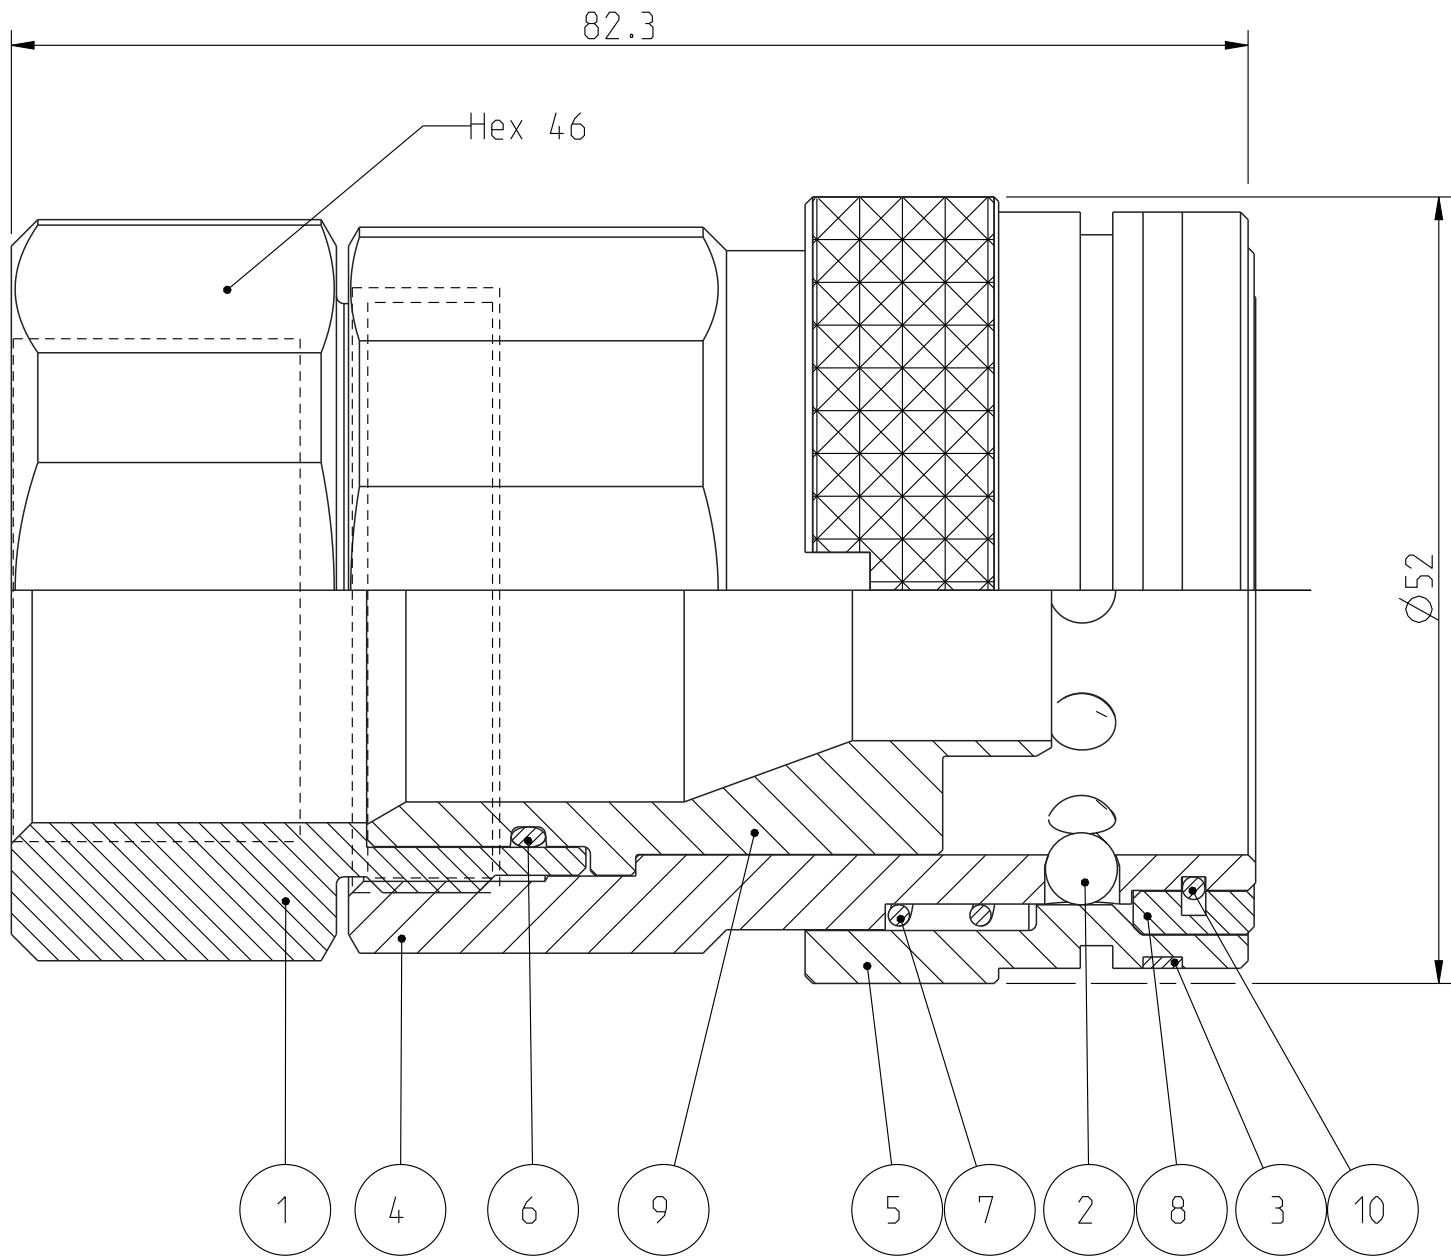

1:1

10	1	Wire coil	Acid-proof steel
9	1	Valve sleeve	Acid-proof steel
8	1	Stop flange	Acid-proof steel
7	1	Spring	Stainless steel
6	1	O-ring	FPM
5	1	Locking sleeve	Acid proof steel
4	1	Coupling body	Acid-proof steel
3	1	Checking ring	Plastic, Green
2	12	Ball	Stainless steel
1	1	Adaptor	Acid-proof steel
Detalj Item	Antal Quant.	Ben��mning Description	Material Material

	Skala Scale	2:1	Ritad Drawn	PGU	Kontr. Checked	JOOL	Godk. Appr.	MAH	AM nr. Alt. no.	10878	Dat. Date	140818
	Assembly drawing						Ritning nr/Drawing No.			50_777_0210	Utg./Issue	