



This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©

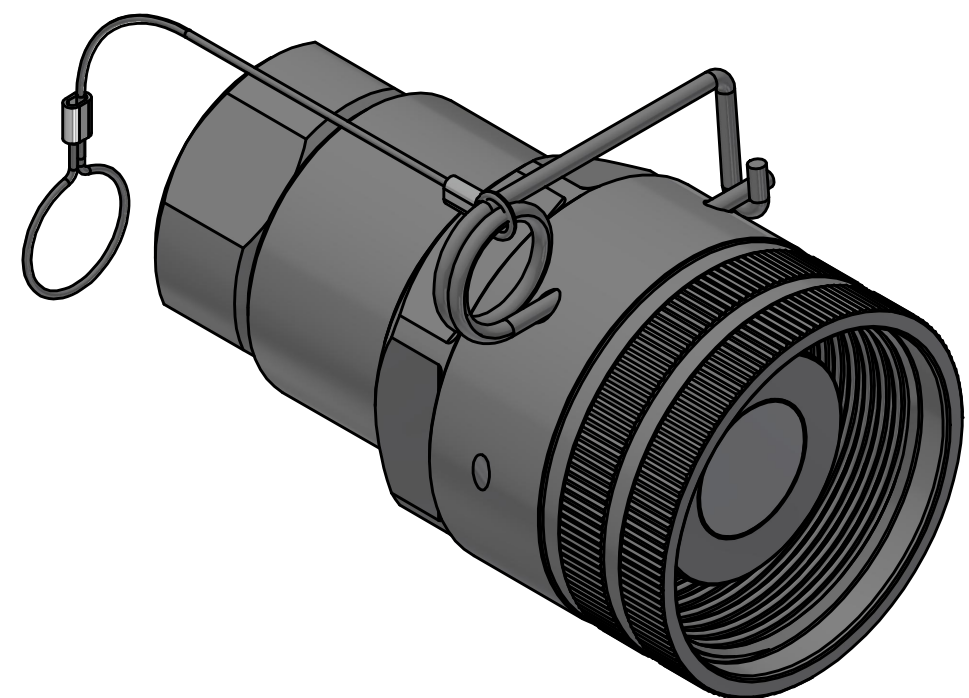

D
C
B
A

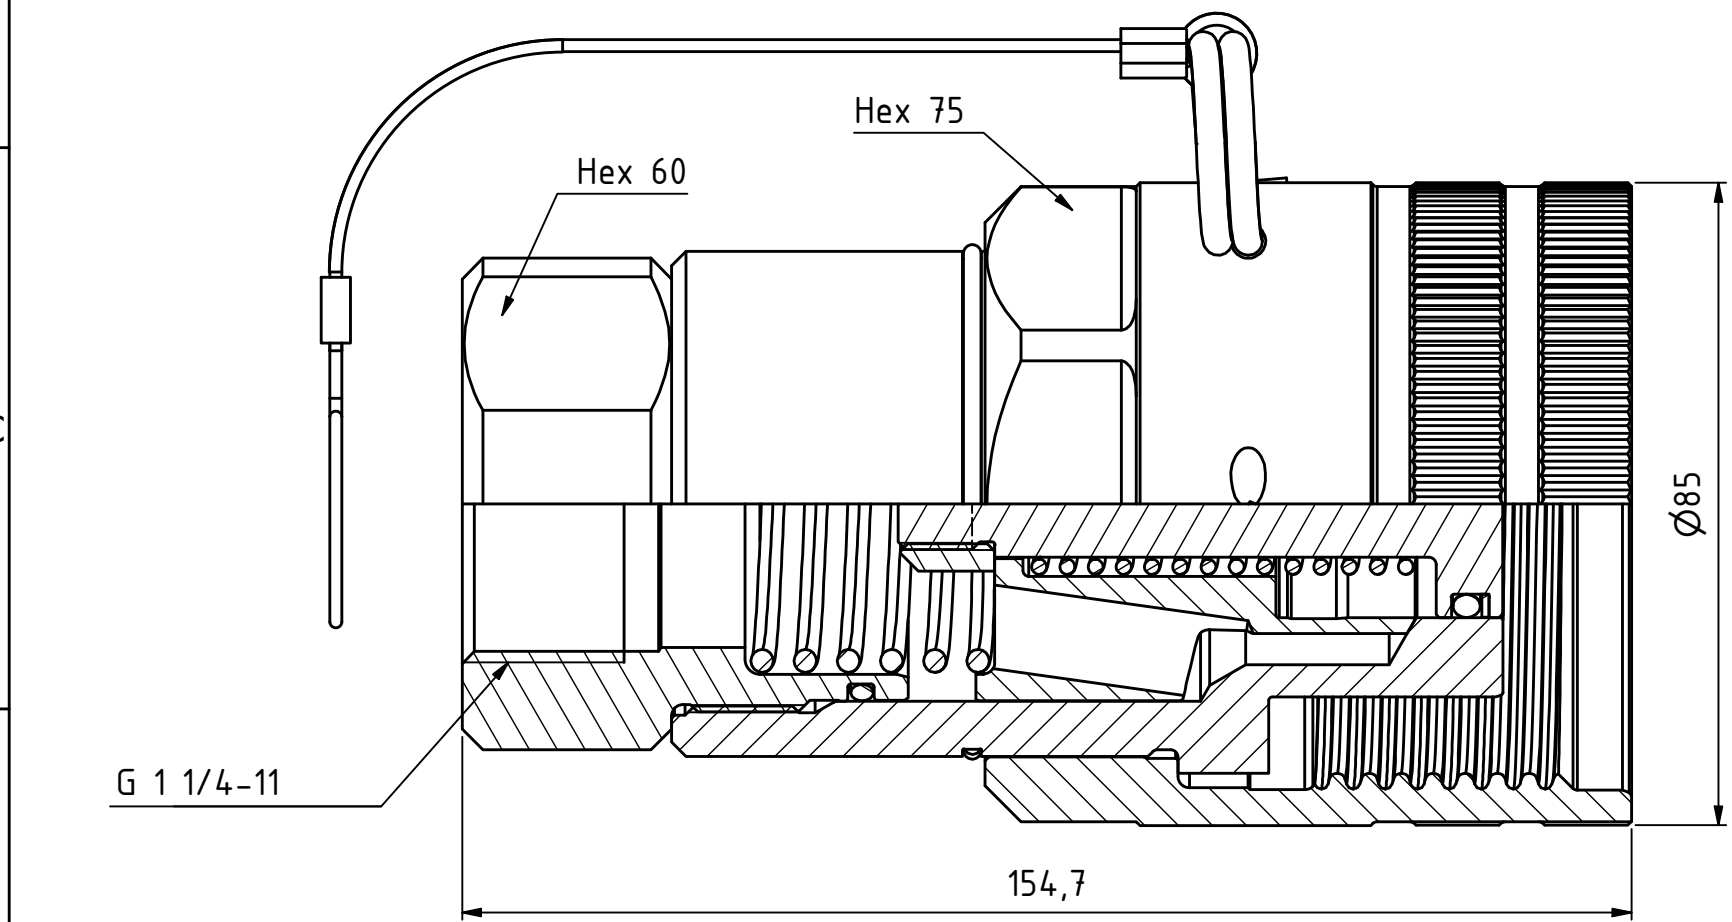

D
C
B
A

Product No. 108076204	
Nominal flow Ø DN:	mm
Connection Stroke:	mm
Max WP Connected:	420 bar
Max WP Disconnected:	400 bar
Min BP Connected:	1680 bar
Min BP Disconnected:	1000 bar
Temperature range:	-30°C - +100°C
Connection:	G 1 1/4" fem
Sealing material:	NBR
Hexagon:	

8	1	Semi Assembly Valve		098079002
7	1	Semi A. - Sprint and wire		098079004
6	1	Wire coil	Stainless steel	098072600
5	1	O-ring	NBR	098072801
4	1	Back part	Steel, Plated	098077324
3	1	Spring	Stainless steel	098073250
2	1	Locking Sleeve TLX	Steel, Plated	098072599
1	1	Nipple Body	Steel, Plated	098072300
Item	Qty	Description	Material	Part Number
	Scale	Drawn	Checked	Appr.
	1 : 1	CABPEOD		ECO
	Assembly Drawing			Drawing No.
	108076204			
		Date	Issue	Sheet
		2016-06-02	E	1 /(1)