

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B



A

D

C

B

A

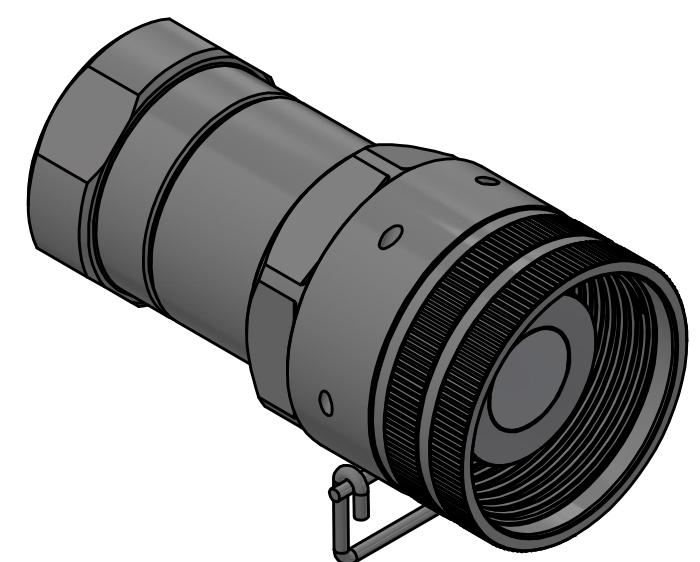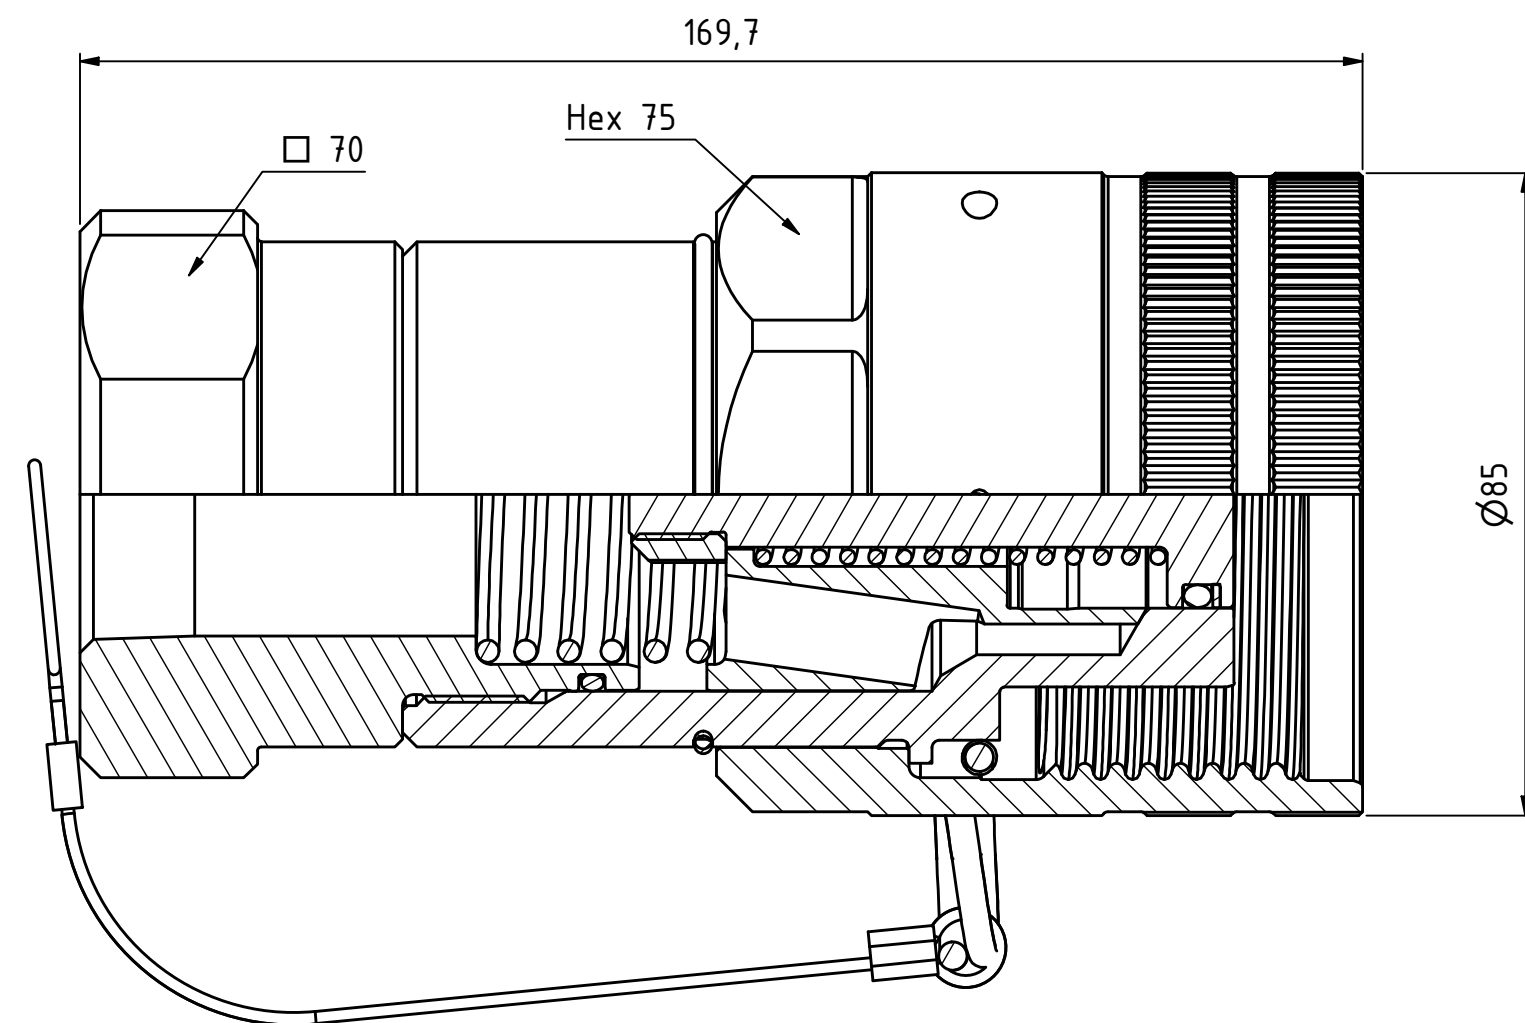

Product No. 108076404	
Nominal flow Ø DN:	mm
Connection Stroke:	mm
Max WP Connected:	420 bar
Max WP Disconnected:	400 bar
Min BP Connected:	1680 bar
Min BP Disconnected:	1000 bar
Temperature range:	-30°C - +100°C
Connection:	1 1/4" NPT fem
Sealing material:	NBR
Hexagon:	

8	1	Semi A. - Sprint and wire		098079004
7	1	Semi Assembly Valve		098079002
6	1	Wire coil	Stainless steel	098072600
5	1	O-ring	NBR	098072801
4	1	Back part	Steel, Plated	098077344
3	1	Spring	Stainless steel	098073250
2	1	Locking Sleeve TLX	Steel, Plated	098072599
1	1	Nipple Body	Steel, Plated	098072300
Item	Qty	Description	Material	Part Number
		Scale 1 : 1	Drawn CABJOER	Checked
		Appr.		ECO
		Date 2019-01-30		Issue
		Drawing No. 108076404		Sheet 1 /(1)
		D		



Assembly Drawing 108076404