

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©





A3

D

C

B

A

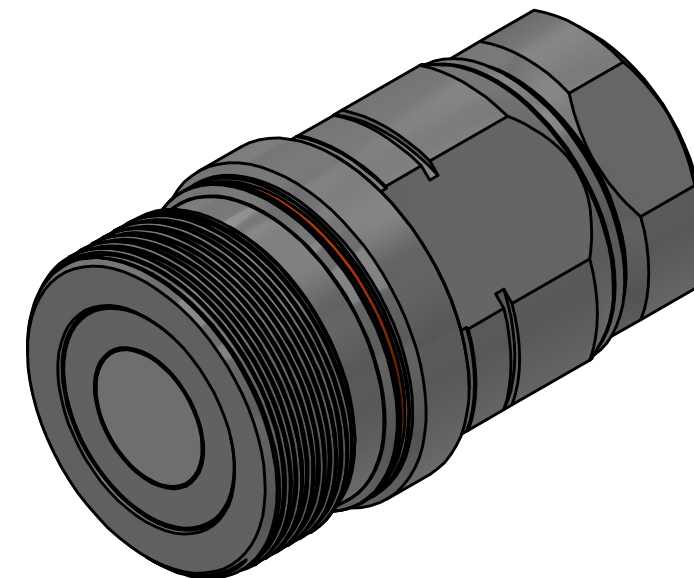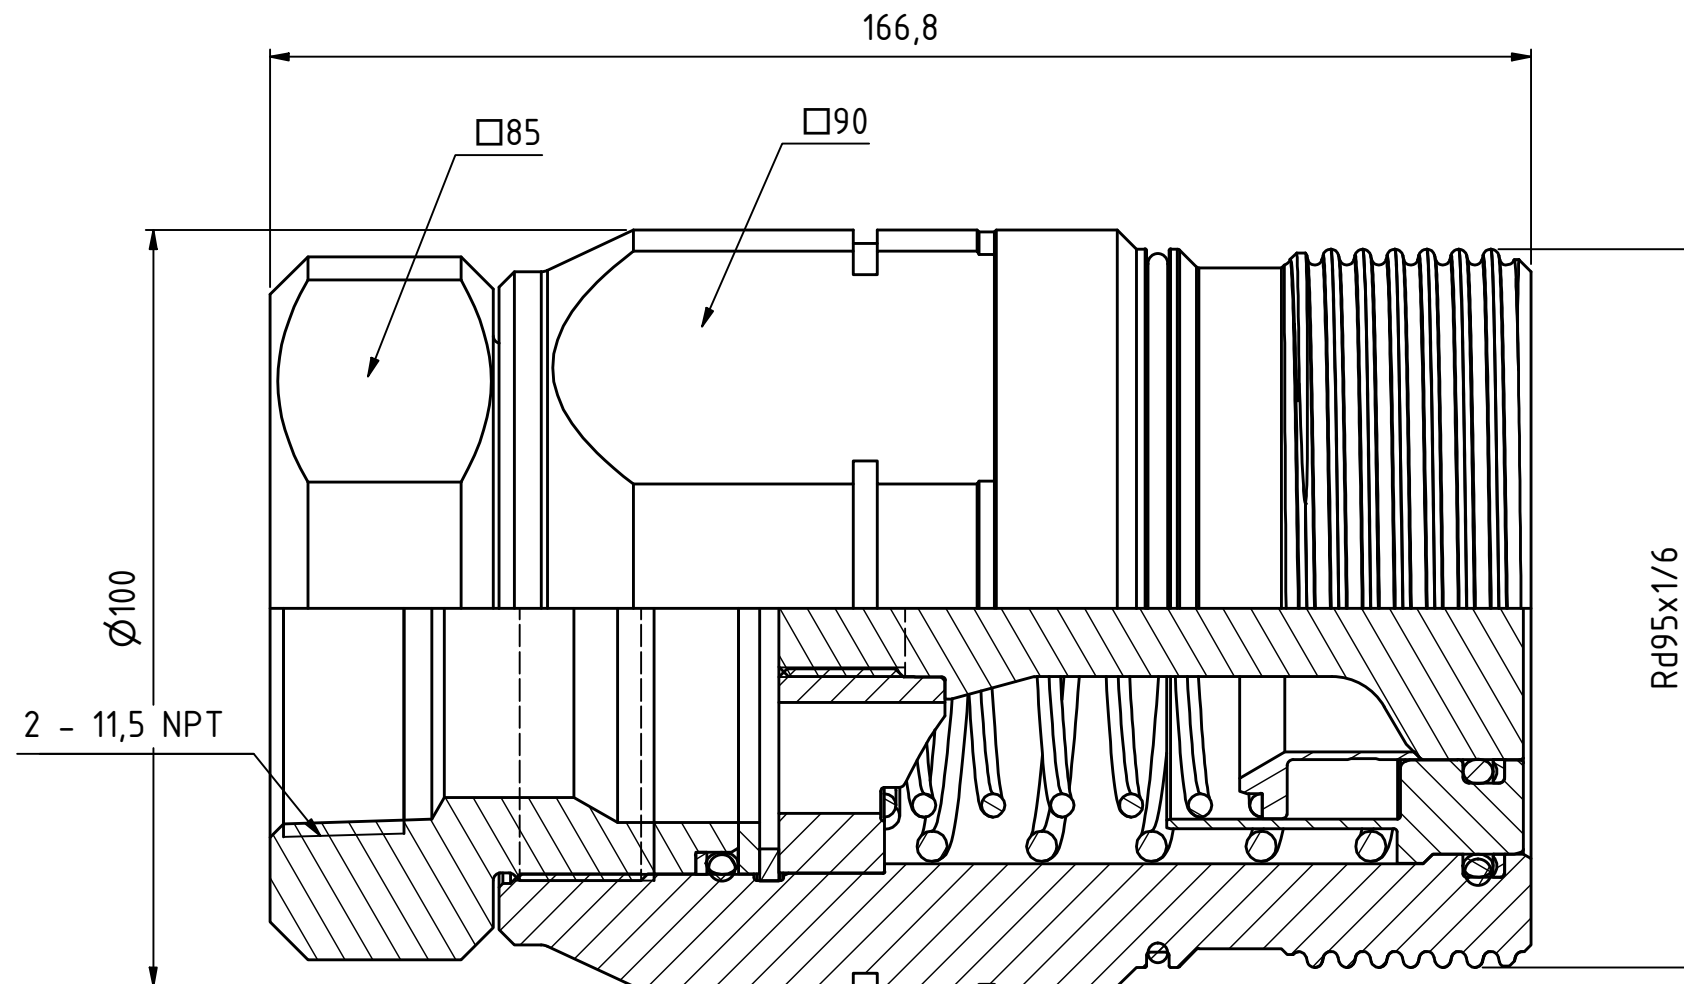

1 : 2

Product No. 109071407	
Nominal flow Ø DN:	32 mm
Connection Stroke:	mm
Max WP Connected:	380 bar
Max WP Disconnected:	380 bar
Min BP Connected:	1520 bar
Min BP Disconnected:	1000 bar
Temperature range:	-30°C - +120°C
Connection:	2" NPT
Sealing material:	HNBR
Hexagon:	

14	1	O-ring	HNBR
13	1	O-ring	HNBR
12	1	O-ring	HNBR
11	1	Back part	Steel, Zn-Ni transp
10	1	Back-up	PTFE
9	1	O-ring	NBR
8	1	Back-up ring	PTFE+Bronze
7	1	Back-up ring	PTFE+Bronze
6	1	Retaining ring	Steel
5	1	Washer	Steel
4	1	Semi A. valve package	
3	1	Spring	Steel
2	1	Valve	Steel, Zn-Ni transp.
1	1	Coupling body	Hardened steel, Zn-Ni
Item	Qty	Description	Material

State	Drawn	Checked	Approved	Date
Production	CABANUN	PESV	JOER	2024-06-05
 Coupling TLX 1 1/2" - 2" NPT fem HNBR		ECO	Former No.	Scale
		001683		1 : 1
Drawing No.			Issue	Sheet
109071407			B	1 /(1)