


This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©

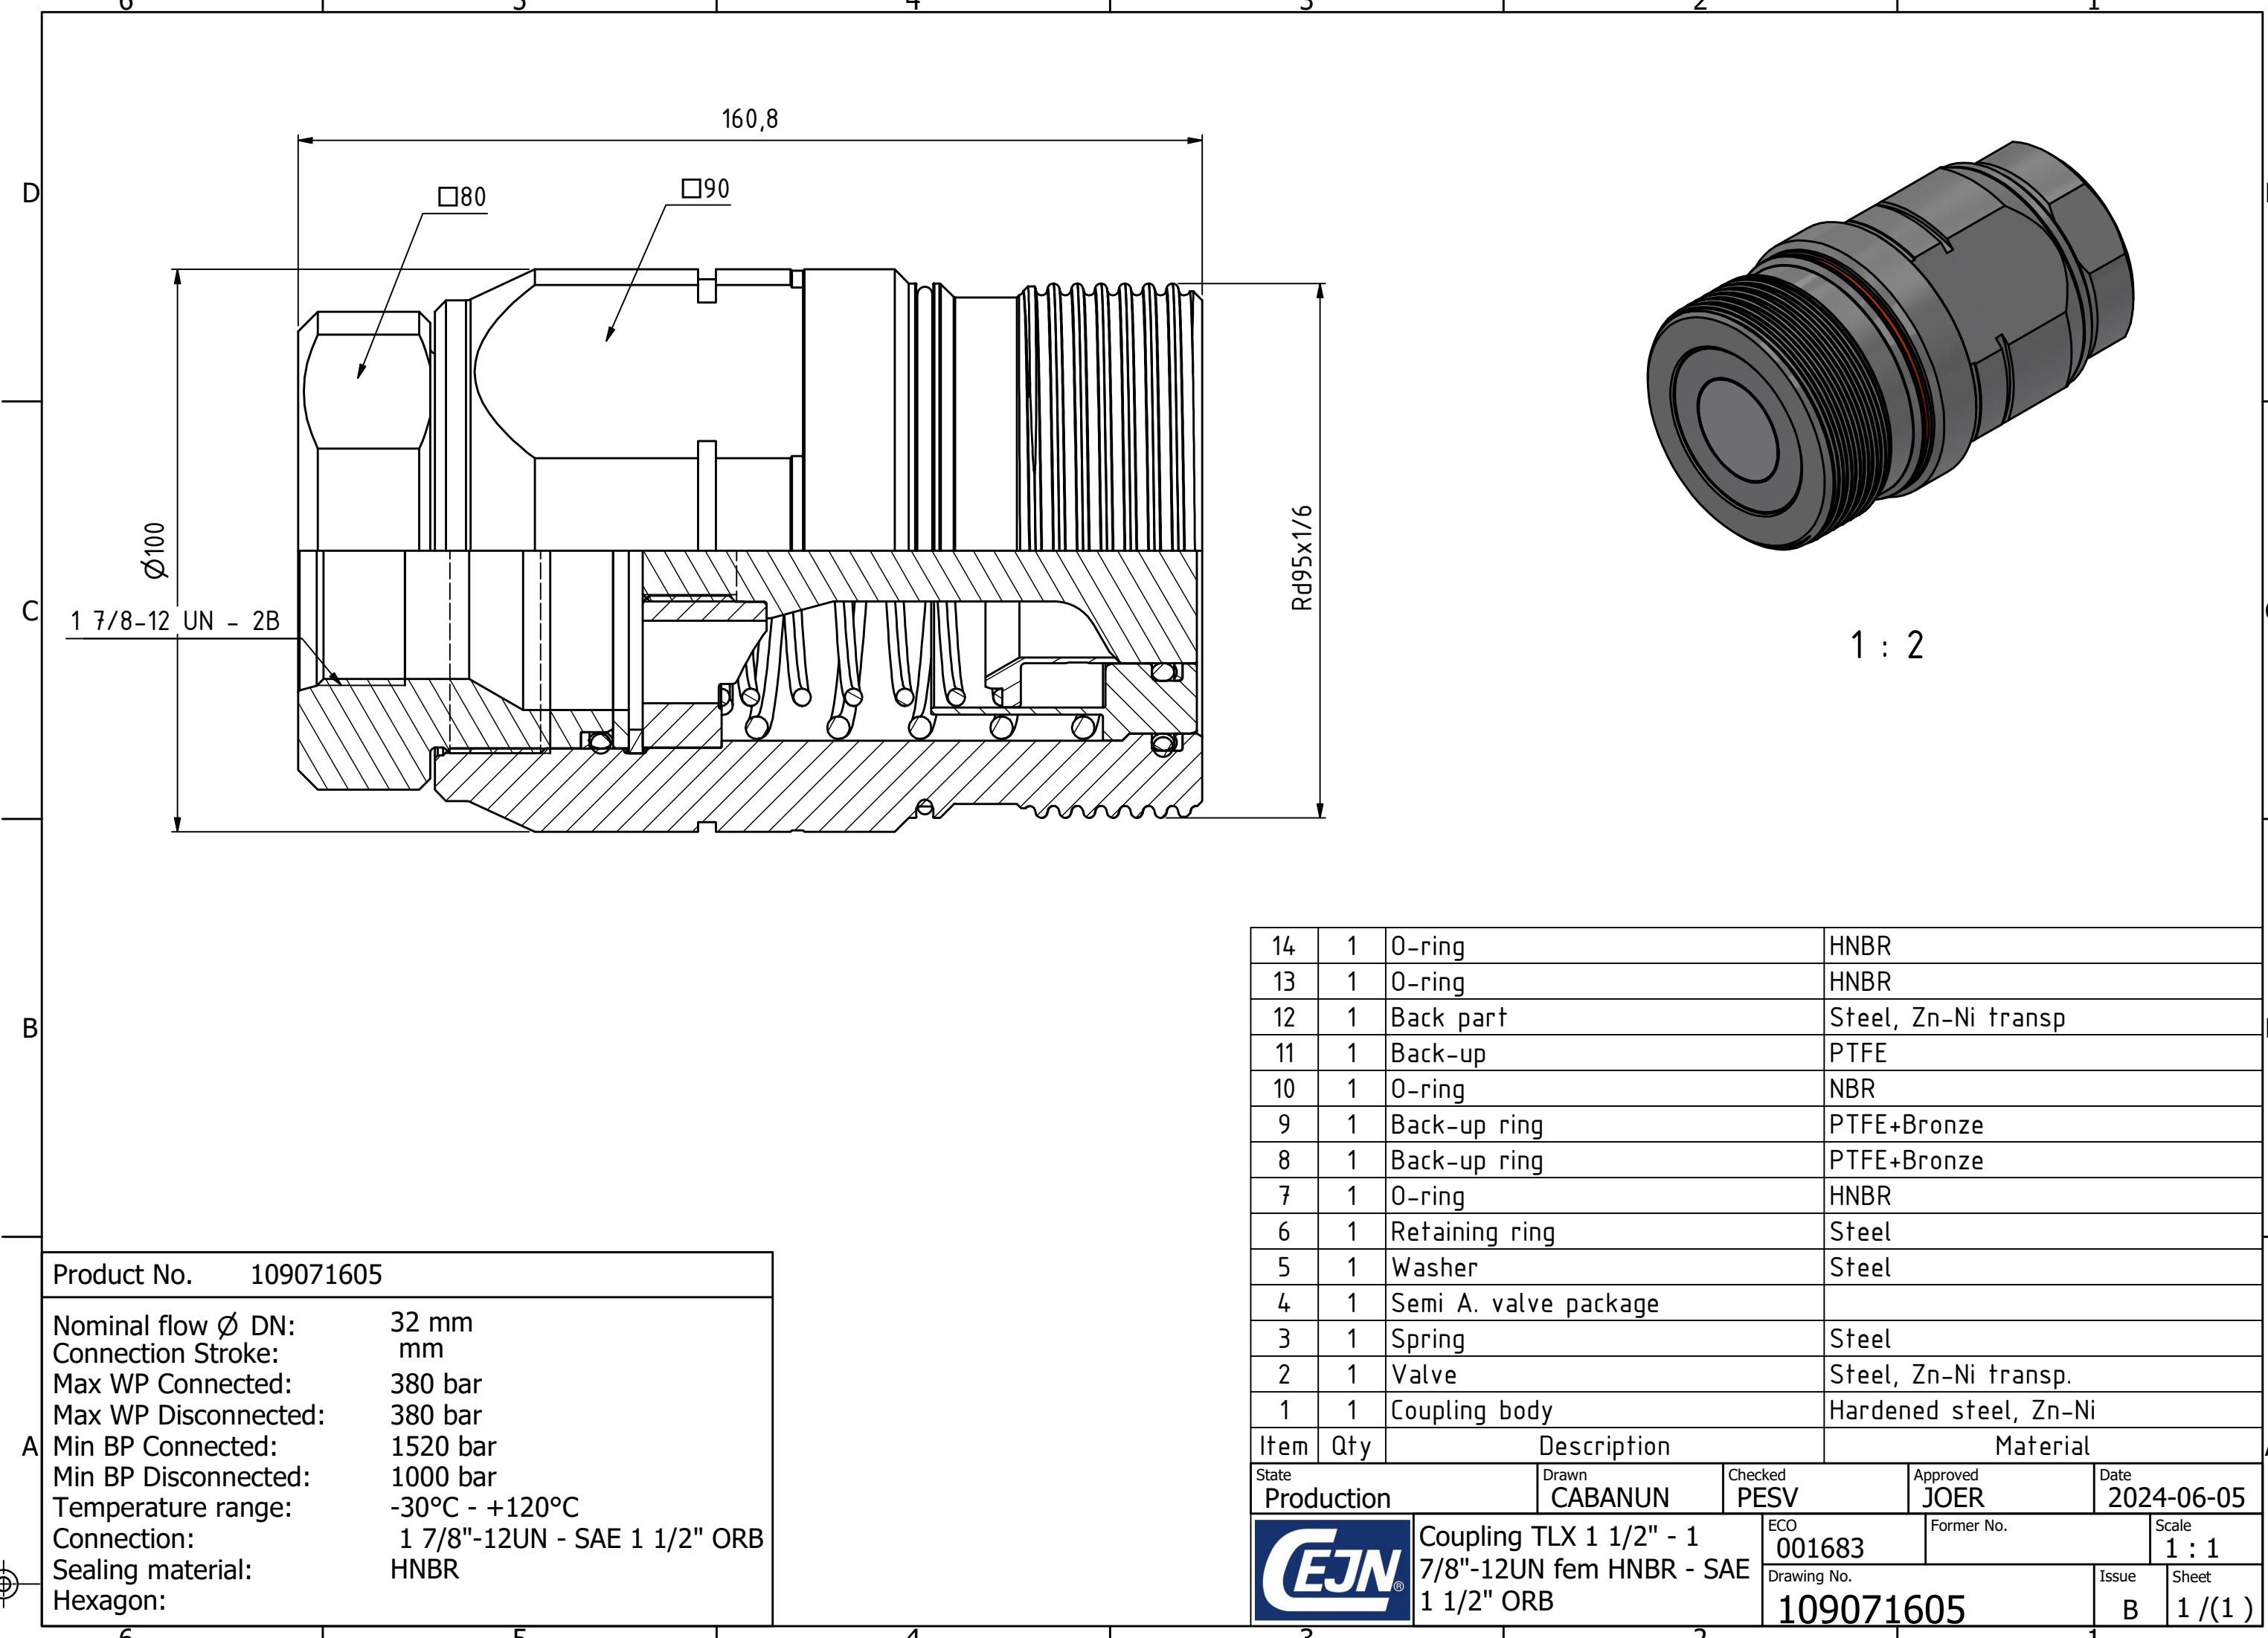

Product No. 109071605	
Nominal flow Ø DN:	32 mm
Connection Stroke:	mm
Max WP Connected:	380 bar
Max WP Disconnected:	380 bar
Min BP Connected:	1520 bar
Min BP Disconnected:	1000 bar
Temperature range:	-30°C - +120°C
Connection:	1 7/8"-12UN - SAE 1 1/2" ORB
Sealing material:	HNBR
Hexagon:	

14	1	O-ring	HNBR			
13	1	O-ring	HNBR			
12	1	Back part	Steel, Zn-Ni transp			
11	1	Back-up	PTFE			
10	1	O-ring	NBR			
9	1	Back-up ring	PTFE+Bronze			
8	1	Back-up ring	PTFE+Bronze			
7	1	O-ring	HNBR			
6	1	Retaining ring	Steel			
5	1	Washer	Steel			
4	1	Semi A. valve package				
3	1	Spring	Steel			
2	1	Valve	Steel, Zn-Ni transp.			
1	1	Coupling body	Hardened steel, Zn-Ni			
Item	Qty	Description	Material			
State		Drawn	Checked	Approved	Date	
Production		CABANUN	PESV	JOER	2024-06-05	
		Coupling TLX 1 1/2" - 1 7/8"-12UN fem HNBR - SAE 1 1/2" ORB		ECO	Former No.	Scale
				001683		1 : 1
		Drawing No.			Issue	Sheet
		109071605			B	1 /(1)