


This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©

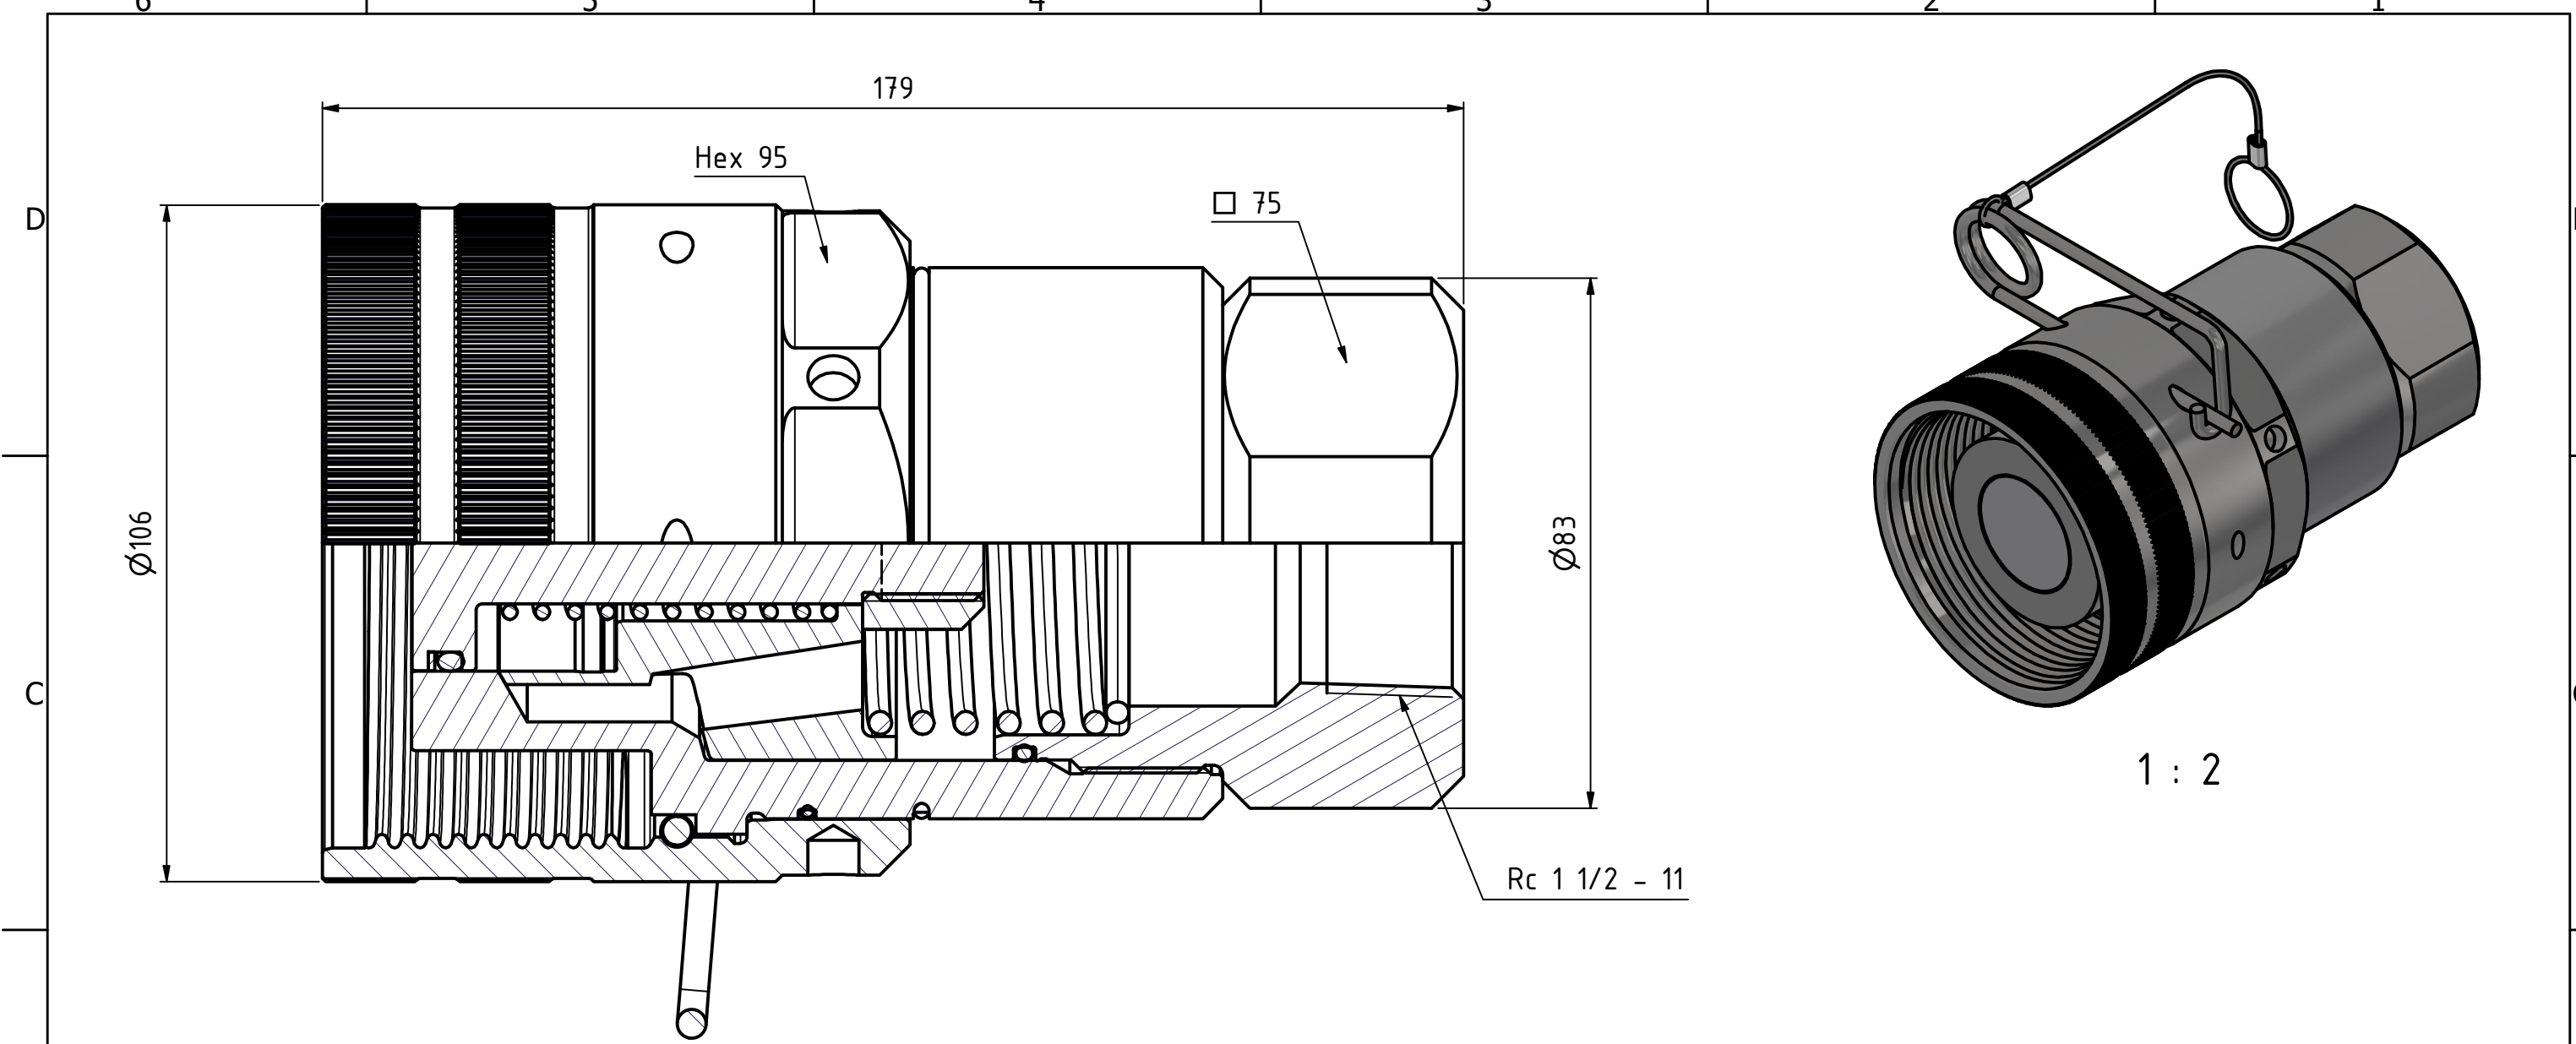

B-B

1 : 2

Product No. 109076105	
Nominal flow Ø DN:	32 mm
Connection Stroke:	mm
Max WP Connected:	380 bar
Max WP Disconnected:	380 bar
Min BP Connected:	1520 bar
Min BP Disconnected:	1000 bar
Temperature range:	-30°C - +120°C
Connection:	Rc 1 1/2"
Sealing material:	HNBR
Hexagon:	

9	1	O-ring	HNBR
8	1	O-ring	HNBR
7	1	Semi A. - Valve	HNBR
6	1	Semi A. Lock. pin + wire	
5	1	Semi A. Nipple Body	
4	1	Wire coil	Stainless steel
3	1	Spring	Stainless steel
2	1	Back part	Steel, Zn-Ni transp.
1	1	Locking sleeve	Steel, Zn-Ni transp.
Item	Qty	Description	Material
State		Drawn	Checked
Production		CABANUN	PESV
ECO		Approved	Date
001683		JOER	2024-06-05
Former No.		Scale	
		1 : 1	
Drawing No.		Issue	Sheet
109076105		B	1 /(1)



Nipple TLX 1 1/2" - Rc 1 1/2" fem HNBR