

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B



A

D

C

B

A

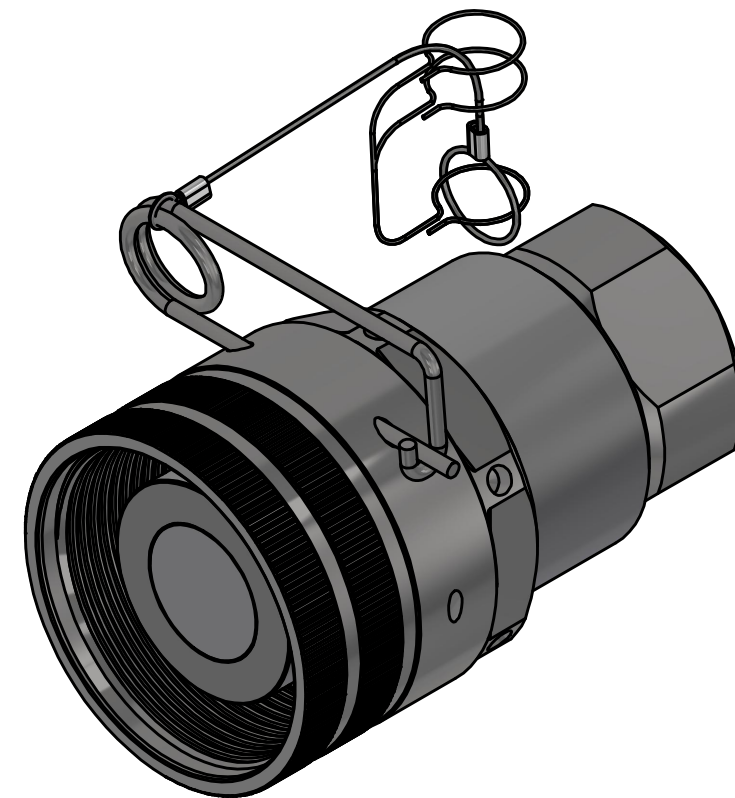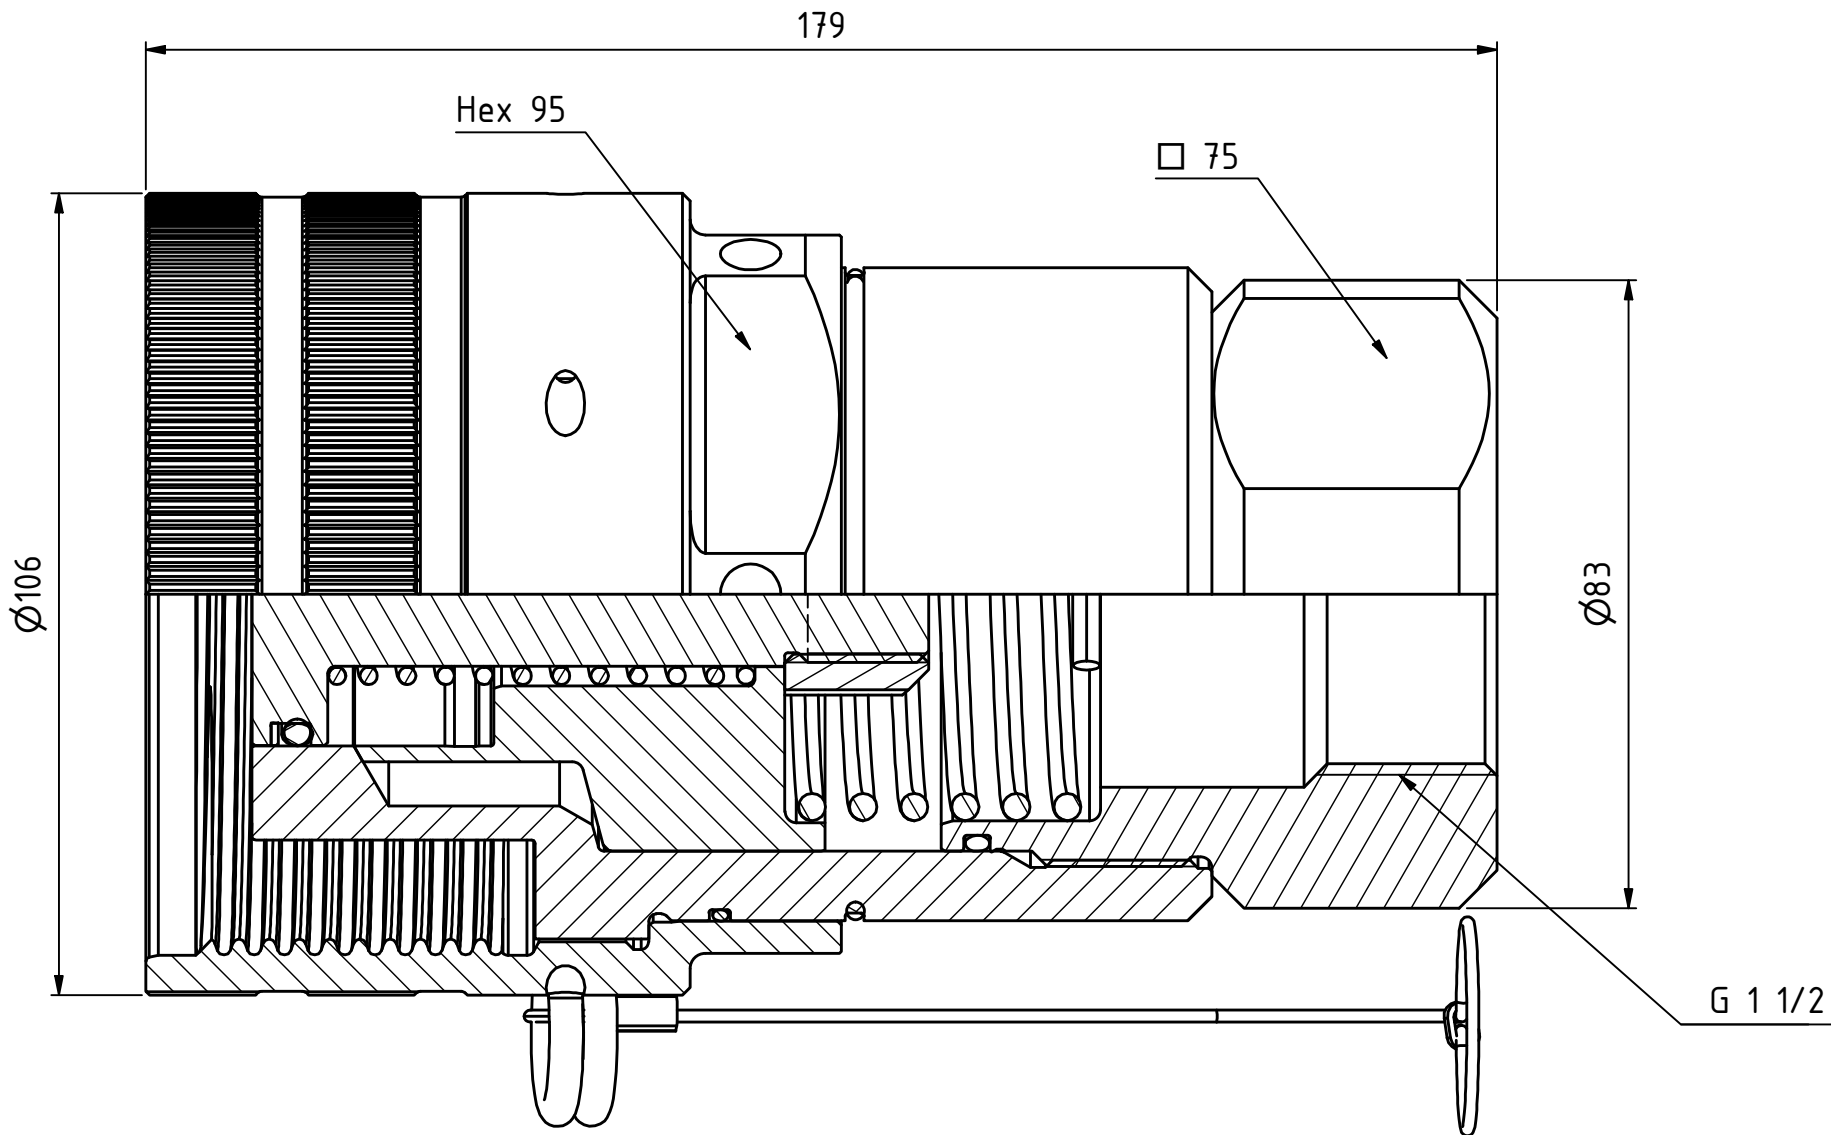

1 : 2

Product No. 109076205

Nominal flow Ø DN: 32 mm
Connection Stroke: mm
Max WP Connected: 380 bar
Max WP Disconnected: 380 bar
Min BP Connected: 1520 bar
Min BP Disconnected: 1000 bar
Temperature range: -30°C - +120°C
Connection: G 1 1/2"
Sealing material: HNBR
Hexagon:

9	1	O-ring	HNBR
8	1	O-ring	HNBR
7	1	Semi A. - Valve HNBR	
6	1	Semi A. Lock. pin + wire	
5	1	Semi A. Nipple Body	
4	1	Wire coil	Stainless steel
3	1	Spring	Stainless steel
2	1	Back part	Steel, Zn-Ni transp.
1	1	Locking sleeve	Steel, Zn-Ni transp
Item	Qty	Description	Material

State Production	Drawn CABANUN	Checked PESV	Approved JOER	Date 2024-06-05
Nipple TLX 1 1/2" - G 1 1/2" fem HNBR		ECO 001683	Former No.	Scale 1 : 1
		Drawing No. 109076205	Issue B	Sheet 1 /(1)