

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B

A

Ø106


Hex 95

□ 75

Ø83

1 1/2 - 11,5 NPT

179

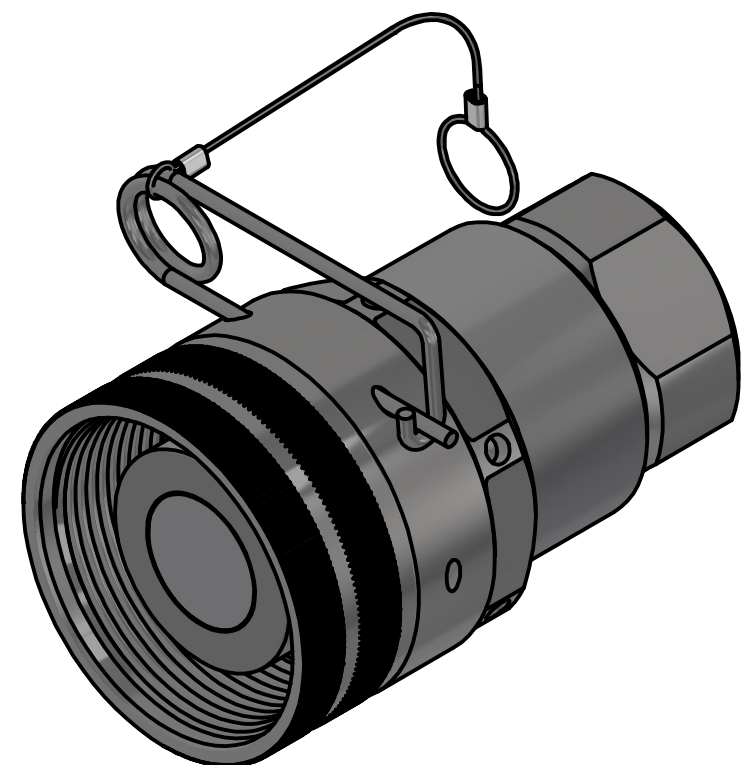

1 : 2

Product No. 109076405	
Nominal flow Ø DN:	32 mm
Connection Stroke:	mm
Max WP Connected:	380 bar
Max WP Disconnected:	380 bar
Min BP Connected:	1520 bar
Min BP Disconnected:	1000 bar
Temperature range:	-30°C - +120°C
Connection:	1 1/2" NPT
Sealing material:	HNBR
Hexagon:	

9	1	O-ring	HNBR			
8	1	O-ring	HNBR			
7	1	Semi A. - Valve HNBR				
6	1	Semi A. Lock. pin + wire				
5	1	Semi A. Nipple Body				
4	1	Wire coil	Stainless steel			
3	1	Spring	Stainless steel			
2	1	Back part	Steel, Zn-Ni transp.			
1	1	Locking sleeve	Steel, Zn-Ni transp			
Item	Qty	Description	Material			
State Production		Drawn CABANUN	Checked PESV	Approved JOER	Date 2024-06-05	
 Nipple TLX 1 1/2" - 1 1/2" NPT fem HNBR		ECO 001683		Former No.		Scale 1 : 1
		Drawing No. 109076405			Issue B	Sheet 1 /(1)